



### Electrical specifications

**Center Frequency:** 433 MHz  
**Bandwidth:**  $F_0 \pm 17$  MHz  
**VSWR in BW:** 1.7 : 1 Typical  
**Input / Output Impedance:** 50 Ohms  
**Passband:** 424.5-441.5 MHz  
**Passband Insertion Loss:** 3.0 dB max  
**Passband Ripple:** 1.5 dB max  
**Rejection:** 25 dBc min at DC to 380 MHz  
**Rejection 2:** 25 dBc min at 495 MHz  
**Power Handling:** 1 watt typ.

### Mechanical


**Mounting Method:** SMT  
**Dimensions:** 22.9 x 18 x 5 mm

### Environmental

**Operating Temperature:** -30°C to +75°C  
**Storage Temperature:** -50°C to +90°C

This product is RoHS compliant.

### Outline Drawing:

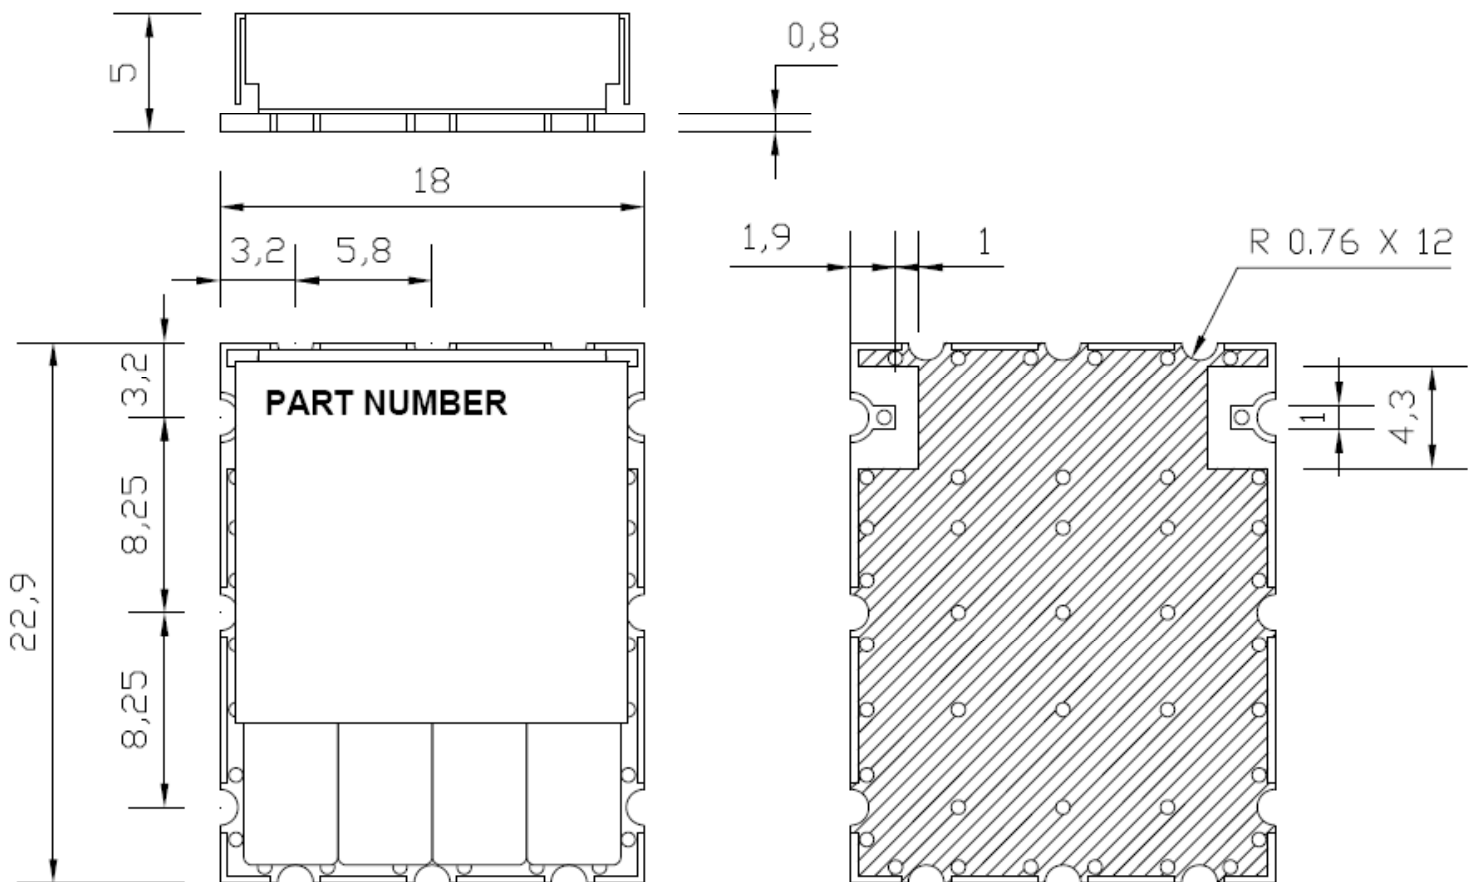

UNIT : mm