


Steward

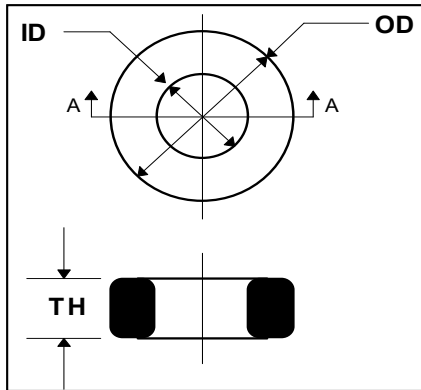

CORE DIMENSIONS				33T0500-100	
UNCOATED CORE					
	MM	INCHES	MM	INCHES	
OD	12.70	(.500)	.25	(.010)	
ID	7.92	(.312)	.25	(.010)	
TH	6.35	(.250)	.18	(.007)	

WEIGHT / K 2.3596 KGS 5.2020 LBS
 INITIAL PERMEABILITY 2700

ELECTRICAL SPECIFICATION									
	MIN. TOL.	MIN. (μH)	NOM. (μH)	MAX. (μH)	MAX. TOL.	FREQ. (kHz)	VOLT. (mV)	GAUSS	TURNS
L1	-20.0%	1.30	1.619	1.94	20.0%	100	6.61	10	1
L2	-20.0%	129.5	161.93	194.3	20.0%	100	66.15	10	10
Q Ref.		62					6.61	10	1

NOTES:



Rev	Description	Date	INT
A	Original Draft	2/24/2006	WMM
B	Revised Template	4/9/2006	WMM

Date: 4/9/06	DWG # 33T0500-100-B	Rev: B
Drawn By: WMM	Title # 33T0500-100	

Steward This document contains information which is proprietary to Steward. No production or publication of this document in whole or in part shall be made without written authorization from Steward.

UNCONTROLLED DOCUMENT