



SEE DETAIL "A"
SECTION A-A

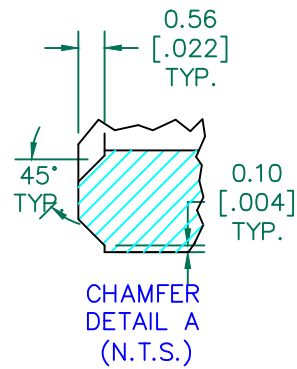

IMPEDANCE (Z)			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	69 Ω	145 Ω	270 Ω
Minimum	- Ω	116 Ω	- Ω

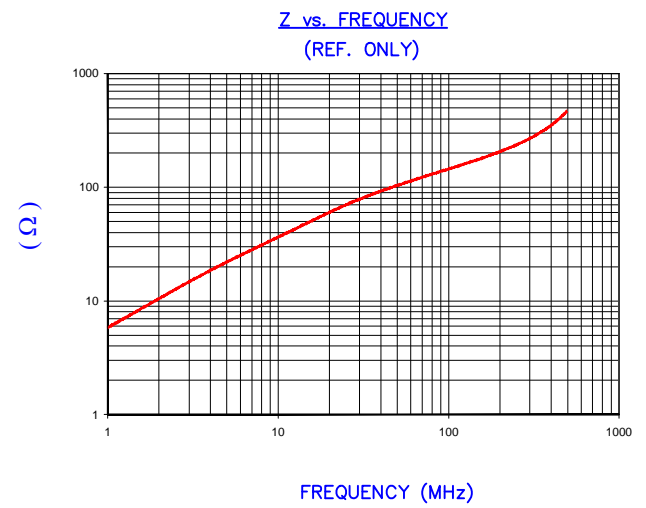


AGILENT E4991A Impedance/Material Analyzer
HP 16092A Test Fixture, REF#2999

FERRITE CORE DIMENSIONS (SPEC): mm [in]

A	14.27 [.562]	±	0.25 [.010]
B	6.35 [.250]	±	0.15 [.006]
C	10.16 [.400]	±	0.25 [.010]

WEIGHT/1000 6.30 kgs 13.9 lbs

NOTES: UNLESS OTHERWISE SPECIFIED
1. COSMETIC SPECIFICATION REFER TO WI-QA-038.

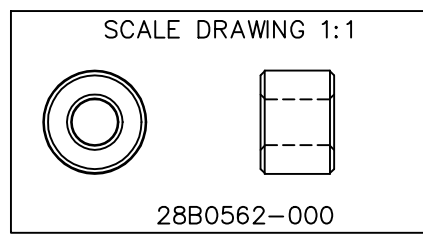

DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.		Laird	
L	UPDATE THE LOGO	05/13/15	QIU	PROJECT/PART NUMBER:	28B0562-000	REV	L
K	CHG CHAMFER DESIGN BACK TO ANGLED	04/10/09	JRK	PART TYPE:	CNZ CORE	DRAWN BY: DJB	
J	CHG CHAMFER DESIGN UPDATE LOGO	03/20/09	JRK	DATE:	12/18/91	SCALE:	2 : 1
H	UPDATE MIN Z SPEC & COMPANY LOGO	07/10/07	JRK	CAD #	28B0562-000-L	TOOL #	B0562
G	UPDATE MIN Z SPEC @100 MHZ	10/04/06	JRK	MATERIAL:		Ferrite	
F	UPDATE MIN Z SPEC, ADD TEST REF	12/3/04	JRK				
REV	DESCRIPTION	DATE	INT				