

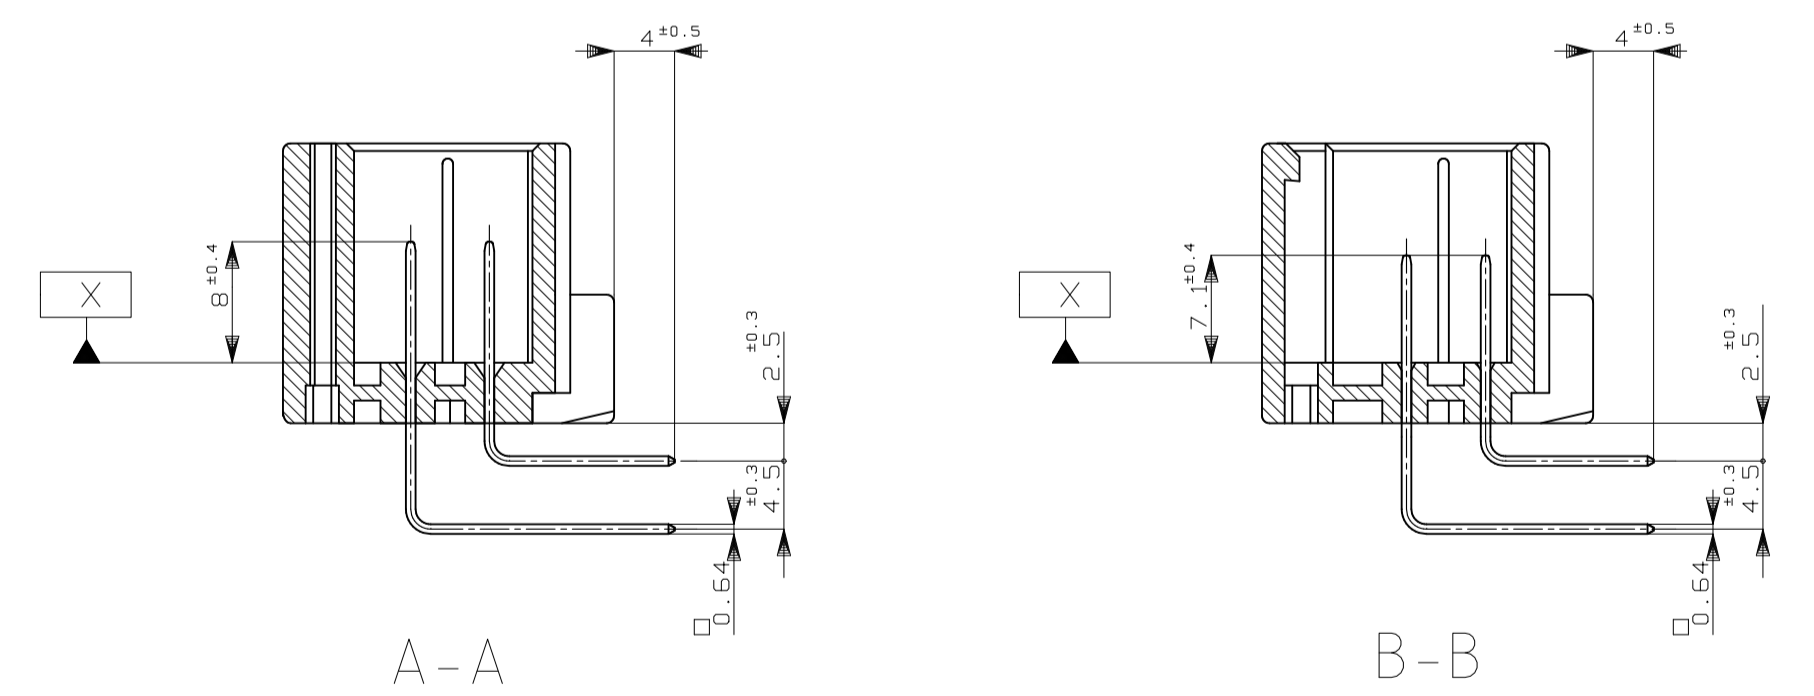
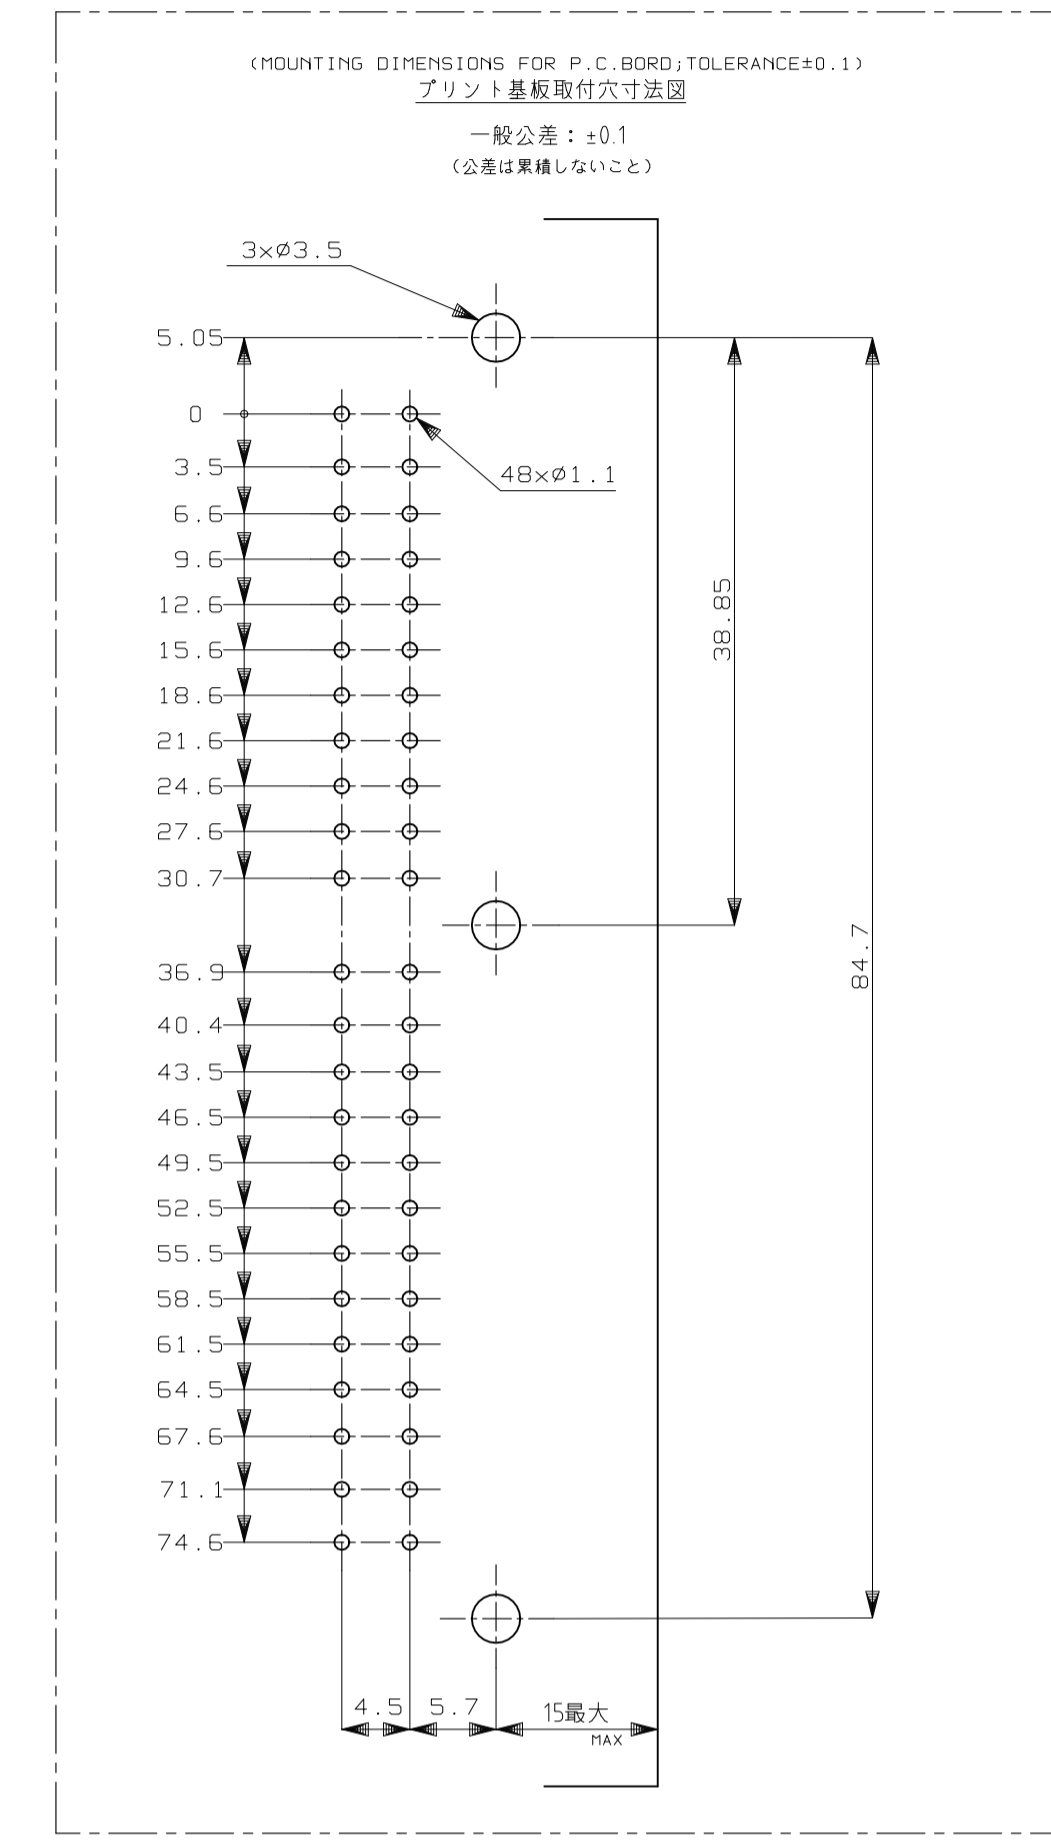
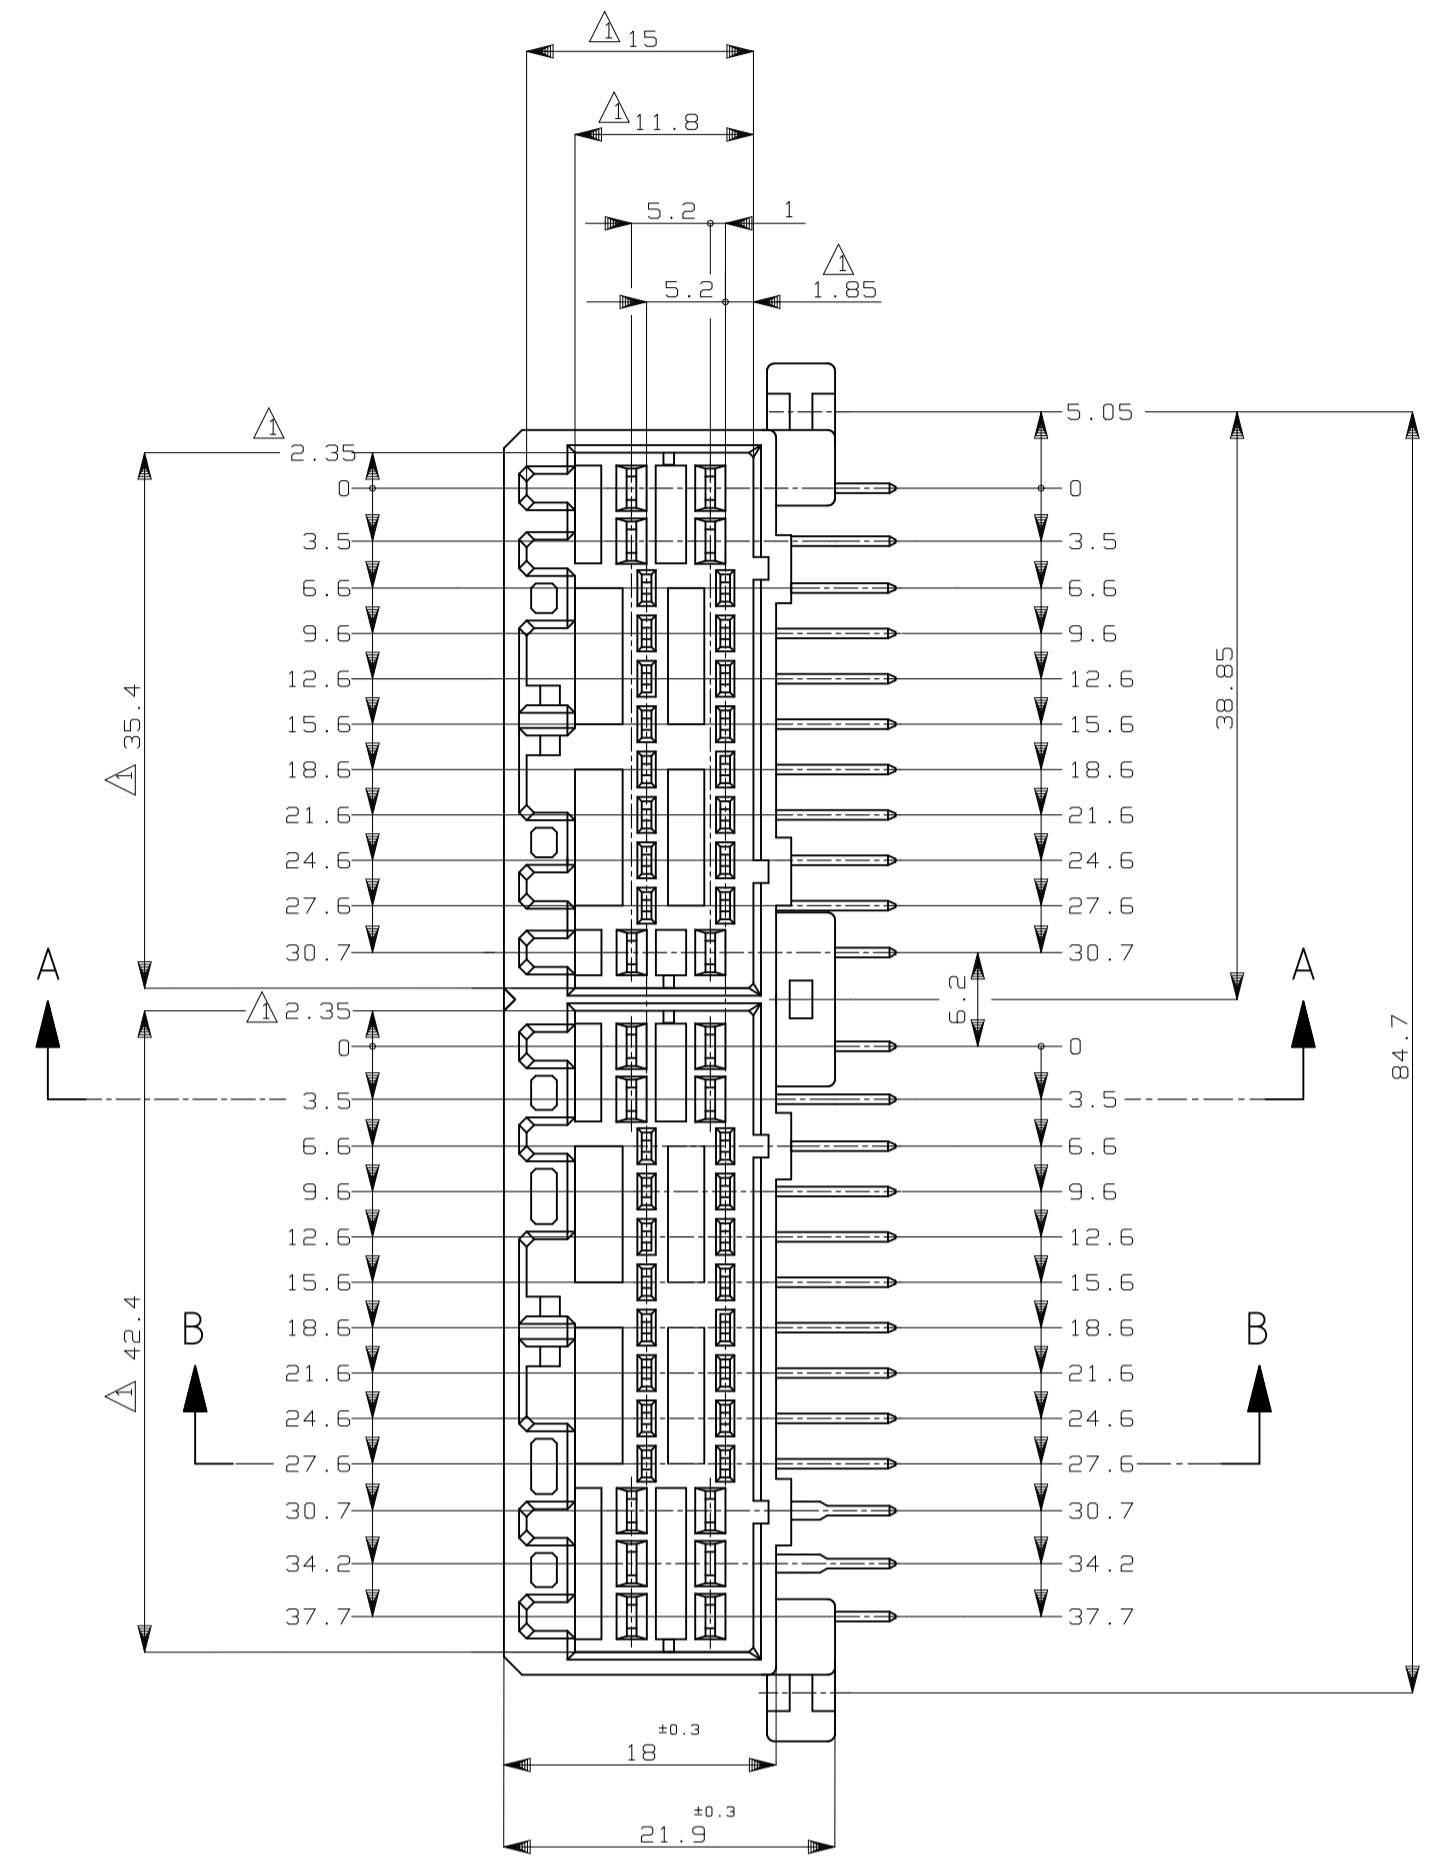


REVISIONS					
REV	DATE	DESCRIPTION	BY	CHK	APP
M8	05SEP2016	REVISION ECR-16-003276	KF	HY	
M9	24NOV2022	REVISION PER ECR-22-154022	RK	MT	

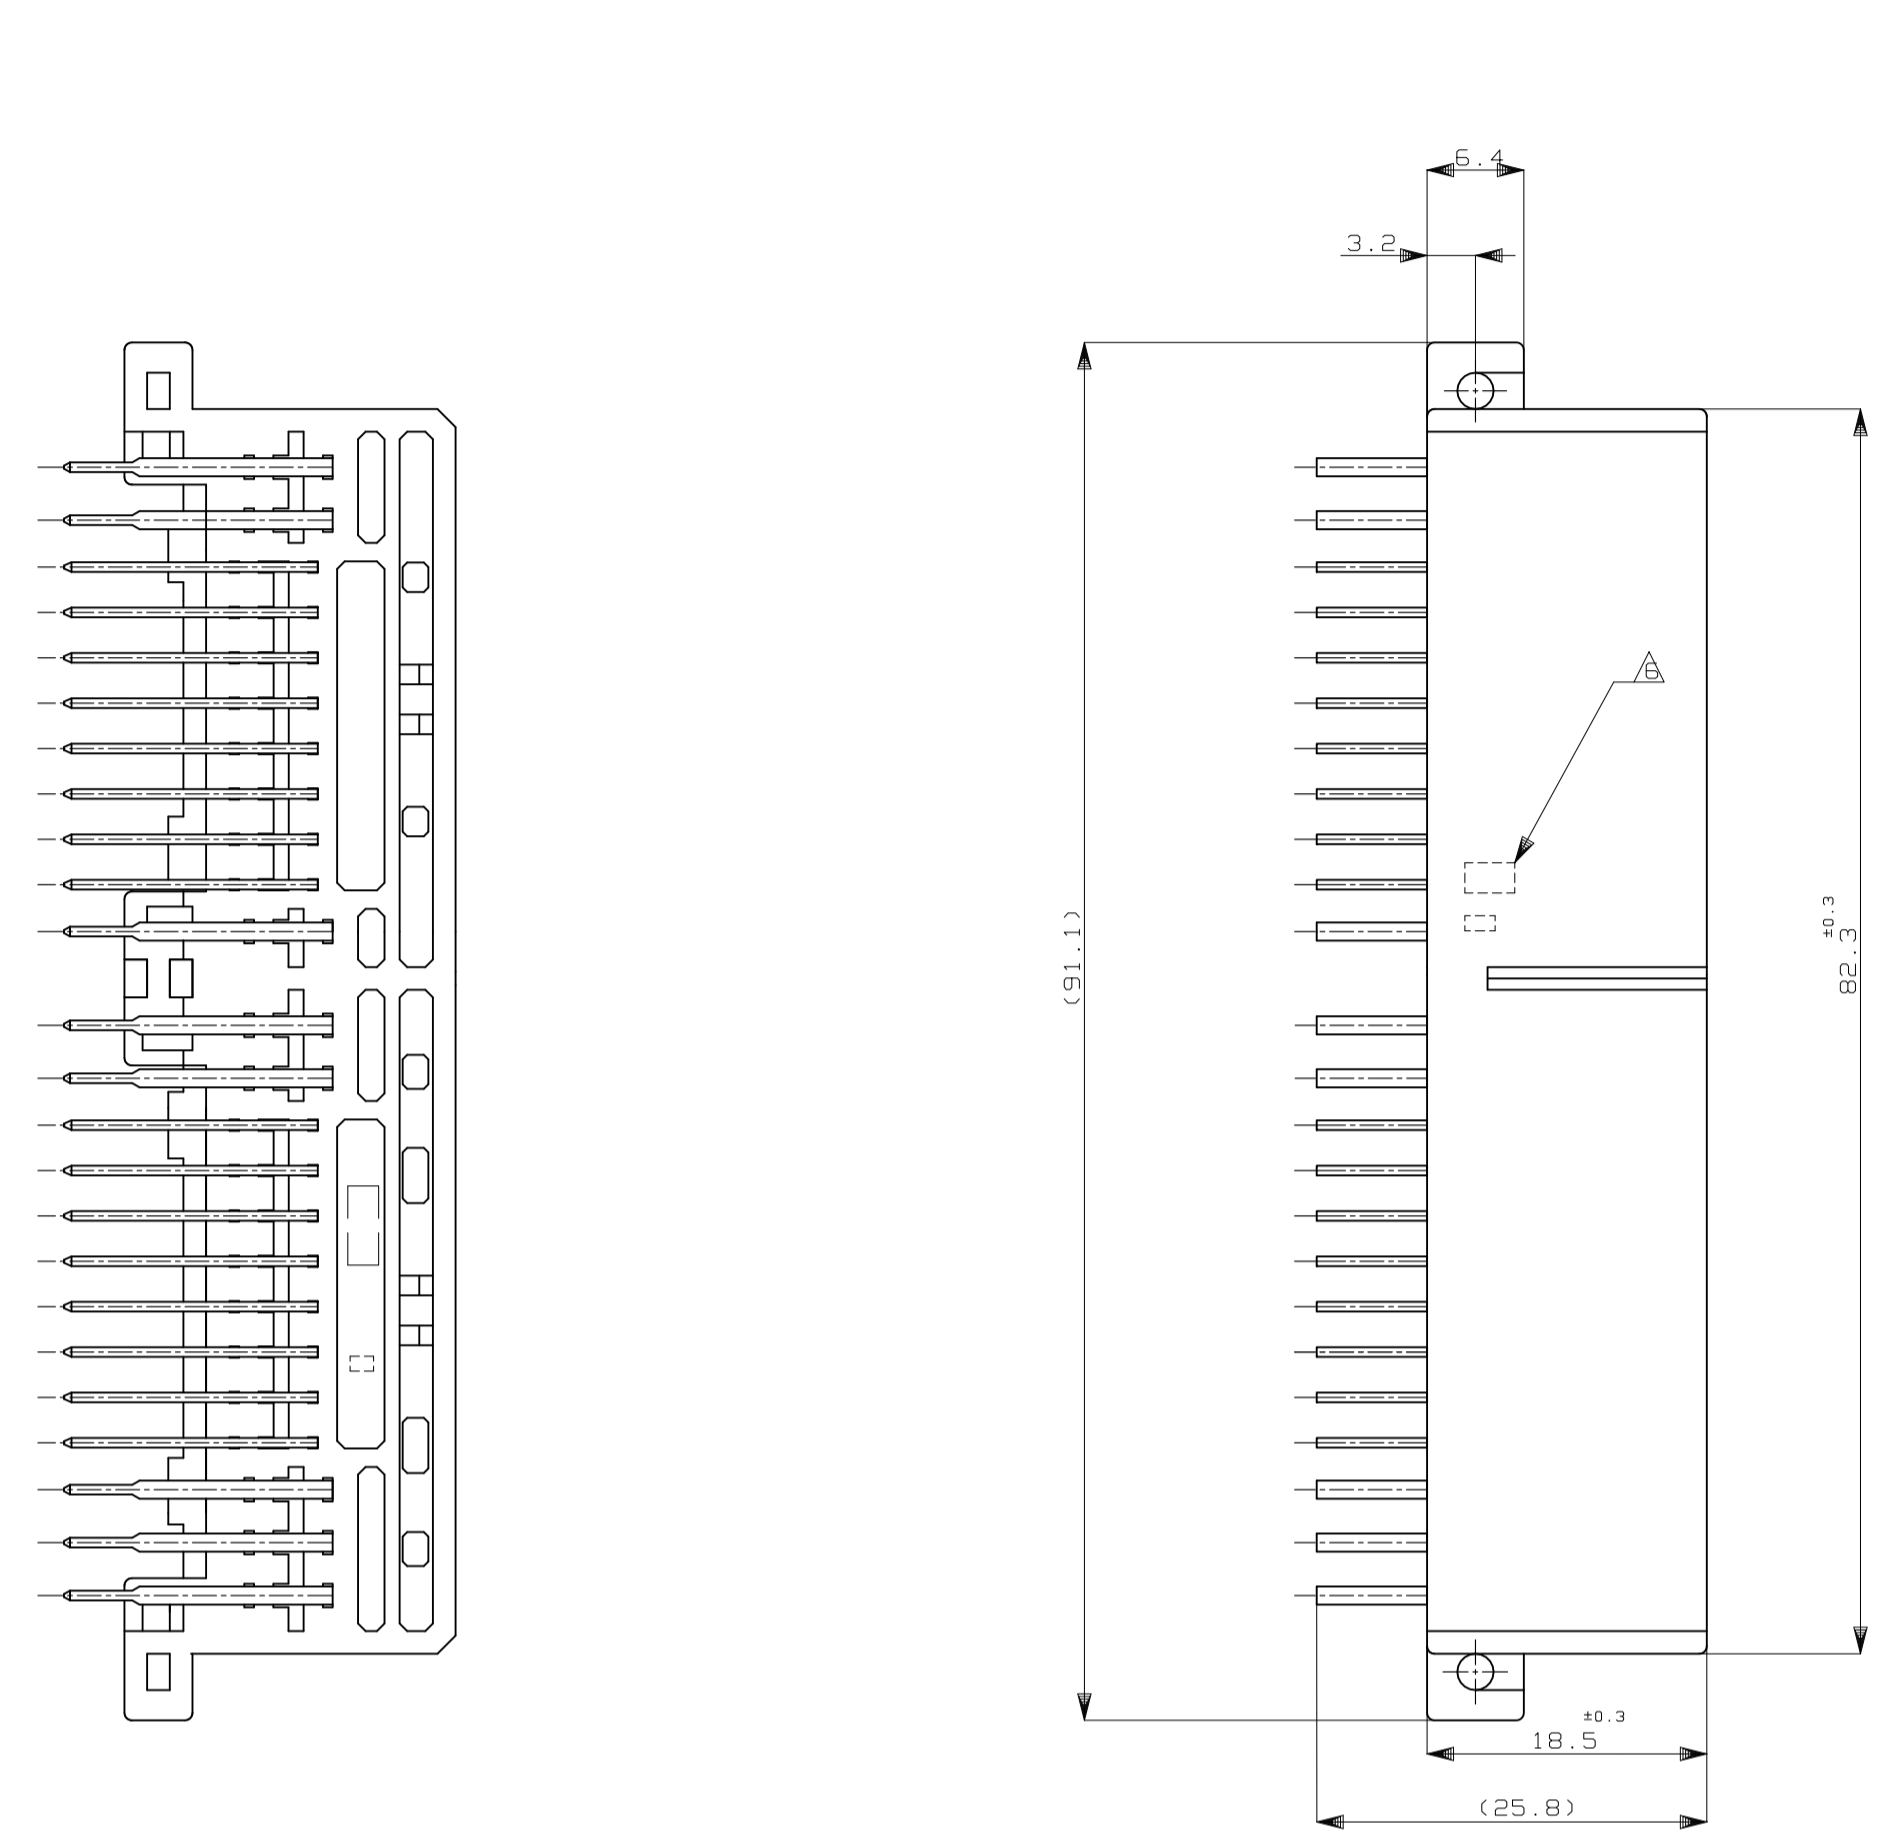

- 1. 面から2mmの範囲で測定
- 2. 嵌合相手ハジング型 174515, 174516, 917989, 917992
- 3. 推奨取付ねじ: JIS B1115, B1112 タップピンねじ, なべ2種  
呼び径3, 長さ6mm以下 (締付けトルク: 39N・cm (4kgf・cm) 以下)
- 4. 適用製品規格番号: 108-5280, 108-5342

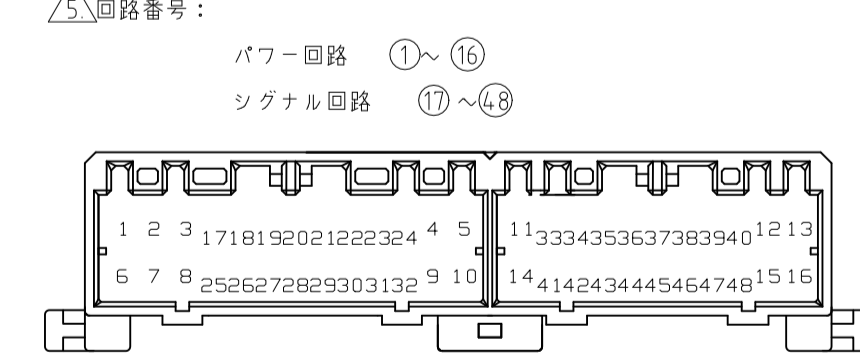

△ 6. コンタクト仕上識別マーク

- △ MUST BE KEPT BETWEEN X AND 2
- 2. THE MATING PLUG HSG. PART NUMBER, 174515, 174516, 917989, 917992
- 3. RECOMMENDED MOUNTING SCREW, 3mm DIA, 6mm LENGTH (MAX.)  
PAN HEAD, CLASS 2 TAPPING SCREW SPECIFIED IN JIS B1115, B1122  
(TIGHTENING TORQUE, 39.2N・cm (4kgf・cm) MAX.)
- 4. APPLICABLE PRODUCT SPEC NO.: 108-5280, 108-5342
- △ CIRCUIT NUMBER  
POWER CIRCUIT NO. ① ~ ①⑥  
SIGNAL CIRCUIT NO. ⑰ ~ ④⑧
- △ MARKING FOR DISCERNMENT OF THE CONTACT FINISH

REV	DESCRIPTION	DATE	BY	CHK	APP
54	SELECTIVE-TIN (MATT) SELECTIVE GOLD x 16				
57	SELECTIVE-TIN (MATT) SELECTIVE GOLD x 5				
56	SELECTIVE-TIN (MATT) SELECTIVE GOLD x 7				
58	SELECTIVE-TIN (MATT) SELECTIVE GOLD x 10				
50	SELECTIVE-TIN (MATT) SELECTIVE GOLD x 8				
55	SELECTIVE-TIN (MATT) SELECTIVE GOLD x 40				
52	SELECTIVE-TIN (MATT) SELECTIVE GOLD x 15				
8	TIN-LEAD SELECTIVE GOLD x 33				
7	TIN-LEAD PRE-TIN x 38				
4	TIN-LEAD PRE-TIN x 43				
3	TIN-LEAD PRE-TIN x 32				
2	TIN-LEAD PRE-TIN x 33				
0	PRE-TIN x 48				
0	PRE-TIN x 48				
0	PRE-TIN x 48				
0	PRE-TIN x 48				
0	SELECTIVE-TIN (MATT) SELECTIVE-TIN (BRIGHT) x 48				
0	PRE-TIN x 48				

THIS DRAWING IS A CONTROLLED DOCUMENT.

TE Connectivity

48POSITION CAP HOUSING ASSEMBLY  
040/070 SERIES HYBRID I/O CONNECTOR

WEIGHT 24.1 g

SCALE 2:1 SHEET 1 of 1 REV M9