


環保物料專用  
RoHS compliant

NOTES: UNLESS OTHERWISE SPECIFIED.

- 1、 Important Dim.: (A)
- 2、 Crimping PullOut Force: 1.10Kg Min.
- 3、 Electrical Character: 100% Open/Short
- 4、 The red and blue wires are crossed

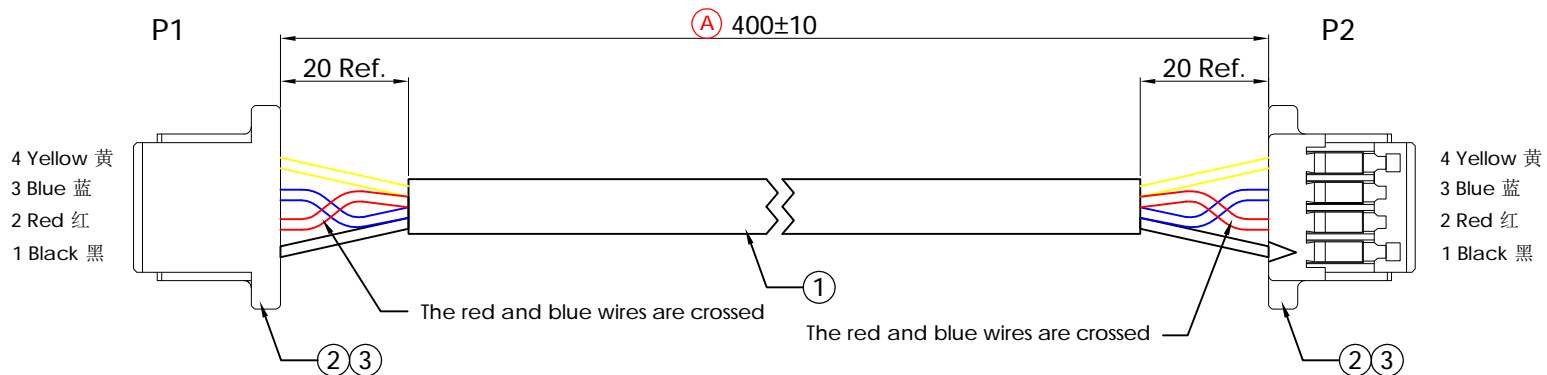

Bill Of Material

3	KWQS230	TER.	PH1.0 Phosphor Bronze, Tin Plating	PCS	8
2	KWQS230	CONN.	1.0 mm SH Housing 4P Black	PCS	2
1	KWQS248	Cable	28AWGX4C FLAT WIRE Black	mm	
No.	Vendor	NAME	Material Name and Name	Unit	Qty

Wire Diagram		
CONN P1	CONN P2	COLOR
1	1	Black 黑
2	2	Red 红
3	3	Blue 蓝
4	4	Yellow 黄



DESCRIPTION(内容):  
1.0PITCH HOUSING WIRE HARNESS

DRAWN(製圖):  
**Tom Liu**

CHECKED(確認):  
**Jack Wu**

APPROVAL(核准):  
**Kane He**

GENERAL TOLERANCE

LINEAR	ANGLES
X.: ±0.30	X°: ±5.0°
X.X: ±0.20	X.X°: ±3.0°
X.XX: ±0.15	X.XX°: ±2.0°
X.XXX: ±0.10	X.XXX°: ±1.0°

REV:  
A/2

UNIT:  
mm

SHEET:  
1/1

REV

1

2

3

4

DESCRIPTION

ORIGINAL

Change Wire sequence Flat Cable


DATE

Jan-08-2022

Jan-17-2022

A4

SCALE(比例):  
1:XX



PART NO:  
(料號) CBH-C16999-001  
DWG NO(圖號): KWRD220108-021

A

B

C

D

E