


# Disc Thermostat, .500" Dia, Snap Action

## Features

- Loose Bracket, Stainless Steel Cap
- .250" Quick Connect Terminals
- Automatic Reset
- Enclosed Disc
- Surface Mount
- RoHS Compliant



## F-13

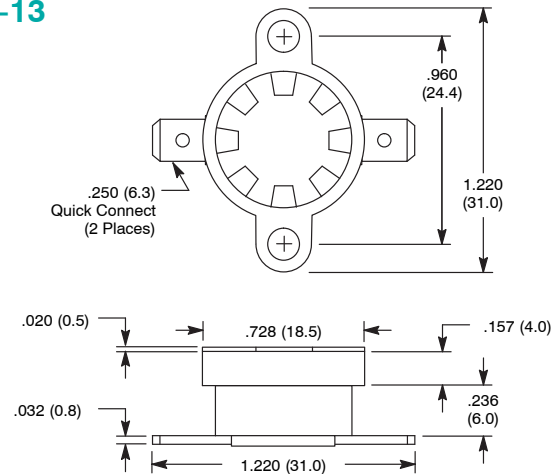

NTE Type No.	Temperature		Function	Diag No.
	Open	Close		
NTE-DTO60	60 ±5°F	40 ±6°F	Open on Rise	F-13
NTE-DTO85	85 ±5°F	70 ±6°F	Open on Rise	F-13
NTE-DTC100	70 ±5°F	100 ±7°F	Close on Rise	F-13
NTE-DTO110	110 ±5°F	80 ±7°F	Open on Rise	F-13
NTE-DTO120	120 ±5°F	90 ±8°F	Open on Rise	F-13
NTE-DTC120	90 ±8°F	120 ±7°F	Close on Rise	F-13
NTE-DTO140	140 ±7°F	110 ±8°F	Open on Rise	F-13
NTE-DTC140	110 ±5°F	140 ±7°F	Close on Rise	F-13
NTE-DTO150	150 ±5°F	120 ±8°F	Open on Rise	F-13
NTE-DTO160	160 ±5°F	130 ±8°F	Open on Rise	F-13
NTE-DTO170	170 ±5°F	140 ±8°F	Open on Rise	F-13
NTE-DTC170	140 ±5°F	170 ±8°F	Close on Rise	F-13
NTE-DTO175	175 ±5°F	160 ±6°F	Open on Rise	F-13
NTE-DTO180	180 ±5°F	150 ±8°F	Open on Rise	F-13
NTE-DTC180	150 ±5°F	180 ±8°F	Close on Rise	F-13
NTE-DTO190	190 ±5°F	160 ±8°F	Open on Rise	F-13
NTE-DTO210	210 ±5°F	180 ±8°F	Open on Rise	F-13
NTE-DTO220	220 ±6°F	190 ±8°F	Open on Rise	F-13
NTE-DTC225	195 ±5°F	225 ±8°F	Close on Rise	F-13
NTE-DTO230	230 ±6°F	200 ±8°F	Open on Rise	F-13
NTE-DTC240	140 ±11°F	240 ±11°F	Close on Rise	F-13
NTE-DTO250	250 ±6°F	220 ±10°F	Open on Rise	F-13
NTE-DTO320	320 ±10°F	275 ±15°F	Open on Rise	F-13

## Specifications

**Electrical Rating:** 15A, 125VAC; 10A, 250VAC (Resistive Load)  
**Contact Mode:** NC, NO  
**Insulation Resistance:** 500VDC / 0.5mA / 1 minute  
**Dielectric Strength:** 2000VAC / 0.5mA for 1 minute  
**Normal Isolated Resistance:** > 100MΩ  
**Protection Grade:** IP20