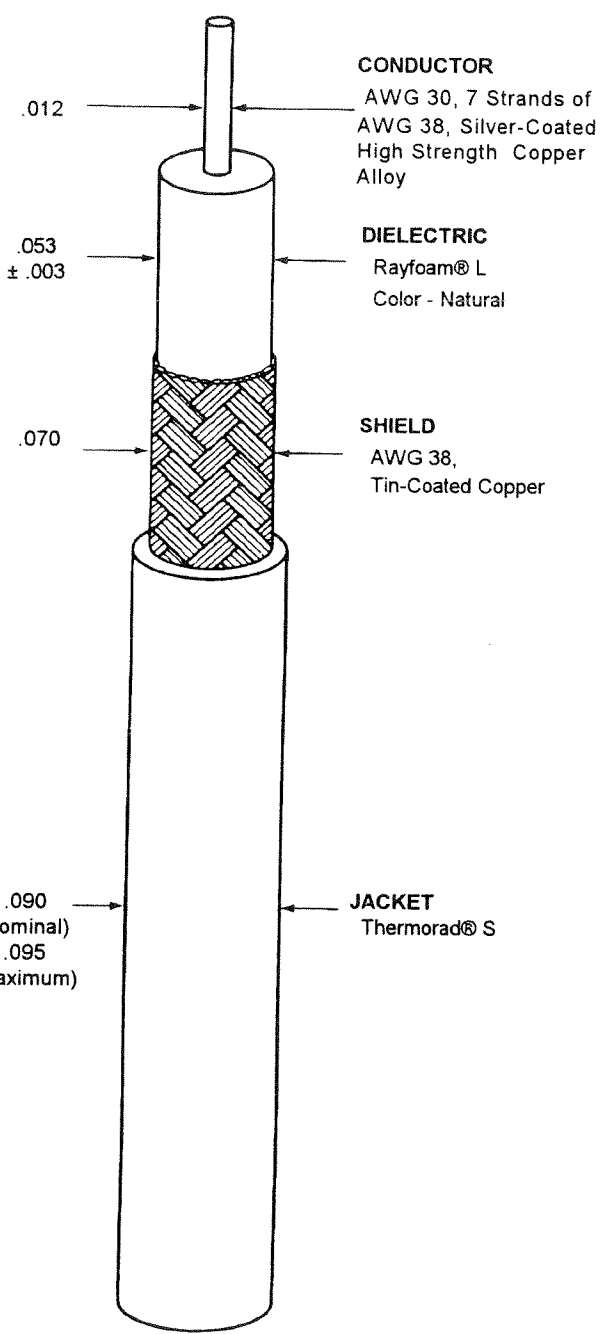


THIS SPECIFICATION SHEET FORMS A PART OF THE LATEST ISSUE OF RAYCHEM SPECIFICATION 1200.

| CONSTRUCTION DETAILS | ELECTRICAL CHARACTERISTICS | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|---|--------------------------|-----------------------|-------------------|--|-------------------------|------------------------------|-----------------------|---------------------------------------|--------------|--|------------|---------------------|--------------|---------------|--------------------------------|-----------------------------|----------------------|--|-----------------|-------------------------------|--------------|----------|------------|-------|---------------------------|-------------------------|--|--------------------------------|-----------------|--|-------------------------|--|------------|---------------|------------------|------------------------------------|--------|--|------------|----------------|------------------|------------------------------------|------------------|---------------------|-----------------|---------------|--------|----------------------------|
| <p>DIMENSIONS ARE NOMINAL VALUES IN INCHES UNLESS OTHERWISE DESIGNATED.</p> | <table border="0"> <tr> <td>CHARACTERISTIC IMPEDANCE</td> <td>75 ± 3 ohms, Method B</td> </tr> <tr> <td>CAPACITANCE</td> <td>18.3 pF/ft. (nominal) at 1 kHz 19.0 pF/ft. (maximum) at 1 kHz</td> </tr> <tr> <td>VELOCITY OF PROPAGATION</td> <td>74% (nominal)</td> </tr> </table> | CHARACTERISTIC IMPEDANCE | 75 ± 3 ohms, Method B | CAPACITANCE | 18.3 pF/ft. (nominal) at 1 kHz 19.0 pF/ft. (maximum) at 1 kHz | VELOCITY OF PROPAGATION | 74% (nominal) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CHARACTERISTIC IMPEDANCE | 75 ± 3 ohms, Method B | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CAPACITANCE | 18.3 pF/ft. (nominal) at 1 kHz 19.0 pF/ft. (maximum) at 1 kHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| VELOCITY OF PROPAGATION | 74% (nominal) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|  <p>CONDUCTOR AWG 30, 7 Strands of AWG 38, Silver-Coated High Strength Copper Alloy</p> <p>DIELECTRIC Rayfoam® L Color - Natural</p> <p>SHIELD AWG 38, Tin-Coated Copper</p> <p>JACKET Thermorad® S</p> <p>.012</p> <p>.053 ± .003</p> <p>.070</p> <p>.090 (nominal) .095 (maximum)</p> | <table border="0"> <tr> <th colspan="2" data-bbox="700 649 1486 712">ADDITIONAL REQUIREMENTS</th> </tr> <tr> <td colspan="2" data-bbox="700 712 1486 755">ELECTRICAL</td> </tr> <tr> <td>CONDUCTOR RESISTANCE</td> <td>116. ohms/1000 ft. (nominal)</td> </tr> <tr> <td>INSULATION RESISTANCE</td> <td>10,000 megohms (minimum) for 1000 ft.</td> </tr> <tr> <td>JACKET FLAWS</td> <td></td> </tr> <tr> <td> SPARK TEST</td> <td>1.0 kV (rms), 60 Hz</td> </tr> <tr> <td> IMPULSE TEST</td> <td>6.0 kV (peak)</td> </tr> <tr> <td>VOLTAGE WITHSTAND (DIELECTRIC)</td> <td>1000 volts (rms), (minimum)</td> </tr> <tr> <td colspan="2" data-bbox="700 1032 1486 1074">ENVIRONMENTAL</td> </tr> <tr> <td>AGING STABILITY</td> <td>135°C/-55°C/2.50 inch mandrel</td> </tr> <tr> <td>FLAMMABILITY</td> <td>Method C</td> </tr> <tr> <td>HEAT SHOCK</td> <td>225°C</td> </tr> <tr> <td>LOW TEMPERATURE-COLD BEND</td> <td>-55°C/2.50 inch mandrel</td> </tr> <tr> <td>VOLTAGE WITHSTAND (POST ENVIRONMENTAL)</td> <td>1000 volts (rms), for 1 minute</td> </tr> <tr> <td colspan="2" data-bbox="700 1308 1486 1351">PHYSICAL</td> </tr> <tr> <td>INSULATION (DIELECTRIC)</td> <td></td> </tr> <tr> <td> ELONGATION</td> <td>50% (minimum)</td> </tr> <tr> <td> TENSILE STRENGTH</td> <td>1000 lbf/in² (minimum)</td> </tr> <tr> <td>JACKET</td> <td></td> </tr> <tr> <td> ELONGATION</td> <td>250% (minimum)</td> </tr> <tr> <td> TENSILE STRENGTH</td> <td>2000 lbf/in² (minimum)</td> </tr> <tr> <td>JACKET THICKNESS</td> <td>.010 inch (nominal)</td> </tr> <tr> <td>SHIELD COVERAGE</td> <td>90% (minimum)</td> </tr> <tr> <td>WEIGHT</td> <td>5.6 lbs/1000 ft. (nominal)</td> </tr> </table> | ADDITIONAL REQUIREMENTS | | ELECTRICAL | | CONDUCTOR RESISTANCE | 116. ohms/1000 ft. (nominal) | INSULATION RESISTANCE | 10,000 megohms (minimum) for 1000 ft. | JACKET FLAWS | | SPARK TEST | 1.0 kV (rms), 60 Hz | IMPULSE TEST | 6.0 kV (peak) | VOLTAGE WITHSTAND (DIELECTRIC) | 1000 volts (rms), (minimum) | ENVIRONMENTAL | | AGING STABILITY | 135°C/-55°C/2.50 inch mandrel | FLAMMABILITY | Method C | HEAT SHOCK | 225°C | LOW TEMPERATURE-COLD BEND | -55°C/2.50 inch mandrel | VOLTAGE WITHSTAND (POST ENVIRONMENTAL) | 1000 volts (rms), for 1 minute | PHYSICAL | | INSULATION (DIELECTRIC) | | ELONGATION | 50% (minimum) | TENSILE STRENGTH | 1000 lbf/in ² (minimum) | JACKET | | ELONGATION | 250% (minimum) | TENSILE STRENGTH | 2000 lbf/in ² (minimum) | JACKET THICKNESS | .010 inch (nominal) | SHIELD COVERAGE | 90% (minimum) | WEIGHT | 5.6 lbs/1000 ft. (nominal) |
| ADDITIONAL REQUIREMENTS | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ELECTRICAL | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CONDUCTOR RESISTANCE | 116. ohms/1000 ft. (nominal) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| INSULATION RESISTANCE | 10,000 megohms (minimum) for 1000 ft. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| JACKET FLAWS | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| SPARK TEST | 1.0 kV (rms), 60 Hz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| IMPULSE TEST | 6.0 kV (peak) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| VOLTAGE WITHSTAND (DIELECTRIC) | 1000 volts (rms), (minimum) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ENVIRONMENTAL | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| AGING STABILITY | 135°C/-55°C/2.50 inch mandrel | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| FLAMMABILITY | Method C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| HEAT SHOCK | 225°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| LOW TEMPERATURE-COLD BEND | -55°C/2.50 inch mandrel | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| VOLTAGE WITHSTAND (POST ENVIRONMENTAL) | 1000 volts (rms), for 1 minute | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| PHYSICAL | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| INSULATION (DIELECTRIC) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ELONGATION | 50% (minimum) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TENSILE STRENGTH | 1000 lbf/in ² (minimum) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| JACKET | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ELONGATION | 250% (minimum) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TENSILE STRENGTH | 2000 lbf/in ² (minimum) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| JACKET THICKNESS | .010 inch (nominal) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| SHIELD COVERAGE | 90% (minimum) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| WEIGHT | 5.6 lbs/1000 ft. (nominal) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Outer jacket color will be black (designated by a "0" appended to the part number, e.g., 7530A13114-0) unless otherwise specified.

Designate outer jacket color with a dash number in accordance with MIL-STD-681.