
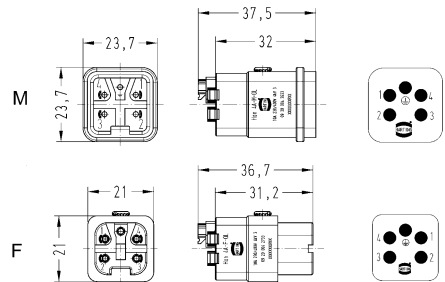


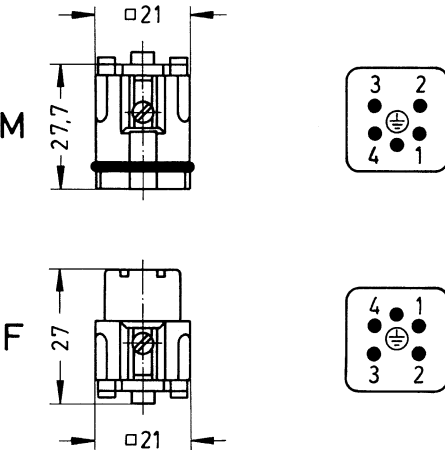


Number of contacts

4+

10 A 230/400 V 4 kV 3
10 A 250 V 4 kV 3

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<p>Han A[®], Han-Quick Lock[®] termination, Contact surface: Silver plated</p>  <p>Blue slide</p>	0.5 ... 2.5	09 20 004 2633	09 20 004 2733	 <p>Contact arrangement (view from termination side)</p>
<p>Han A[®], Han-Quick Lock[®] termination, Contact surface: Silver plated</p>  <p>Black slide</p>	0.25 ... 1.5	09 20 004 2634	09 20 004 2734	
<p>Han A[®], Screw termination, Contact surface: Silver plated</p> 	0.75 ... 1.5	09 20 004 2611	09 20 004 2711	 <p>Contact arrangement (view from termination side) Stripping length 4.5 mm Tightening torque 0.25 Nm</p>