

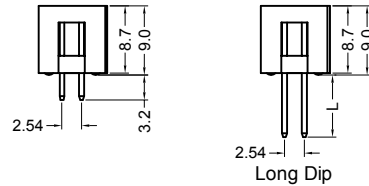
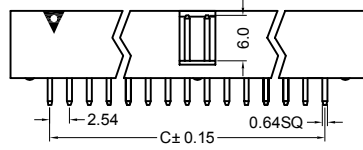

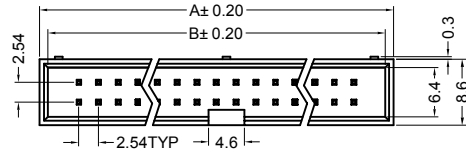




Straight Type



Right Angle Type

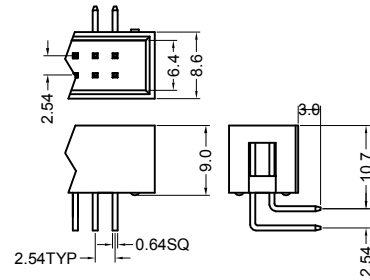

Surface Mount Type



材质 Material:

绝缘体 Insulator: Glass filled PBT UL94V-0
 接触件 Contacts: Brass
 电镀层 Plating: Whole Gold plated over Nickel

电气性能 Electrical Characteristics:

接触电阻 Contact Resistance: 30mΩmax. at DC 100mA
 绝缘电阻 Insulator Resistance: 1000MΩmin. at 500V DC
 耐压 Withstanding Voltage: 1000V AC/rms 50Hz For 1 minute
 工作电流 Current Rating: 2 AMP

使用温度范围 Operating Temperature: -40°C ~ +105°C

Dimension

position	A	B	C	position	A	B	C
06	15.24	13.04	5.08	26	40.64	38.44	30.48
08	17.78	15.58	7.62	30	45.72	43.52	35.56
10	20.32	18.12	10.16	34	50.80	48.60	40.64
14	25.40	23.20	15.24	40	58.42	56.22	48.26
16	27.94	25.74	17.78	50	71.12	68.92	60.96
20	33.02	30.82	22.86	60	83.82	81.62	73.66
24	38.10	35.90	27.94	64	88.90	86.70	78.74

				TITLE BOX HEADER 2.54mm (0.100") DC3簡易牛角插針		GENERAL TOLERANCE x. : ±0.3 x.x: ±0.2 x.xx: ±0.1		DRAWN BY DATE		DENK DENG KE CONNECTOR ELECTRONICS CO., LTD 登科電子有限公司		
				SERIES DK301-XX-X-X-X		ANGLE TOLERANCE x. : ±2° x.x: ±1° x.xx: ±0.5°		CHECKED BY DATE				
				CUSTOMER P/N		APPROVED BY DATE		DRAWING NO.				SHEET 1 OF 1
SCALE	DESCRIPTION	CHK	DATE	SCALE	mm	PROJECTION			SHEET SIZE A4		REV.	A0