
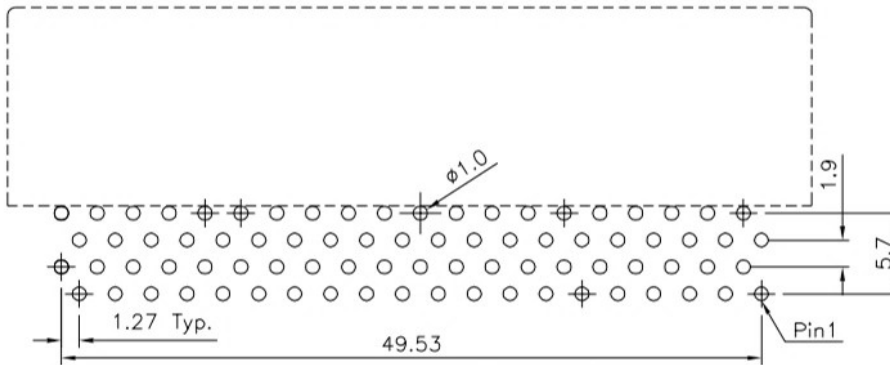
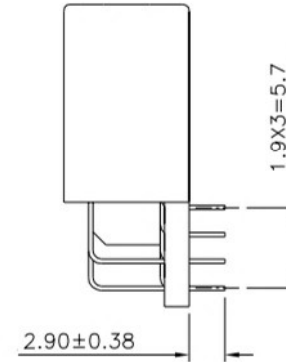
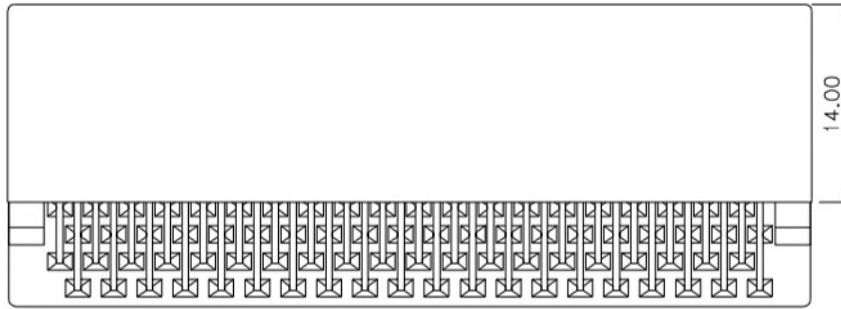


SPECIFICATION

Current Rating:1 Amp
Voltage Rating:250V AC RMS
Dielectric Withstanding Voltage:500V AC RMS 60Hz
For 1 Minute
Contact Resistance:30 Milliohms Max. At 1 Amp DC
Insulation Resistance:1000 Megaohms Min.
At 500V DC
Temperature Range:-55°C~+85°C
Insulator:PA66+G.F.
Contact:Brass
Gold Flash On Contact Area,Tin Plated
On Solder Tails,Over Nickel
RoHS Compliant

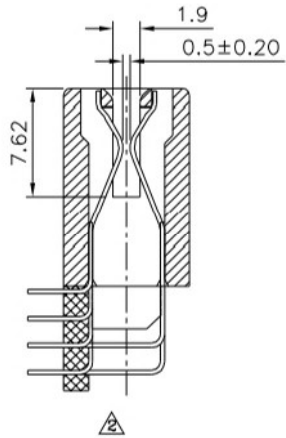

Recommended P.C.B. Layout(Top View)

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.
10156

APPROVED BY
MEI
CHECKED BY
HZF
DRAWING BY
CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
0~10 ±0.20
10~30 ±0.30
30~100 ±0.40
100~300 ±0.50
ANG. ±0.5°

△ B3	Modify Data	HZF	01/30/2019
△ B2	Modify Data	HZF	01/17/2019
△ B1	Modify Data	HZF	11/07/2015
△ B0	NEW RELEASE	HZF	09/08/2014
NO. REV.	REVISIONS	CHK	DATE

SCALE NONE REV. B3 UNIT mm