

Han-Power S with PSU 24 VDC/2A

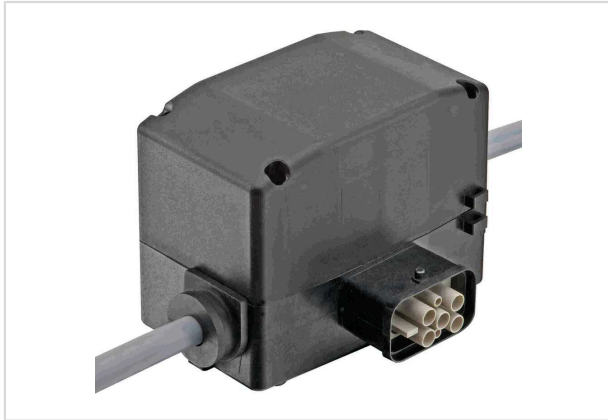


Image is for illustration purposes only. Please refer to product description.

| | |
|---------------|--------------------------------|
| Part number | 09 12 008 4610 |
| Specification | Han-Power S with PSU 24 VDC/2A |

Identification

| | |
|--------------------------|--|
| Category | Energy distributors |
| Series of hoods/housings | Han-Power® S |
| Element | Energy distributor |
| Specification | With 1x Han® Q 4/2 With power supply 24 V |

Version

| | |
|---------------------------|--|
| Termination method | IDC insulation displacement termination for stranded wires according to IEC 60228 Class 5 |
| Number of contacts | 6 |
| Number of signal contacts | 2 |
| Number of power contacts | 4 |
| PE contact | Yes |

Technical characteristics

| | |
|--------------------------|-------------------------|
| Conductor cross-section | 4 ... 6 mm ² |
| Rated current | 40 A |
| Rated voltage | 500 V |
| Rated impulse voltage | 6 kV |
| Pollution degree | 3 |
| Rated voltage acc. to UL | 600 V |
| Insulation resistance | >10 ¹⁰ Ω |
| Limiting temperature | -25 ... +85 °C |



Pushing Performance
Since 1945

Technical characteristics

| | |
|--|------|
| Mating cycles | ≥500 |
| Degree of protection acc. to IEC 60529 | IP65 |

Material properties

| | |
|---|----------------------|
| Material (hood/housing) | Polycarbonate (PC) |
| Colour (hood/housing) | RAL 9005 (jet black) |
| Material (seal) | NBR |
| Material flammability class acc. to UL 94 | V-0 |

Specifications and approvals

| | |
|----------------|--------------------------|
| Specifications | IEC 60664-1 IEC 61984 |
|----------------|--------------------------|

Commercial data

| | |
|--------------------------------|-----------------------------------|
| Packaging size | 1 |
| Country of origin | Germany |
| European customs tariff number | 85366990 |
| eCl@ss | 27142409 Small distribution board |