


Relay, 1 changeover contact, hard gold-plated, 60 V DC, can be used with 115/230 V AC/DC, complete unit

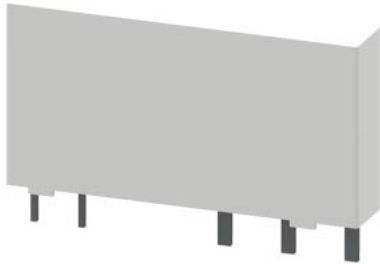

protection class IP	IP00
Substance Prohibittance (Date)	07/01/2006
operational current of auxiliary contacts at DC-13 at 230 V	0.1 A
ambient temperature during operation	-25 ... +55 °C

### Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3TX7014-7BP02>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3TX7014-7BP02>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3TX7014-7BP02>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3TX7014-7BP02&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3TX7014-7BP02&lang=en)

Characteristic: Derating

<https://support.industry.siemens.com/cs/ww/en/ps/3TX7014-7BP02/manual>

last modified:

1/18/2021 