

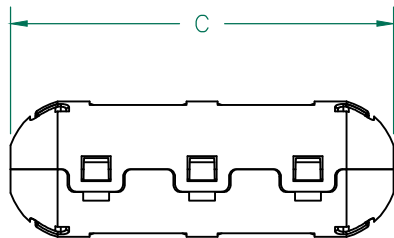


CORE DIMENSIONS

A	15.00 [.591]	+ 0.23 [.009]	-
B	6.55 [.258]	+ 0.10 [.004]	-
C	39.78 [1.566]	+ 0.51 [.020]	-
D	7.16 [.282]	+ 0.15 [.006]	-

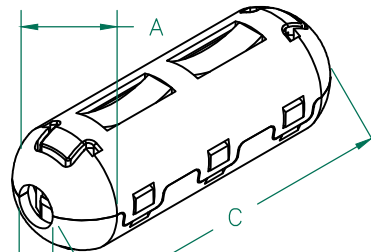


CASE DIMENSIONS:

A	18.75 [.738]	+ REF.	-
B	6.75 [.266]	+ REF.	-
C	52.91 [2.083]	+ REF.	-
D	18.75 [.738]	+ REF.	-
E	3.24 [.128]	+ REF.	-

IMPEDANCE (Z)			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	186 Ω	407 Ω	575 Ω
Minimum	- Ω	326 Ω	- Ω

Z vs. FREQUENCY (REF. ONLY)

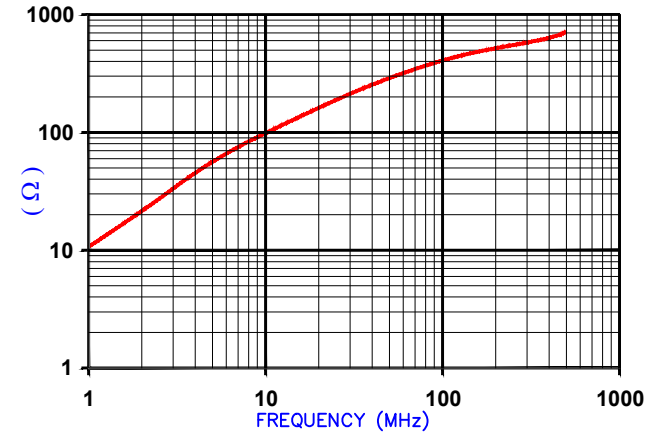

AGILENT E4991A Impedance/Material Analyzer
HP 16092A-Test Fixture. TEST REF. 4095

NOTES:

1. ASSEMBLED PART #: 28A0593-0A2
2. CASE COLOR: BLACK-0A2.
3. CASE FLAMMABILITY RATING: UL94 V-2.
4. CASE MATERIAL: Halogen Free Nylon

DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.				
H	UPDATED NOTE 3	09/15/10	JUN	PROJECT/PART NUMBER:		REV	PART TYPE:	DRAWN BY:
G	ADD NOTES 3 AND 4	01/27/09	JRK	28A0593-0A2		H	FERRITE SNAP-ON	TMB
F	ADD MISSING DIM CALLOUTS "D & E" TO CASE UPDATE COMPANY LOGO	05/07/08	TMB	DATE:		SCALE:	MATERIAL:	
E	UPDATE 100MHz MINIMUM VALUE UPDATE COMPANY LOGO TOLERANCES TO REF VIEWS UPDATE NOTES	06/26/07	TMB	04/28/04		N.T.S.	Ferrite	
D	REV CASE DIM C TO MATCH CASE PRINT	01/11/07	TMB	CAD #		TOOL #		
REV	DESCRIPTION	DATE	INT	28A0593-0A2-H		-		