


- Dual Port 10/100/1000 Mbps adapter
- PCI Express (PCIe) v2.1 (2.5 GT/s & 5.0 GT/s) x4 lanes, also compatible with x8 and x16
- Dual Port PoE+ output power consumption up to 30 W per port
- PCI Express (PCIe) +12 V Power Supply
- Powered Device (PD) auto detection and classification per PoE+ port
- Selected RJ45 connector with thickened gold for reliable connection
- Special screw lock to ensure stable connection
- Low Profile and full-Height bracket
- Integrated heat sink

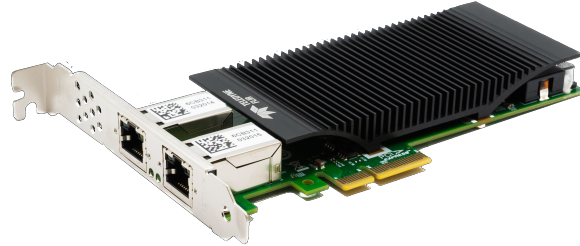

General Specifications	ACC-01-1105
Controller	Intel® I350 Gigabit Ethernet Controller
Cable Types	Cat 5E and Cat6: 1000 Base-T or 100 Base-T up to 100 m (PoE power minimum requirement Cat5)
TDP (maximum)	3 W
Connector	2 x 1 GigE 8-pin locking RJ45 interface
PCIe Bus Type	PCI Express v2.1 (2.5 GT/s & 5.0 GT/s) x4 Also compatible with x8 or x16 lanes
Transfer Rate	10/100/1000 Mbps
Ports	Dual 1 Gigabit Ethernet
Power	Dual port PoE up to 30 W/port
Operating Temperature	0°C to 55°C
Dimensions	68.8 mm x 159.5 mm
Mass	148 g
Compliance	IEEE 802.3af, 802.3at

The ACC-01-1105 is compatible with all Teledyne FLIR machine vision GigE camera models.

## Teledyne FLIR

[www.teledyneflir.com](http://www.teledyneflir.com)

### CANADA

12051 Riverside Way  
 Richmond, BC, Canada  
 V6W 1K7  
 T: +1 866.765.0827 (toll free)  
 T: +1 604.242.9937  
 F: +1 604.242.9938  
 E: [mv-sales@flir.com](mailto:mv-sales@flir.com)  
[www.flir.com/mv](http://www.flir.com/mv)

### EUROPE

T: +49 7141 488817-0  
 F: +49 7141 488817-99  
 E: [mv-eusales@flir.com](mailto:mv-eusales@flir.com)

### CHINA

T: +86 10 8215 9938  
 F: +86 10 8215 9936  
 E: [mv-chinasales@flir.com](mailto:mv-chinasales@flir.com)

### USA

T: +1 866.765.0827 (toll free)  
 E: [mv-na-sales@flir.com](mailto:mv-na-sales@flir.com)

### ASIA

E: [mv-asiasales@flir.com](mailto:mv-asiasales@flir.com)

©2021 Teledyne FLIR LLC. All rights reserved. Names and marks appearing on the products herein are either registered trademarks or trademarks of Teledyne FLIR LLC and/or its subsidiaries. Specifications are subject to change without notice.