



SPECIFICATIONS:

- MATERIAL:-
 △ HOUSING: PBT, UL94V-0
 TERMINAL: PHOSPHOR BRONZE
 FINISH:-
 △ PIN 1: Au PLATED
 PIN 2~7: SILVER PLATED
 ELECTRICAL:-
 CURRENT RATING: 1 AMP. MAX.
 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC RMS FOR 60 SECS
 CONTACT RESISTANCE: 30 mΩ MAX.
 INSULATION RESISTANCE: 100 MΩ MIN AT 500V DC
 ENVIRONMENTAL:-
 OPERATING TEMPERATURE: -25°C ~ +70°C △

NOTES: ALL DIMENSIONS AND NOTES MARKED \times ARE CRITICAL AND MUST BE CHECKED IN ACCORDANCE WITH QUALITY DOC. QI-02A

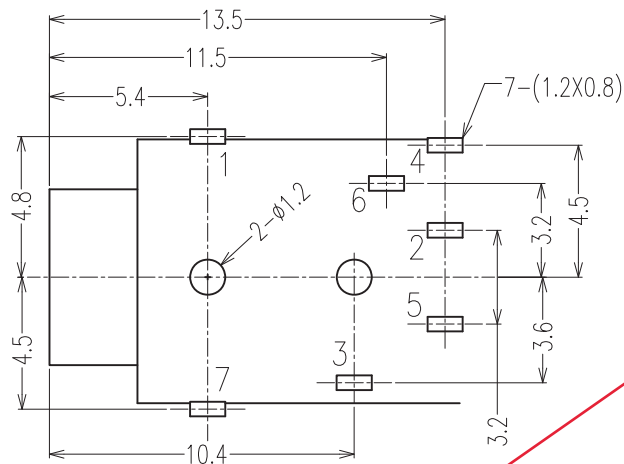

PCB LAYOUT (TOP VIEW)

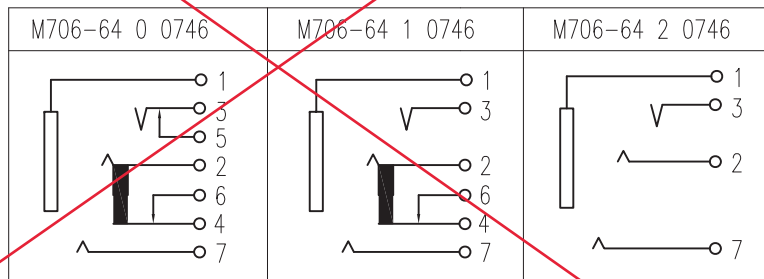

Allan	3	06.10.10	A328
Allan	2	05.10.09	A241
Allan	1	01.08.06	-

NAME	ISS.	DATE	C/NOTE
------	------	------	--------

APPROVED: *[Signature]*

CHECKED:

DRAWN: Allan

CUSTOMER REF.:

ASSEMBLY DRG:

ORDER CODE
M706-64 X 0746
 REFER SCHEMATIC

OBSOLETE

TOLERANCES
 X.X = ± 0.20 mm
 X.XX = ± 0.10 mm

HARWIN

HARWIN USA TEL: 603 893 5376 FAX: 603 893 5396 mis@harwin.com	HARWIN Europe (UK) TEL: 023 9231 4545 FAX: 023 9231 4590 mis@harwin.co.uk	HARWIN Asia TEL: +65 6 779 4909 FAX: +65 6 779 3868 mis@harwin.com.sg
--	--	--

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES
 X. = ± 1 mm
 X.X = ± 0.25 mm
 X.XX = ± 0.10 mm
 X.XXX = ± 0.01 mm
 ANGLES = $\pm 5^\circ$
 UNLESS STATED

MATERIAL: SEE NOTES
 FINISH: SEE NOTES
 S/AREA: mm²

TITLE:
 3.5mm EARPHONE JACK, PCB MOUNT
 PLASTIC HOUSING WITHOUT BUSHING
 DRAWING NUMBER:
M706-64 X 0746
 SHT 1 OF 1