

# SBB136 Proto Advantage


Datasheet revision 1.1

[www.Proto-Advantage.com](http://www.Proto-Advantage.com)

## 136 pts solder-in breadboard (Exact Solderless Match)



Top view

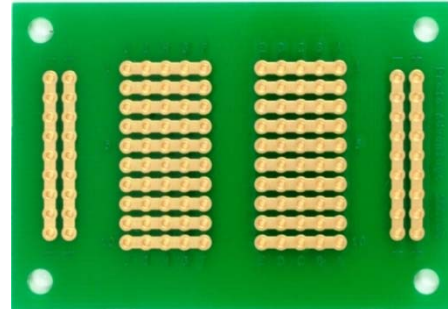

Bottom view

### Product Highlights

#### Immersion Gold Finish

All holes are gold plated and are on a 0.1" grid. Column E-F hole-center to hole-center spacing is 0.3" (7.62mm).

1/16" (1.6mm) thick FR-4 UL94V-0

Accepts a variety of wire sizes (20-32 AWG)

4 mounting holes

Two rectangular silkscreen areas that you can write on using pencil or pen

### Usage

This board exactly copies the routing of a 136 pts 1/6 size solderless breadboard.

Allows direct transfer of circuits prototyped in a solderless breadboard to a solder-in breadboard to facilitate functional in-system testing or field testing.

### Specifications

#### Wiring Pattern:

2 Distribution Strips  
1 Terminal Strip  
36 Distribution Holes  
100 Terminal Holes

#### Dimensions:

1.6" x 2.3" x 0.0625" (40.64mm x 58.42mm x 1.6mm)

#### PCB construction:

FR-4 UL94V-0

#### PCB operating temperature range:

-40°C to +130°C (-40°F to +266°F)

#### PCB reflow maximum temperature:

+260°C (500°F)

#### PCB trace width:

0.059" (1.5mm)

#### PCB trace thickness:

1 oz copper / ft<sup>2</sup> (1.4 mils) (0.03556 mm)

#### PCB trace current capacity\*:

10A continuous @ 40°C rise, 13A continuous @ 80°C rise\*

#### Recommended pin size:

25 mil square wire wrap posts or smaller


#### Diameter of 4 corner mounting holes:

3.2mm (125 mils)

\* Derived from IPC-2221 current capacity graphs at 25°C ambient temperature. Actual current capacity will vary based on air flow, component density, and other factors.

Top View of SBB136


Topside silkscreen lines between holes show where bottom traces electrically connect holes.

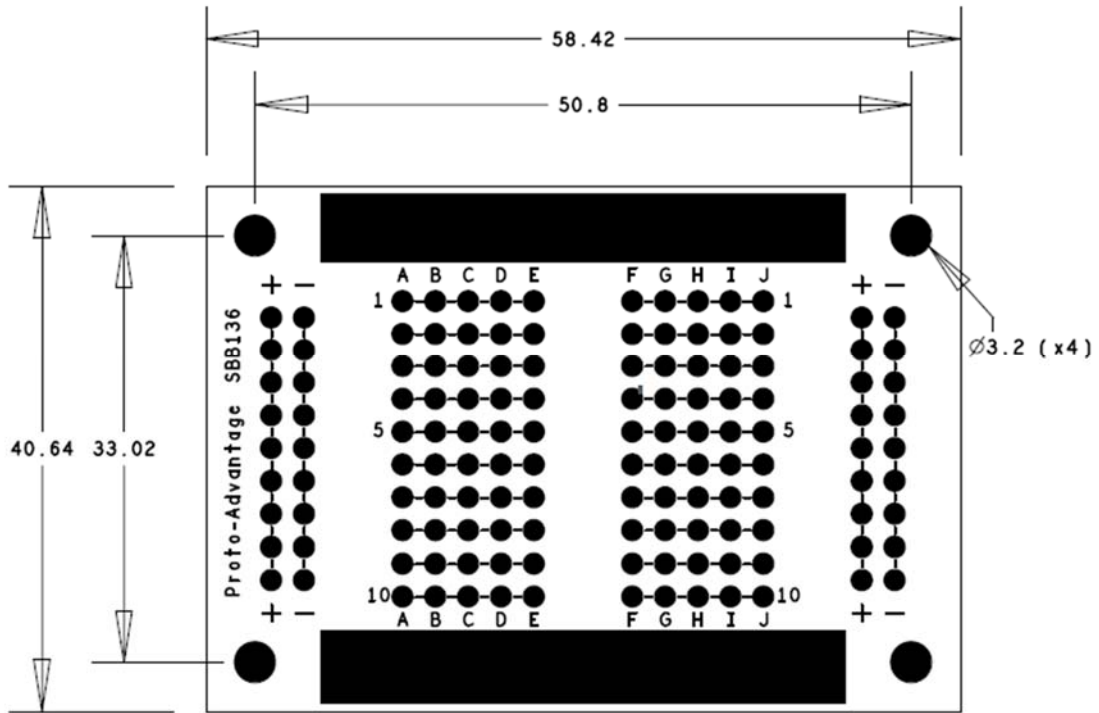


(Representative drawing only - not to scale)

# Complete Line of Proto Advantage Exact Solderless Match Solder-in Breadboards:


Tiny breadboard match (P/N: **SBB170**)

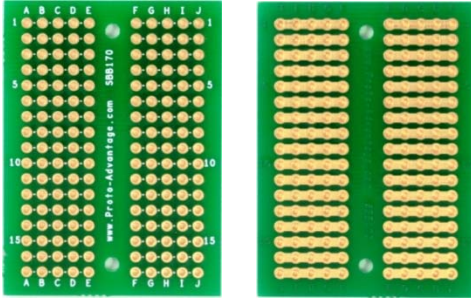


Full size breadboard match (P/N: **SBB830**)

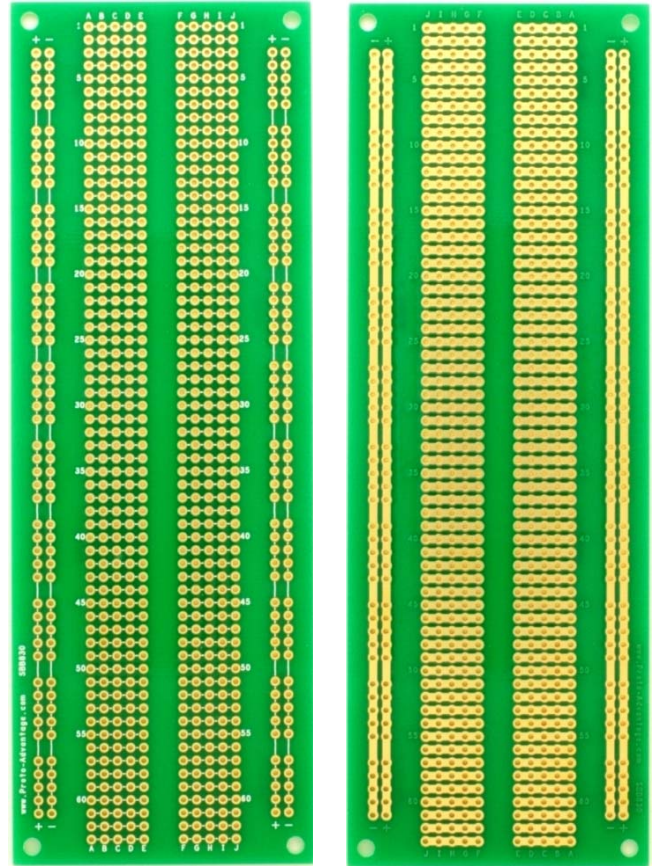

1/6 size breadboard match (P/N: **SBB136**)

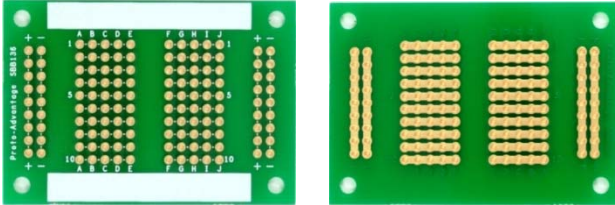

1/4 size breadboard match (P/N: **SBB206**)

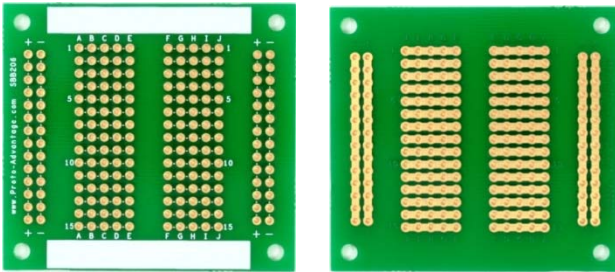

1/2 size breadboard match (P/N: **SBB400**)

