


** Not all features are shown in this drawing. For more detailed information, please contact your Fair-Rite representative.

UNCONTROLLED ~CATALOG~ DRAWING

SIZE	PART NO.	REV.
B	5976000221	~

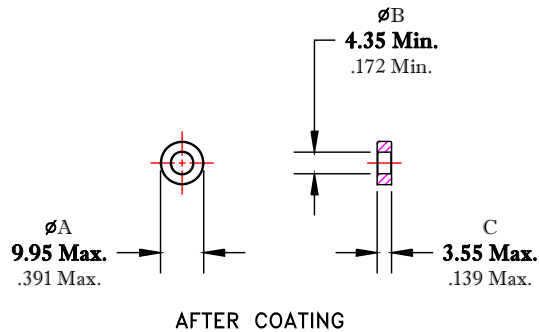


DIMENSIONS
BOLD NUMBERS ARE IN MILLIMETERS
 LIGHT NUMBERS ARE IN INCHES

ELECTRICAL SPECIFICATIONS					
$\Sigma l/A(\text{mm}^{-1})$	l_e (mm)	A_e (mm ²)	V_e (mm ²)	L_o (nH)	A_L (nH) @10kHz <10gauss
2.8550	20.7	7.25	150	0.440	4400 $\begin{smallmatrix} +30\% \\ -35\% \end{smallmatrix}$

NOTES:

- 1 - THIS PART TO BE SUPPLIED WITH A UNIFORM COATING OF POLYESTER. USE APPROVED FR# 5976000201.
- 2 - COATING THICKNESS = 0.125mm (.005") Max.
- 3 - COATED TOROID TO WITHSTAND A MINIMUM BREAKDOWN VOLTAGE OF 1000 Vrms, WHEN UNIFORMLY APPLIED ACROSS THE "C" DIMENSION.

FR# 76

 FAIR-RITE PRODUCTS CORP.					
TITLE COATED TOROID					
DRAWN BY J.SERENCIS	DATE 07-17-2018	SIZE	PART NO.	REV.	
CHKD BY		B	5976000221	~	
APPRVD BY		SCALE	NONE	SHEET 1 of 1	