

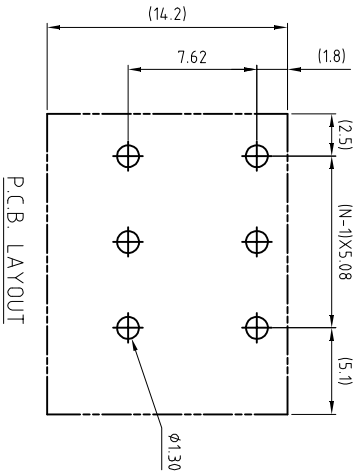


Material
Terminal body(Contact pin):Brass
Wire guard: Stainless steel
Surface of solder tail: Tin plated
Insulator(housing): Thermoplastic (UL94V-0), GREEN(RAL6018/T)

Electrical cULus/VDE
Voltage rating: 300VAC/250VAC
Current rating: 10A/10A
Wire range:0.75-1.5mm²
Solid wire(AWG): 14-24
Stranded wire(AWG): 14-24
Wire strip length: 9-10mm
Withstanding Voltage: 1.6kV/2kV
Operating temperature: -40°C to +115°C
Soldering temperature: 250°C±10°C/5 Sec
Safety Approval: cULus  



Poles	Tolerance	
	DIM L	DIM P
2p-6p	±0.20	±0.20
7p-12p	±0.25	±0.25
13p-24p	±0.40	±0.40

RoHS compliant
Unit: mm



Scale	Free TOLERANCE	Free TOL	Id.	Modification	Date	Name
X.	±0.50				10.12.2009	Dean
X.X	±0.30				15.03.2016	Winnie
X.XX	±0.10				17.04.2013	Amy
DIM	TOL					
X.°	±1°					
Angle	TOL					

ASSMANN
WSW/ components

Customer-No.
ASSMANN WSW-No.
A-TB508-HAXXH

Drawing-No.
ASS 3894 CO
Replace
rev03
Sheet

1	2	3	4	5	6	7
H	G	F	E	D	C	B