
## Data sheet 3726.8 ZQI 4/8 YE



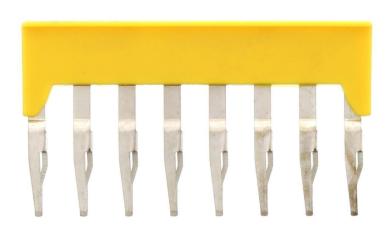

Insulated cross-connector, No. of poles: 8, Mounting type: Plug in, Width: 46.7 mm, Rated cross-section: 4 mm², Colour: Yellow

**RAL:** 1026

### **Business data**

Dusiness data	
Article number	<u>3726.8</u>
Article name	ZQI 4/8 YE
GTIN (EAN)	4044211060442
Packaging unit	10
Quantity unit	PC
Weight per piece (not including packaging)	5.83 g
Weight per piece (including packaging)	5.92 g
Unit of weight	G
Customs number	85389099
Country of origin	CZ
Prio-Article	3726.8
Product description	Insulated cross-connector

# **Data sheet**





Technical dataDimensions4.5 mmLength4.5 mmWidth46.7 mmPitch size6 mmRatings800 VVoltage with partition, max.800 VVoltage without partition, max.800 VRated current32 ARated cross-section4 mm²	
Length 4.5 mm  Width 46.7 mm  Pitch size 6 mm  Ratings  Voltage with partition, max. 800 V  Voltage without partition, max. 800 V  Rated current 32 A	
Width 46.7 mm  Pitch size 6 mm  Ratings  Voltage with partition, max. 800 V  Voltage without partition, max. 800 V  Rated current 32 A	
Pitch size 6 mm  Ratings  Voltage with partition, max. 800 V  Voltage without partition, max. 800 V  Rated current 32 A	
RatingsVoltage with partition, max.800 VVoltage without partition, max.800 VRated current32 A	
Voltage with partition, max.800 VVoltage without partition, max.800 VRated current32 A	
Voltage without partition, max.  Rated current  32 A	
Rated current 32 A	
Rated cross-section 4 mm <sup>2</sup>	
Contamination degree 3	
Connection data	
No. of poles 8	
Materials	
Material Copper alloy	
Surface Tin-plated	
Insulation housing Polyamide 6.6	
Flammability class UL 94 V-2	
Working temperature, min40 °C	
Working temperature, max. 105 °C	
Further technical data	
Mounting type Plug in	
Insulation available   ✓	
Touch protection is available   ✓	
Number of bridged terminals 8	
Environmental Product Compliance	
REACH Conform yes	
REACH Candidate Substance Note No	
RoHS Conform yes	

## Data sheet 3726.8 ZQI 4/8 YE



Media

## Data sheet

### 3726.8 ZQI 4/8 YE



### **Accessories**

#### ##INVERSE##CONTA-CONNECT



Feed-through terminal, Tension-spring connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 4 mm<sup>2</sup>, Width: 6.1 mm, Colour: Beige

Article number	Article name	GTIN (EAN)	Packaging unit
<u>3515.2</u>	ZRK 4/2A BG	4044211151751	100



Ex feed-through terminal ATEX-certified, Tension-spring connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 4 mm², Width: 6.1 mm, Colour: Beige

Article number	Article name	GTIN (EAN)	Packaging unit
1716.2	ZRK 4/2A Ex BG	4044211058579	100



Ex feed-through terminal ATEX-certified, Tension-spring connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 4 mm², Width: 6.1 mm, Colour: Beige

Article number	Article name	GTIN (EAN)	Packaging unit
<u>1717.2</u>	ZRK 4/3A Ex BG	4044211058609	100



Feed-through terminal, Tension-spring connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 4 mm², Width: 6.1 mm, Colour: Beige

Article number	Article name	GTIN (EAN)	Packaging unit
<u>3516.2</u>	ZRK 4/3A BG	4044211151775	100



Ex feed-through terminal ATEX-certified, Tension-spring connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 4 mm², Width: 6.1 mm, Colour: Beige

Article number	Article name	GTIN (EAN)	Packaging unit
1718.2	ZRK 4/4A Ex BG	4044211058630	100



Feed-through terminal, Tension-spring connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 4 mm², Width: 6.1 mm, Colour: Beige

Article number	Article name	GTIN (EAN)	Packaging unit
3517.2	ZRK 4/4A BG	4044211151782	100