
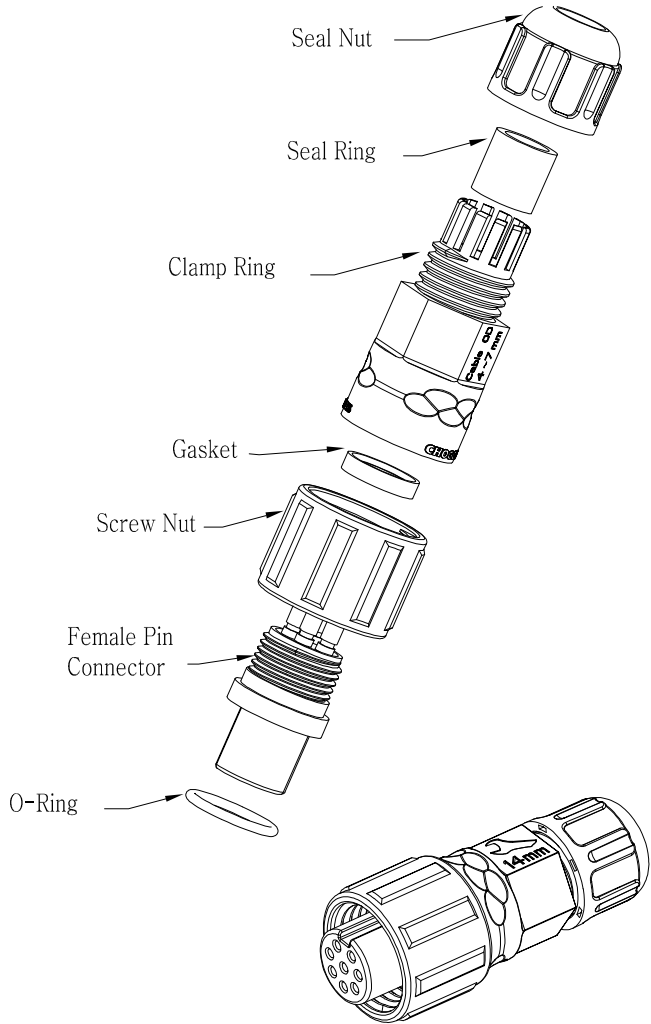

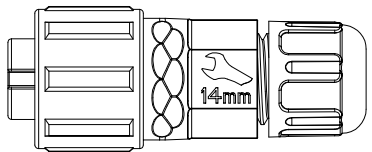


REV.	ECN NO.	DESCRIPTION	SIGN	DATE
C1	N/A	INITIAL DRAWING	Yumer	2020/04/16

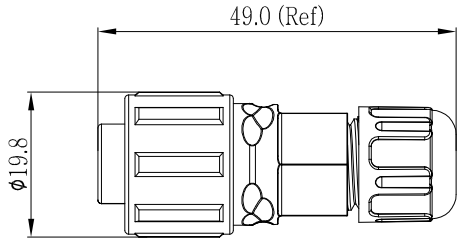

- Specification:
- 1.Operation Temperature:-45°C~105°C.
  - 2.Insulation Resistance:100MΩ at DC500V.
  - 3.Contact Resistance:<10mΩ.
  - 4.Withstand Voltage: 1300V AC
  - 5.Operating Current:5A
  - 6.Operating Voltage:AC 60V
  - 7.Waterproof Rate:IP67 (Mated)
  - 8.Seal Nut:Nylon, Black
  - 9.Seal Ring:Silicon, Black.
  - 10.Clamp Ring:Nylon, Black
  - 11.Gasket:Silicon, Red
  - 12.Screw Nut:Nylon, Black
  - 13.Female Pin:Copper Alloy, Gold Plated
  - 14.Connector:Nylon+ GF, Black
  - 15.O-Ring:Silicon, Red
  - 16.RoHS Compliant.
  - 17.UL Compliant.
  - 18.Cable Range OD:φ3.5mm~φ6.8mm
  - 19.Mating Cap:806-00032-00

22XXX211-01  
Pin Number

5 Pin	6 Pin	8 Pin
P/N: 22005211-01	P/N: 22006211-01	P/N: 22008211-01

Pin Assignments Front View

UNIT:mm		DESCRIPTION
Standard Series Screw Male Plug With Female Pin		
TOLERANCE	SCALE: 1:1	SHEET 1 OF 1
.X ±0.25	REV. C1	SIZE A4
.XX ±0.15	* :Inspection Item	
.XXX ±0.05		
ANGLES ±1°		



PART NO	22XXX211-01	DRAWN BY	Yumer	DATE	2020/04/16
DWG NO		CHECKED BY	Ivan	DATE	2020/04/16
CUSTOMER		APPROVED BY	Panson	DATE	2020/04/16

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN CHOGORI PERSONNEL WITHOUT AUTHORIZATION FROM CHOGORI CORP.