



### Electrical Specifications

**Center Frequency:** 800 MHz  
**-3dB Bandwidth:** 32 MHz Min  
**Passband:** 784-816 MHz  
**Insertion Loss at Fo:** 3.0 dB Max  
**VSWR in Fo:** 1.50:1 Max  
**Attenuation:** >65 dBc @ 600 MHz  
                   >52 dBc @ 1000 MHz  
**Input Power:** 1 Watt  
**Impedance:** 50 Ω


### Mechanical

**Mounting Method:** SMT  
**Dimensions:** 13 x 12 x 9 mm

### Environmental

**Operating Temperature:** -40 to +85° C  
**Storage Temperature:** -50 to +95° C

### Outline Drawing:

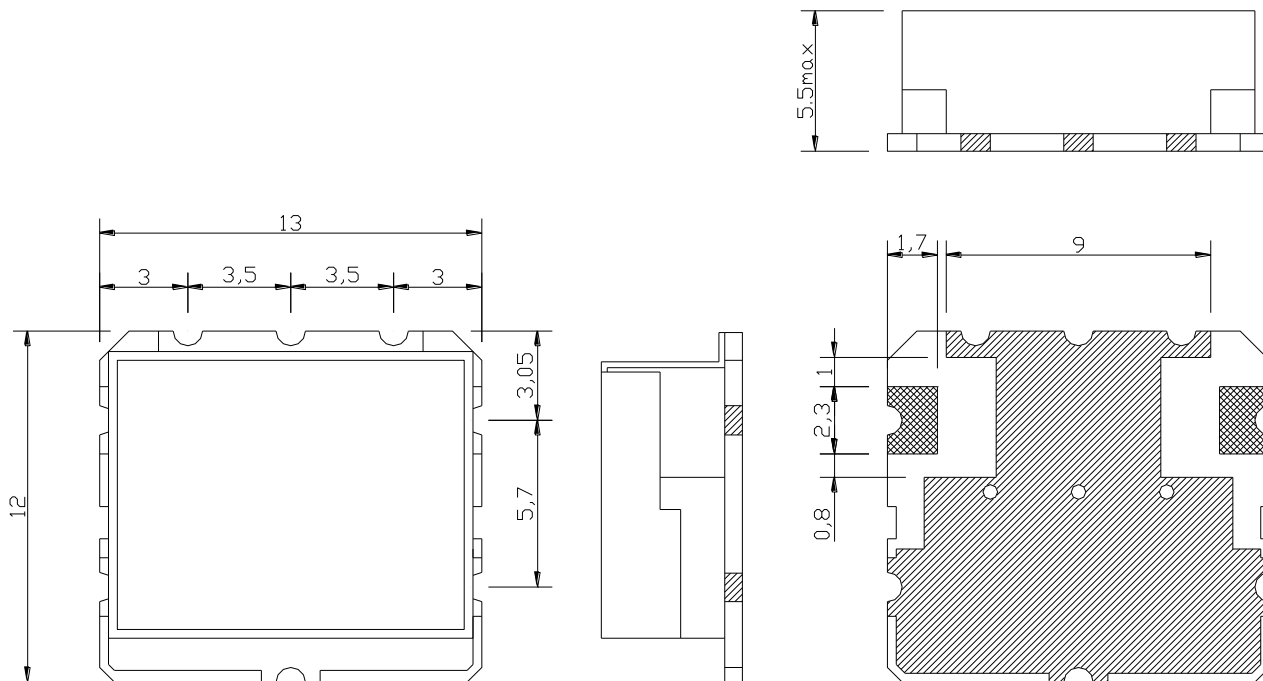

UNIT:mm

TOLERANCE:±0.3