

# Data sheet

## 16002.2 CP V 40-1



Overvoltage arrester type 2, Consisting of base element and protective plug with high-performance varistor, Mounting type: Mounting rail TS 35, 1-channel, Rated voltage: 230 VAC

### Business data

Article number	<u>16002.2</u>
Article name	CP V 40-1
GTIN (EAN)	4044211144494
Packaging unit	1
Quantity unit	PC
Weight per piece (not including packaging)	102.6 g
Weight per piece (including packaging)	113.9 g
Unit of weight	G
Customs number	85354000
Country of origin	CN
Product description	Overvoltage arresters

### Technical data

#### Dimensions

Length	90 mm
Width	18 mm
Height	70 mm
Installation dimensions acc. to DIN 43880	1 Te

#### Ratings

Rated voltage $U_n$	230 / 400 -
Rated discharge surge current $I_n$ (8/20) $\mu$ s	20 kA
Rated frequency min.	50 Hz
Rated frequency max.	60 Hz
Short-circuit resistance $I_p$	25 kA

#### Connection data

Connection principle	Screw connection
Wire cross-section single core (rigid), min.	4 mm <sup>2</sup>
Wire cross-section single-core (rigid), max.	25 mm <sup>2</sup>
Wire cross-section stranded, min.	4 mm <sup>2</sup>
Wire cross-section stranded, max.	25 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, min.	25 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, max.	4 mm <sup>2</sup>

#### Materials

Insulation housing	Thermoplastic
Flammability class UL 94	V-0
Working temperature, min.	-40 °C
Working temperature, max.	85 °C

### Technical data

#### Further technical data

Protection class	IP20
Response time $t_A$	<25 ns
Max. continuous voltage $U_c$	280 V
Discharge current $I_{max}$ (8/20) $\mu s$ , max.	40 kA
Protection level $U_p$	<1,25 kV
Residual voltage $U_{res}$ (5 kA)	<0,5 kV
Operating current $I_c$	<1 mA
Follow-on current $I_f$	None
Follow-on current extinguishing capacity $I_{fi}$	Infinite
TOV voltage $U_t$ (L-N)	340 V / 5 s
Series fuse, max.	125 gL A
Malfunction display	Mechanical, red
Type of mains network	TNC, TNS

#### Environmental Product Compliance

REACH Conform	yes
REACH Reference date	2023-01-17
REACH Candidate Substance Note	No
RoHS Conform	yes

---

### Approvals

---



#### Standards and regulations

---

DIN EN 61643-11 (Germany)	Arrester type 2
EN 61643-11 (Europe)	Low voltage SPD - Class II test
IEC 61643-1 (International)	Low voltage SPD - Class II test
UL1449 ed.2 (USA)	Low voltage TVSS

---

### Media

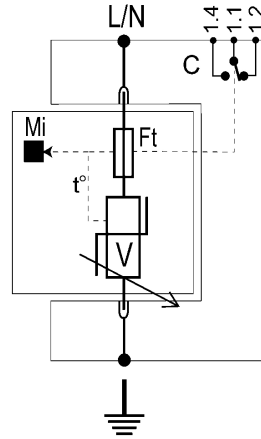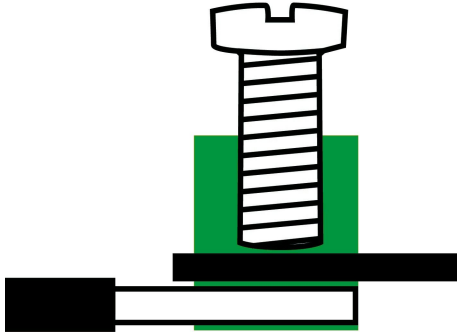

---

### Accessories

---