




Dimensions : mm / [inches]

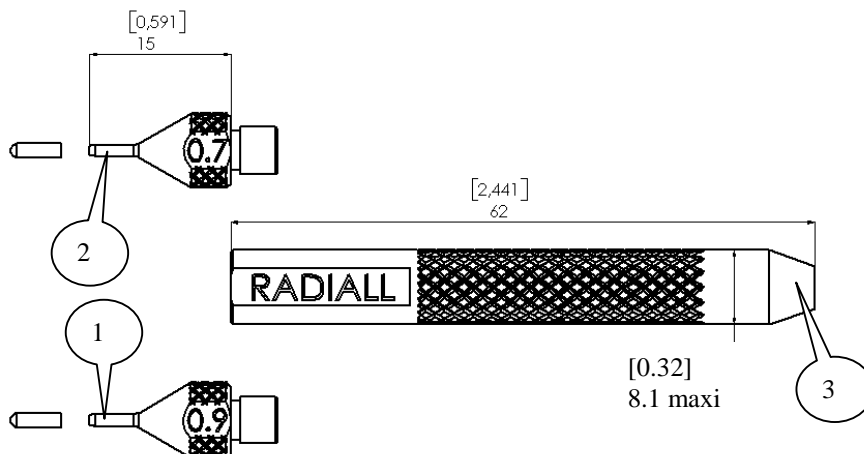

GENERAL

- Compatible with LC, SC and FC connectors.
- Suitable for use with cable sizes Ø 1.5 mm to 3.2 mm.
- Stainless steel.


CHARACTERISTICS

FUNCTIONING


1. For 0.9 mm buffer coating: screw the part number 1 on the part number 3
and
For 0.6 or 0.7 mm buffer coating: screw the part number 2 on the part number 3.




2. Insert the part number 1 or 2 under the outer cable and under the reinforcing elements in aramid yarns.



3. Insert the inner sleeve inside the part number 3.



4. Insert, by growing with the tool, the inner sleeve under the outer cable and under the reinforcing elements in aramid yarns.

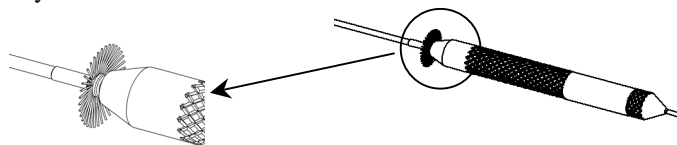

CREATION				RADIALL® 101, rue P. Hoffmann 93116 ROSNY/BOIS FRANCE Tel : (33) 0149353535 Fax : (33) 0148546363	
N°:					
EPF : 0001-1					
Name : P.B.					
Date : 06 19 02					
Appr : S.D.	Issue	Revisions	Name	Appr.	