


Steward

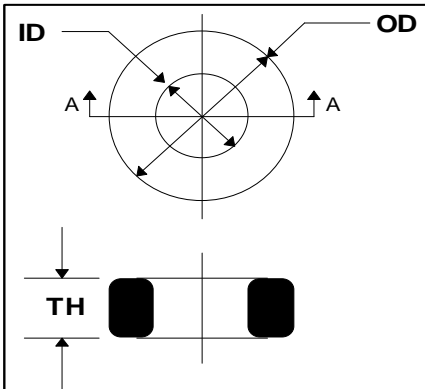

CORE DIMENSIONS					
UNCOATED CORE					35T0190-100
	MM	INCHES		MM	INCHES
OD	4.83	(.190)	±	.13	(.005)
ID	2.29	(.090)	±	.13	(.005)
TH	1.27	(.050)	±	.13	(.005)
SINGLE PARYLENE COATING					35T0190-10P
OD	4.85	(.191)	±	.13	(.005)
ID	2.26	(.089)	±	.13	(.005)
TH	1.30	(.051)	±	.13	(.005)

WEIGHT / K 0.19 LBS
 INITIAL PERMEABILITY 5000

ELECTRICAL SPECIFICATION								
	MIN	NOM	MAX	FREQ.	VOLT.			
	(μH)	MIN TOL.	(μH)	(μH)	(kHz)	(V)	TURN	URNS
L	.759	(-20%)	.949	1.139	100	≤ .00034	1	1
Q	10	-	-	-	100	≤ .00034	1	1

COATING SPECIFICATIONS				
	TYPE	Max. Coating (mils.)	Min. DLB VAC	TEST FORCE (LB)
	PARYLENE	0.5	1000	0.22

NOTES:



Rev	Description	Date	INT
A	Original Draft	6/9/1995	JBE
B	REVISED PRINT	6/9/1995	JBE
C	UPDATE TO NEW FORMAT	6/9/1995	JBE
D	TRANSFER TO LOTUS NOTES	11/19/1997	IS
E	REM Q SPECS REACTIVATE PRINT CHANGE PART NUMBER	10/5/2005	JRK
F	Revised Template	6/1/2006	WMM

Date: 6/1/2006	DWG # 35T0190-10P-F	Rev:
Drawn By: WMM	Title # 35T0190-10P	F

Steward This document contains information which is proprietary to Steward. No production or publication of this document in whole or in part shall be made without written authorization from Steward.

UNCONTROLLED DOCUMENT