

## SEK CAB FLAT SH RND AWG28/7 09P 100m

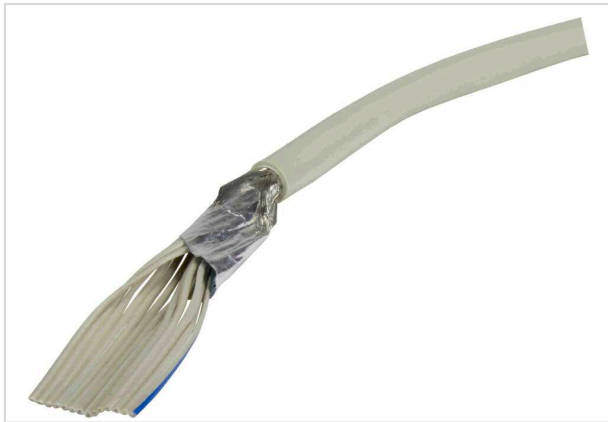


Image is for illustration purposes only. Please refer to product description.

|                    |   |
|--------------------|---|
| Part number        | 09 18 009 7010  |
| Specification      | SEK CAB FLAT SH RND AWG28/7 09P 100m  |
| HARTING eCatalogue | <a href="https://b2b.harting.com/09180097010">https://b2b.harting.com/09180097010</a> |

### Version

|                 |          |
|-----------------|----------|
| Cable length    | 100 m    |
| Number of cores | 9        |
| Core structure  | AWG 28/7 |
| Shielding       | Shielded |

### Technical characteristics

|                              |  |
|------------------------------|--|
| Impedance                    | 100 $\Omega$                                   |
| Limiting temperature         | -30 ... +75 °C unmoved<br>-20 ... +75 °C moved |
| Conductor resistance @ 20 °C | $\leq 216 \Omega/\text{km}$                    |

### Material properties

|                                      |               |
|--------------------------------------|---------------|
| Material (cable)                     | PVC           |
| Colour (cable)                       | Grey          |
| RoHS                                 | compliant     |
| ELV status                           | compliant     |
| China RoHS                           | e             |
| REACH Annex XVII substances          | Not contained |
| REACH ANNEX XIV substances           | Not contained |
| REACH SVHC substances                | Not contained |
| California Proposition 65 substances | Not contained |



**Pushing Performance**  
Since 1945

## Specifications and approvals

|                |                         |
|----------------|-------------------------|
| Specifications | UL 1581<br>UL PLCC, CL2 |
| CE             | Yes                     |

## Commercial data

|                |  |
|----------------|--|
| Packaging size | 1  |
| Net weight     | 55 g/m   |
| eCl@ss         | 27061801 Data and communication cable (copper) |