



### Electrical specifications

**Center Frequency:** 2475.5 MHz  
**Bandwidth:** 12 MHz  
**50 dB Bandwidth:**  
 30 MHz max (12 MHz passband)  
**Input / Output Impedance:** 50 Ohms  
**Passband Insertion Loss:** 2.5 dB max  
**Passband Ripple:** 0.5 dB max  
**Power Handling:** 10 Watts  
**VSWR (Input and Output):** 1.5:1


### Mechanical

**Mounting Method:** Threaded Mounting Holes  
**Connector Type:** SMA Female  
**Dimensions:** 10.07" x 1.5" x 0.76"

### Environmental

**Operating Temperature:** -45 to +85 deg.C  
**Storage Temperature:** -55 to +95 deg.C  
**Shock:** 20 G. 11ms  
**Vibration:** 20 G. 5 to 200 Hz

### Outline Drawing:

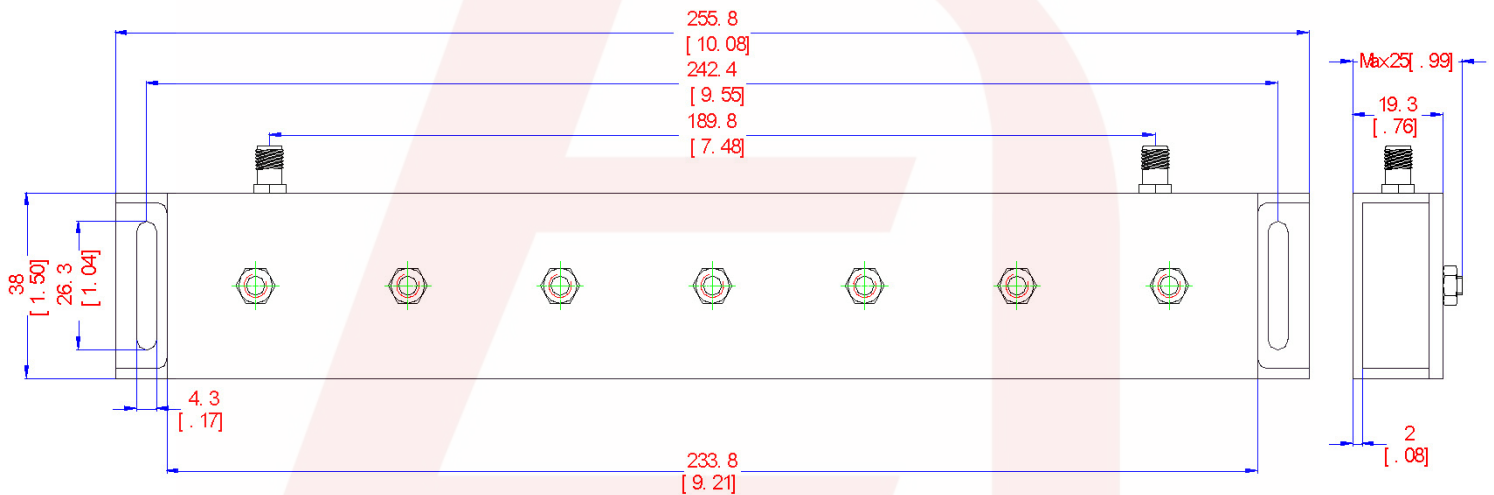




**ANATECH ELECTRONICS INC**  
RF & Microwave Filters & Products

# WiFi Cavity Bandpass Filter

Part Number: AB2475B632



## Response Plot:

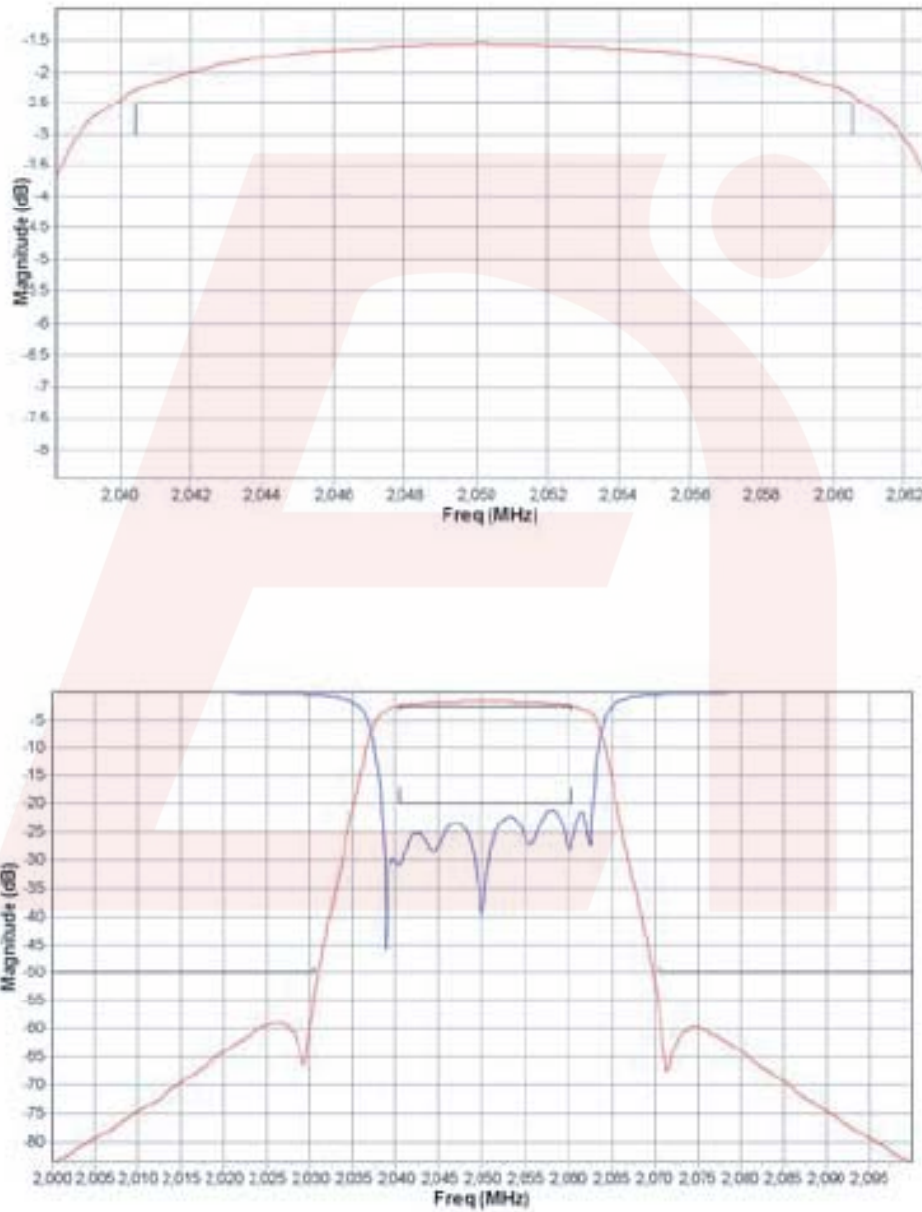

DS-B632-03152018-Rev0