



May.1.2023 Copyright 2023 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

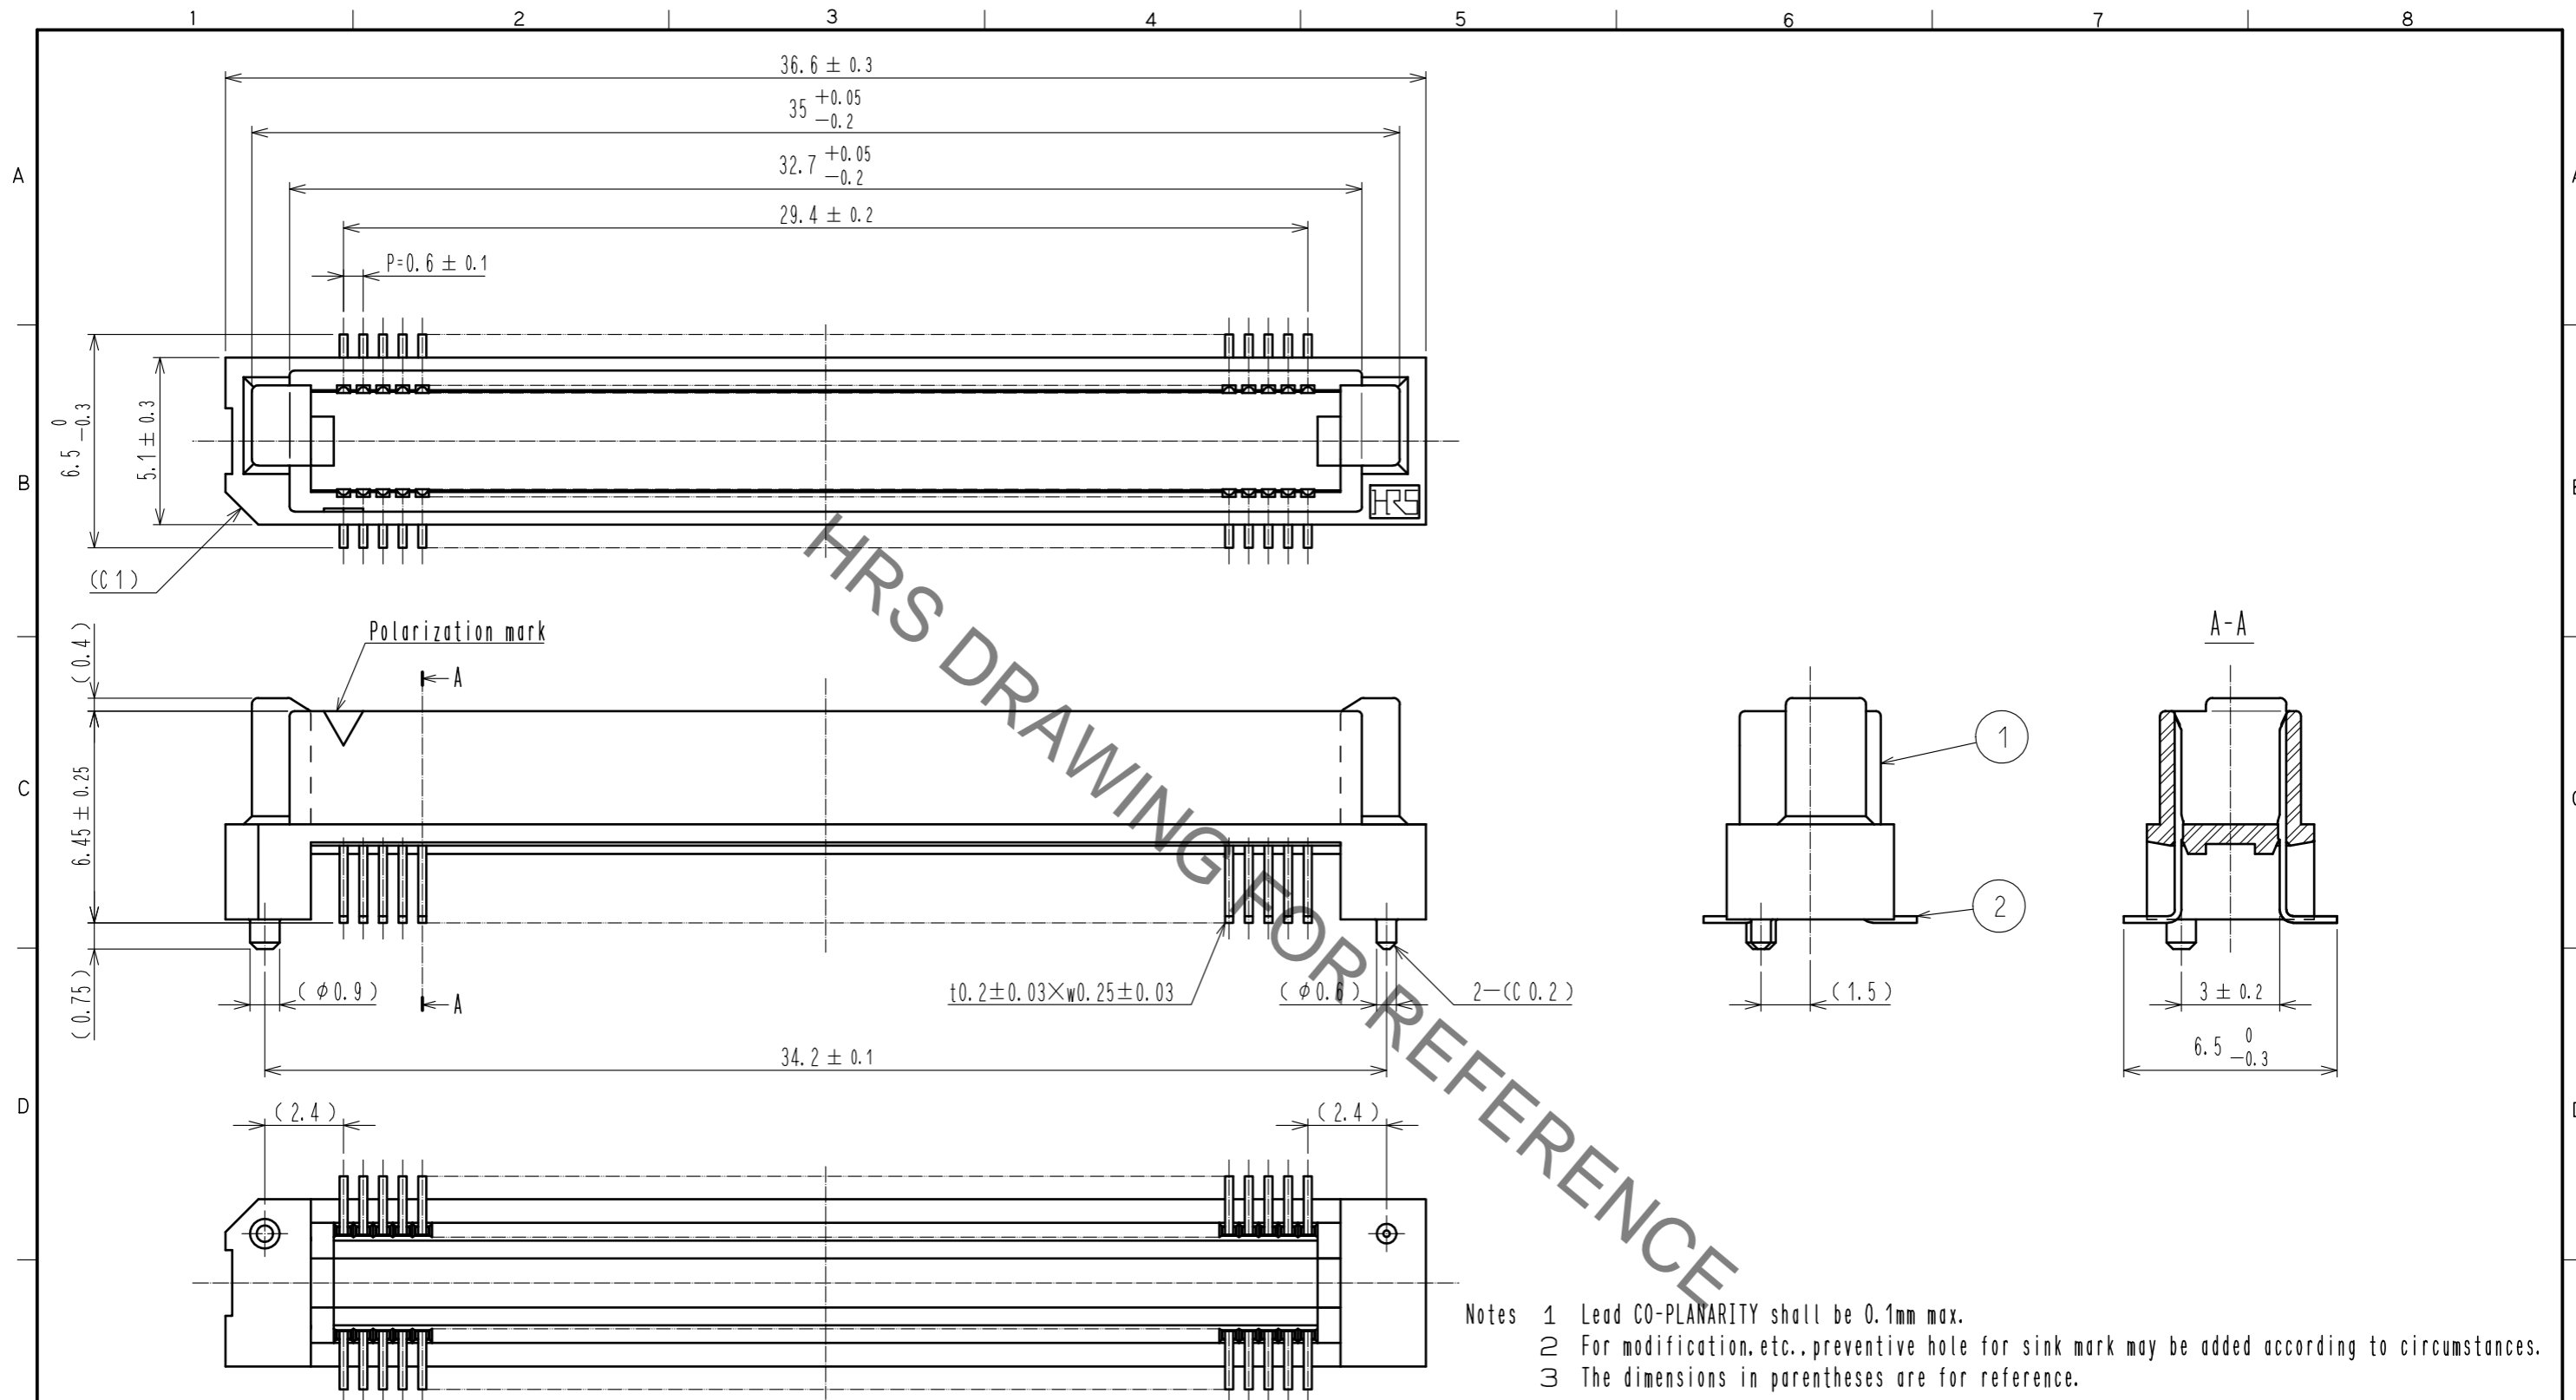

Notes

- 1 Lead CO-PLANARITY shall be 0.1mm max.
- 2 For modification, etc., preventive hole for sink mark may be added according to circumstances.
- 3 The dimensions in parentheses are for reference.

Recommended land pattern dimension of PCB (mounting side) (2:1)

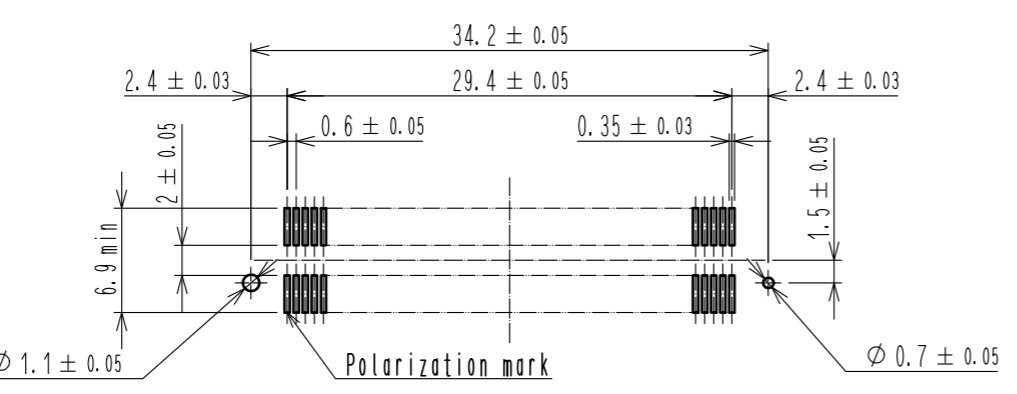


1 PPS		Light brown (UL94V-0)		2 PHOSPHOR BRONZE		Contact area : Gold 0.1 $\mu$ m min.	
NO. MATERIAL FINISH . REMARKS		NO. MATERIAL FINISH . REMARKS		Lead area : Tin-plating 1 $\mu$ m min.		Under plating : Nickel 1 $\mu$ m min.	
UNITS		SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm		5 : 1	1	DIS-F-00006415	KS. NAKAJIMA	HT. YAMAGUCHI	20200803
APPROVED : HS. OKAWA 20051117				DRAWING NO. EDC-150843-71-25			
CHECKED : HS. OZAWA 20051117				PART NO. FX8C-100P-SV2(71)			
DESIGNED : KY. NAKAMURA 20051117				CODE NO. CL578-0545-4-71			
DRAWN : KY. NAKAMURA 20051117				1/2			

May.1.2023 Copyright 2023 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


【 Precaution 】

When a board with multiple connectors mounted is mated, the connector may be damaged or deformed.  
Please divide one side of the board so only one connector is mated per board.

OK

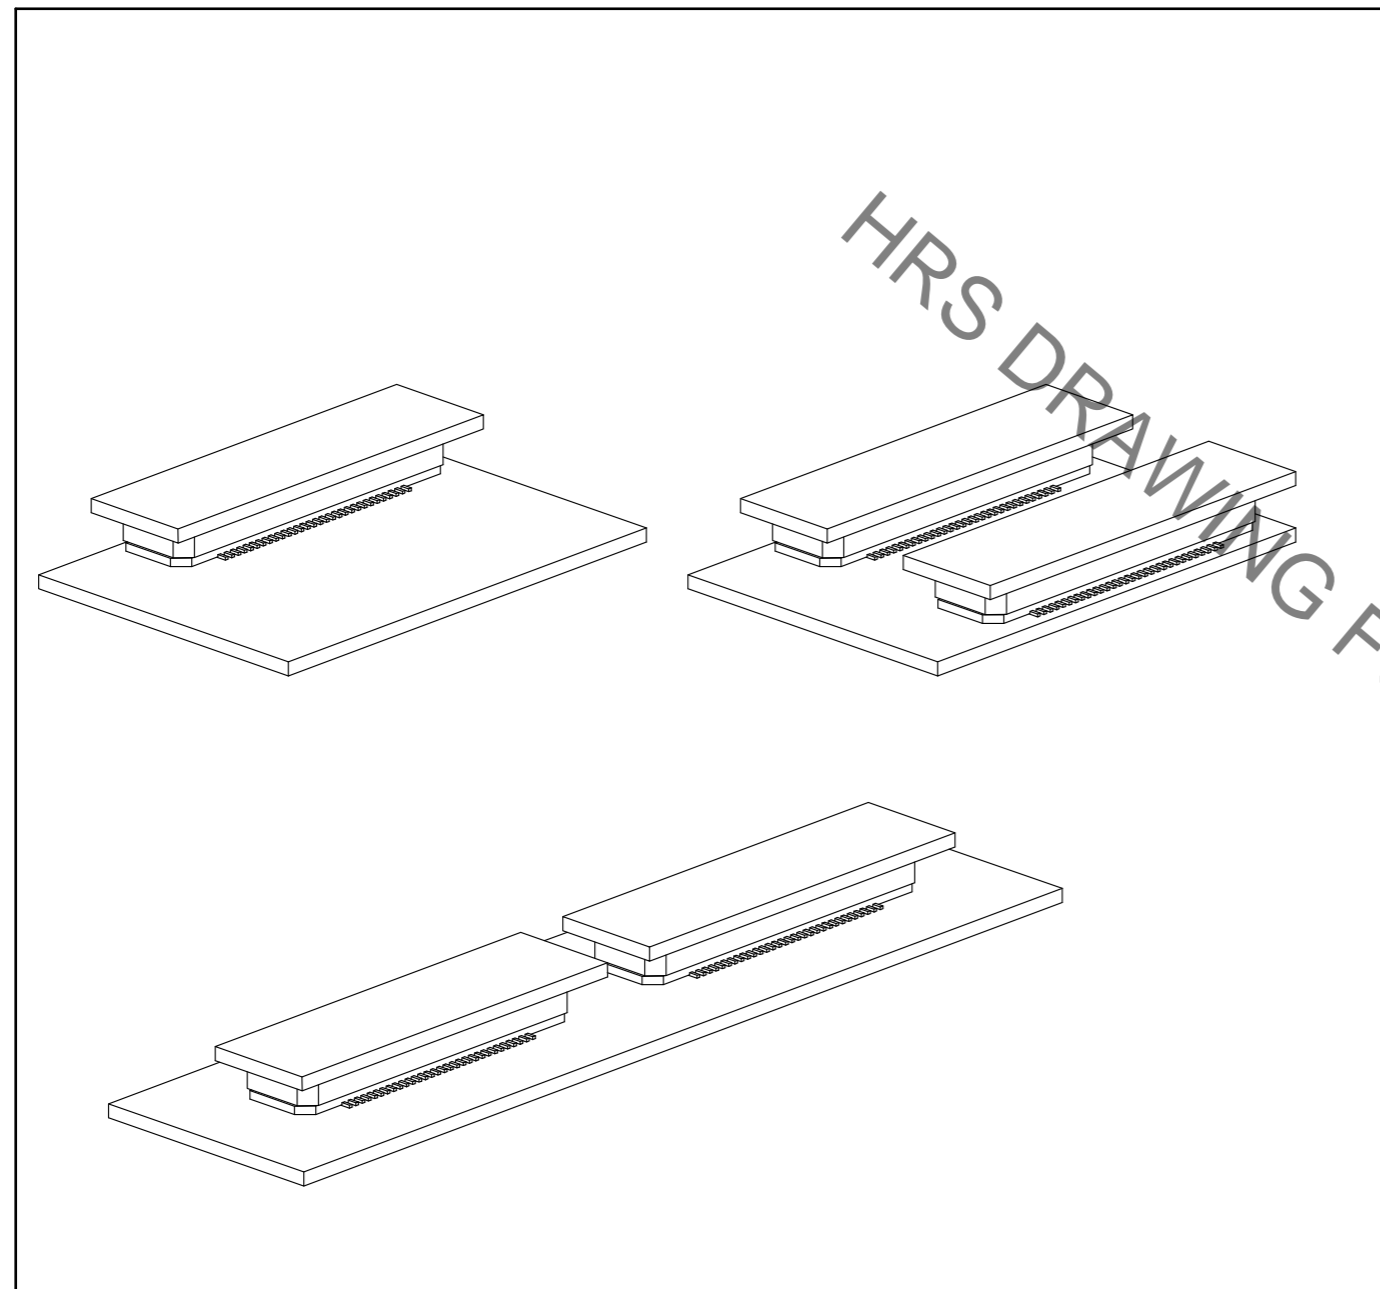

NG

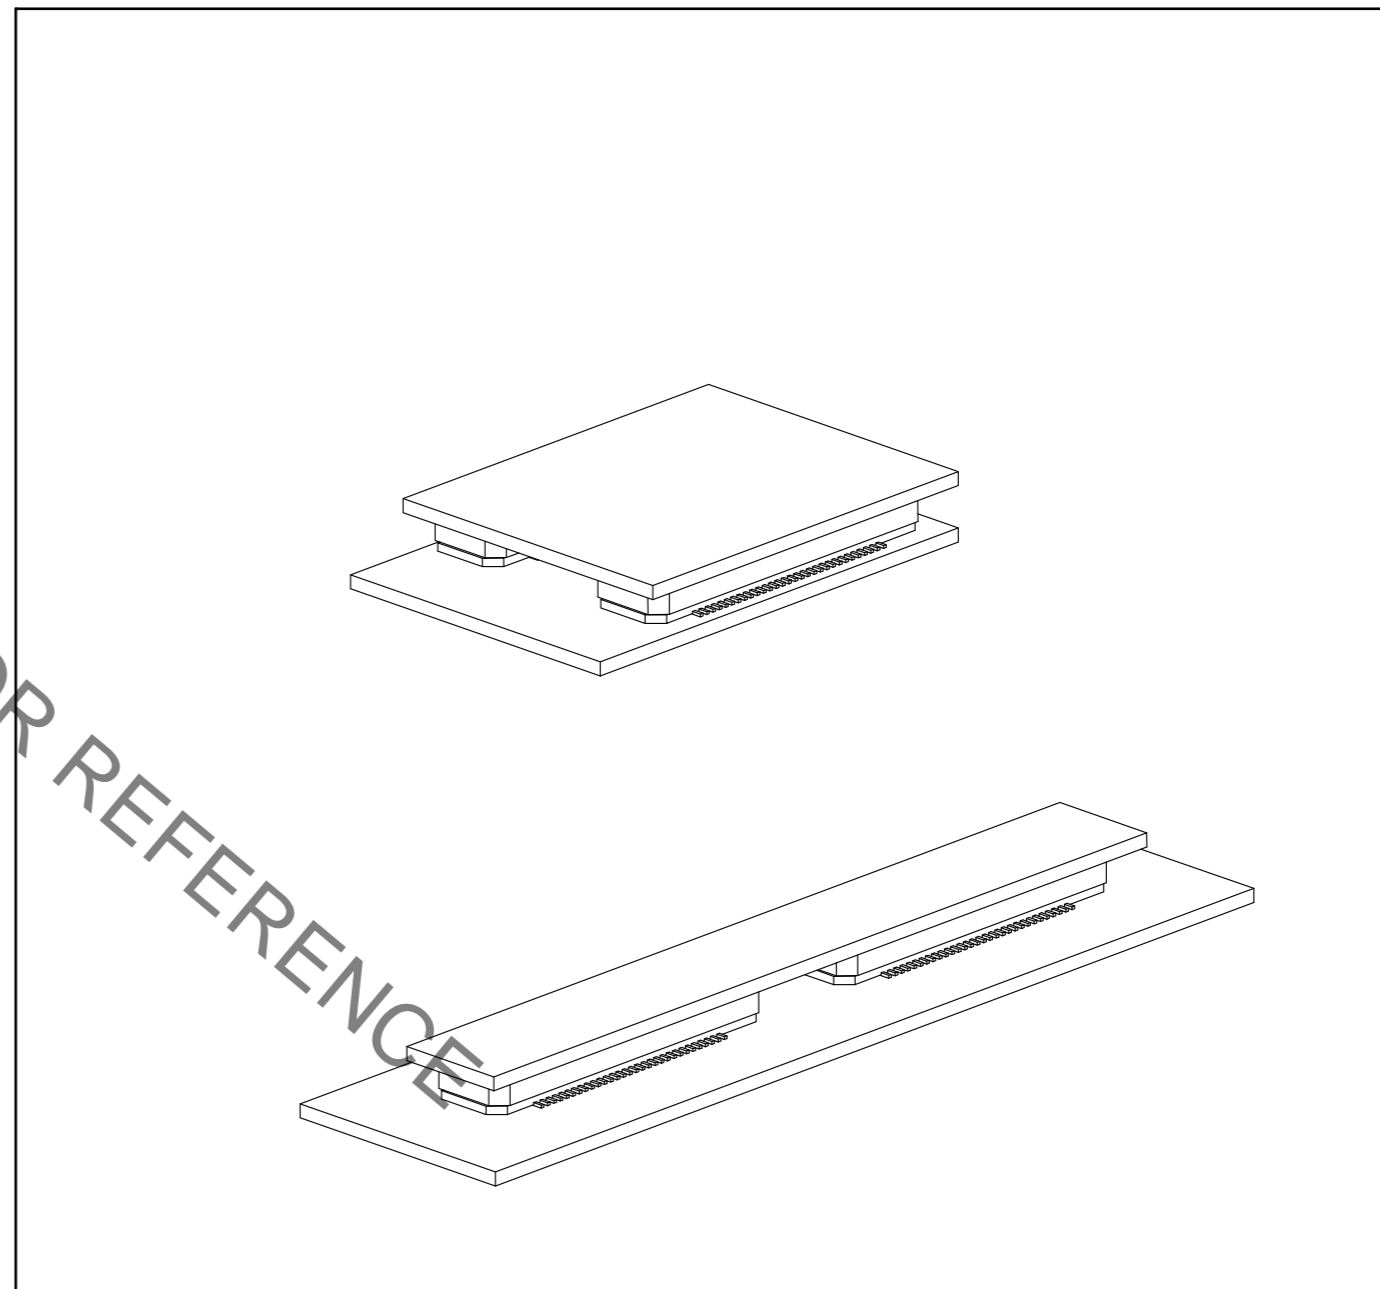

HRS DRAWING FOR REFERENCE

<b>HRS</b>	DRAWING NO.	EDC-150843-71-25
	PART NO.	FX8C-100P-SV2(71)
	CODE NO.	CL578-0545-4-71
		2/2