



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

5500 MHz Suspended Stripline High Pass Filter

Part Number: AE5500SSH6558



Electrical Specifications

Cut Off Frequency: 5.5GHz
Pass Band Frequency: 5.5~23GHz
Pass Band Insertion Loss:
 $\leq 2.0\text{dB @ } 5.5\sim 5.8\text{GHz}$
 $\leq 1.0\text{dB @ } 5.8\sim 23\text{GHz}$
Pass Band VSWR:
 $\leq 1.5:1 @ 5.5\sim 20\text{GHz}$
 $\leq 1.8:1 @ 20\sim 23\text{GHz}$
Stop Band Attenuation: $\geq 60\text{dB @ DC}\sim 4.95\text{GHz}$
Impedance: 50 Ohms
Power Handling: $\leq 15\text{W}$


Mechanical

Mounting Method: Through Holes
Connector Type: SMA-Female
Dimensions: 33 x 24 x 10 mm

Environmental

Operating Temperature: -45 to +85° C
Storage Temperature: -55 to +95° C
Shock: 20 G. 11ms
Vibration: 20 G. 5 to 200 Hz

Outline Drawing:

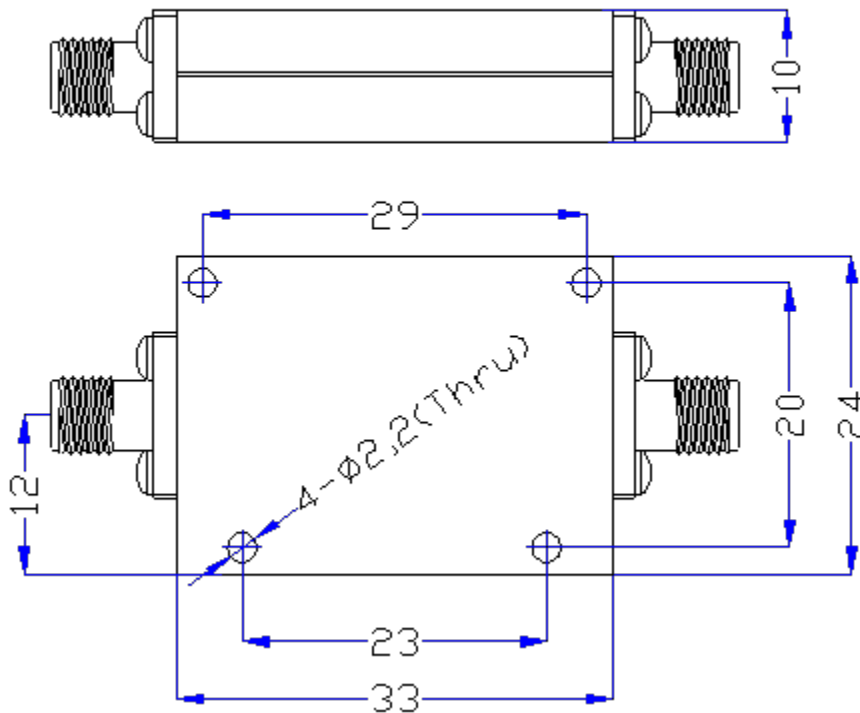

GHFLPDOSODFHVLE
 GHFLPDOSODFHVLEHV
 JOHVHJ

HVBP@
 □ BP@

:HPDGLPHVLRVDHEDOOHGRWWHDERHWROHDFHVGRRWDSSODVORJDVLWLVGHWHPD □ EDOORW □

70 Outwater Lane Phone: (973) 772-4242
 Garfield, NJ 07026 Fax : (973) □

5H1HHEH5D

Email: sales@anatechelectronics.com
 Web: www.anatechelectronics.com