



Que-2-TXT™  
Questions?  
scan to text us fast



HID EQUAL LED LAMPS

ADJUSTABLE OMNI / DARK SKY

250W

HID equal

specifications

| Consumption | Lumen Output | Efficacy   | Voltage       | CRI  | Lens                | Base | Heat Sink | L70 hours | SP   | Ambient Temp (F) | Power Factor | UL listing    | THC   | Beam Angle       |
|-------------|--------------|------------|---------------|------|---------------------|------|-----------|-----------|------|------------------|--------------|---------------|-------|------------------|
| 60 W        | 8,400        | 140 lm / W | 100 - 277 V ⚡ | > 80 | clear polycarbonate | E39  | aluminum  | 50,000    | 6 KV | -40° - 113°      | > 0.9        | damp location | < 20% | omni-directional |


select your lamp

| Part Number         | Color Temp |
|---------------------|------------|
| GI-DSCC-D250-E26UL3 | 4000K      |
| GI-DSCC-C250-E26UL3 | 5000K      |



other


| Dimensions               | Warranty | Gross Weight | Case QTY |
|--------------------------|----------|--------------|----------|
| 10.174" (L) x 6.533" (D) | 6 years  | 3.66 lbs     | 4 pcs    |

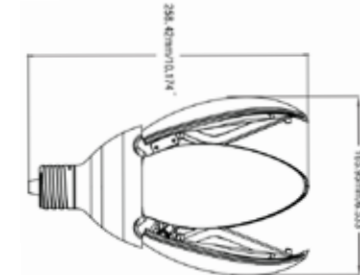


Features

- No UV or IR radiation
- 50,000 hour LED lifespan based on IES LM-80 results and TM-21 calculations
- 80% energy savings compared to HID technology
- Suitable for use in dry or damp locations


Luminous Intensity Distribution

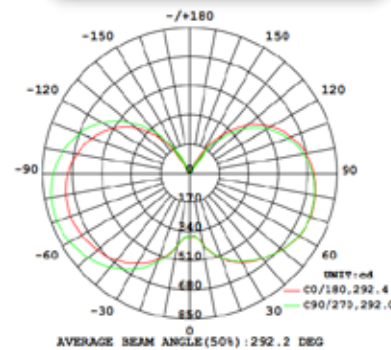

Distance vs Illumination

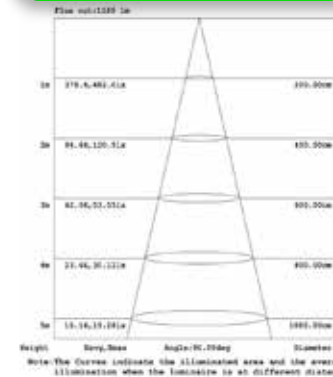

Isolux Diagram

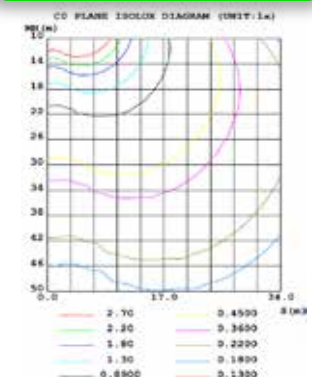

Not all product variations listed on this page may be DLC qualified. Visit [www.designlights.org/search](http://www.designlights.org/search) to confirm qualification.



/greenignite  
@greenignite



[www.greenignite.com](http://www.greenignite.com)



[info@greenignite.com](mailto:info@greenignite.com)



1-877-560-3779