



4190 MHz Cavity Bandpass Filter

Part Number: AE4190B11474



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

Electrical specifications

Center Frequency: 4190 MHz
3dB Bandwidth: 15 MHz +/- 2 MHz
Insertion Loss @ Fc: 3.5 dB Max
Return Loss: 15 dB Min
Rejection: 20 dB min @ Fc +/- 20 MHz
Power Handling: 20W
Impedance: 50 Ω


Mechanical

Mounting Method: 6-32 Threaded Holes
Connector Type: SMA Female
Dimensions: 2.64 x 1.65 x 0.99 in

Environmental

Operating Temperature: -20° C to +70° C
Storage Temperature: -55° C to +85° C
Shock: 20G for 11ms half sine wave, 3 axis both directions
Vibration: 20 G. 5 to 200 Hz

Outline Drawing:

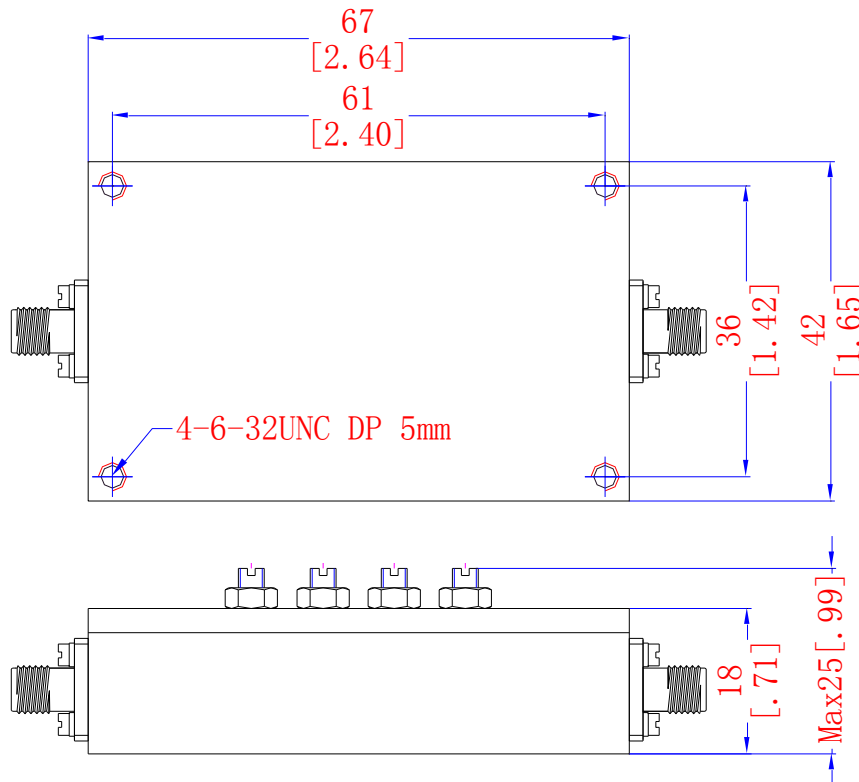

Tolerance: +/-0.01 inches [+/- 0.3mm]

Angles: +/- 1 Deg.

*Tolerance as shown unless otherwise specified in the datasheet electrical specification tables above.

*When max dimensions are called out the above tolerances do not apply as long as it is under the max call out.