


May.1.2023 Copyright 2023 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

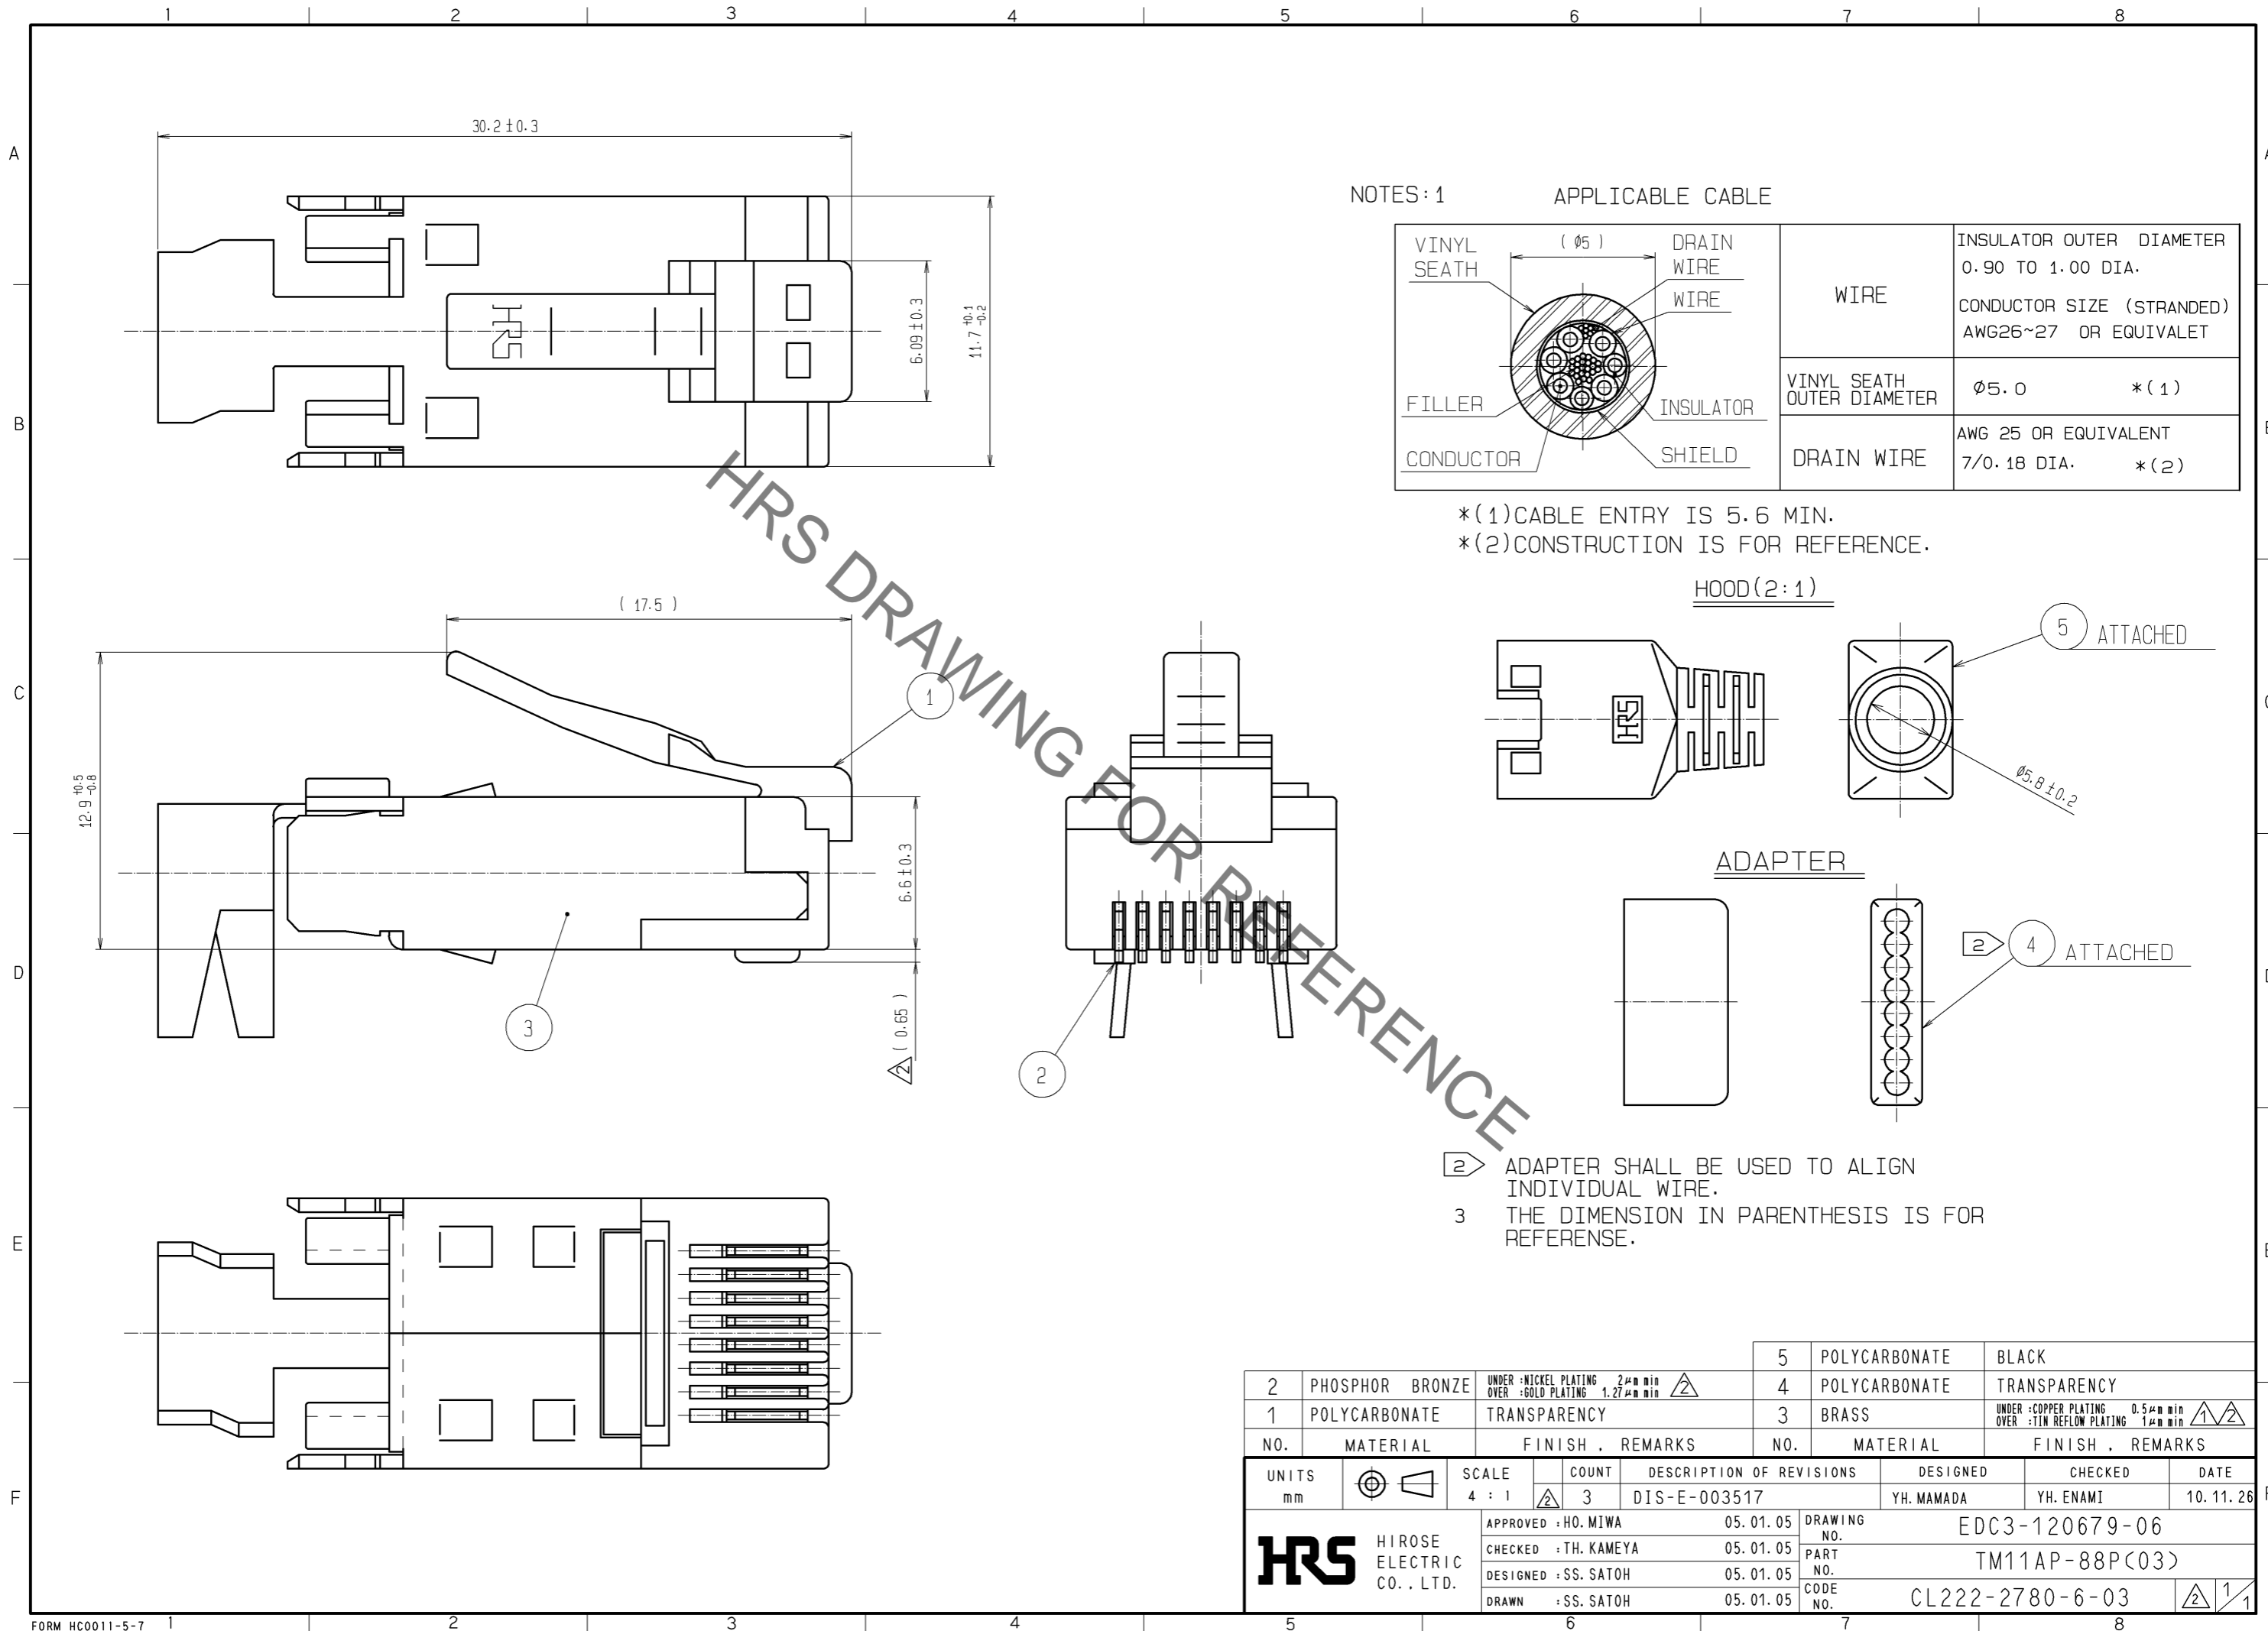

NOTES: 1


APPLICABLE CABLE

VINYL SEATH	( Ø5 )	DRAIN WIRE	WIRE	INSULATOR OUTER DIAMETER	0.90 TO 1.00 DIA.
FILLER		WIRE		CONDUCTOR SIZE (STRANDED)	AWG26~27 OR EQUIVALET
CONDUCTOR		INSULATOR	VINYL SEATH OUTER DIAMETER	Ø5.0	*(1)
		SHIELD	DRAIN WIRE	AWG 25 OR EQUIVALENT	7/0.18 DIA. *(2)


\*(1)CABLE ENTRY IS 5.6 MIN.

\*(2)CONSTRUCTION IS FOR REFERENCE.

HOOD(2:1)

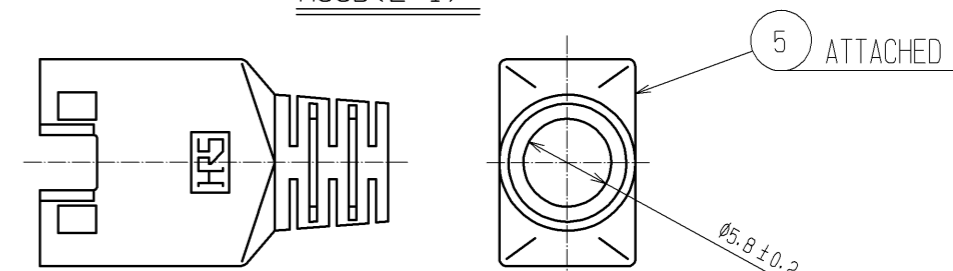

ADAPTER

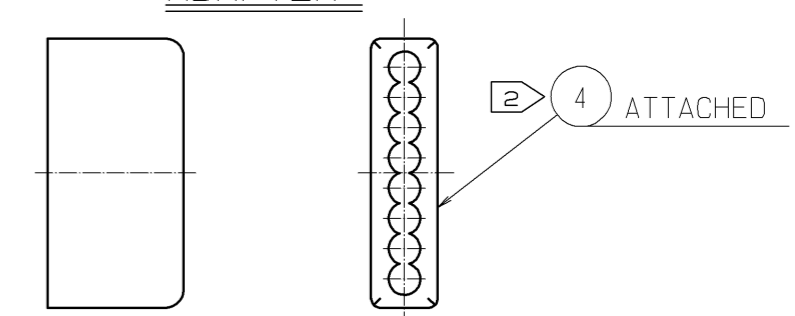

2 ADAPTER SHALL BE USED TO ALIGN INDIVIDUAL WIRE.

3 THE DIMENSION IN PARENTHESIS IS FOR REFERENCE.

2	PHOSPHOR BRONZE	UNDER :NICKEL PLATING 2µm min OVER :GOLD PLATING 1.27µm min	5	POLYCARBONATE	BLACK
1	POLYCARBONATE	TRANSPARENCY	4	POLYCARBONATE	TRANSPARENCY
			3	BRASS	UNDER :COPPER PLATING 0.5µm min OVER :TIN REFLOW PLATING 1µm min
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 4 : 1	COUNT 3	DESCRIPTION OF REVISIONS DIS-E-003517	DESIGNED YH.MAMADA
		APPROVED :HO.MIWA	05.01.05	DRAWING NO.	EDC3-120679-06
HIROSE ELECTRIC CO., LTD.		CHECKED :TH.KAMEYA	05.01.05	PART NO.	TM11AP-88P(03)
		DESIGNED :SS.SATOH	05.01.05	CODE NO.	CL222-2780-6-03
		DRAWN :SS.SATOH	05.01.05		1