
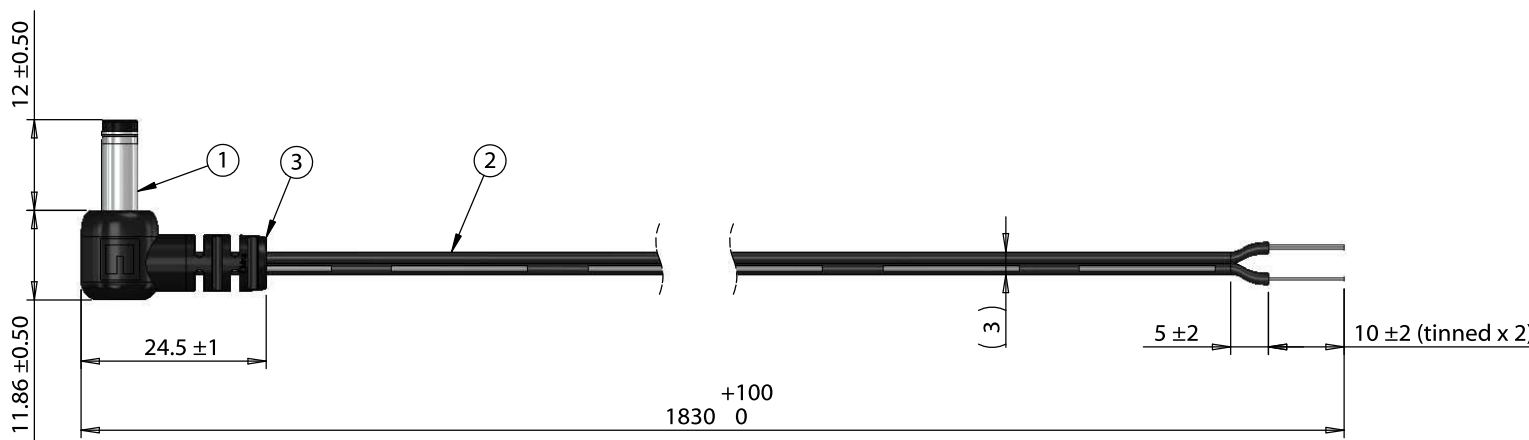


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00028	Connector, dc plug, 4.75x1.7xL20 mm, EIAJ-3, molding style, spring contacts	1	
2	30-00404	Wire, 2C TS, 24 AWG, UL2468, 300V, 80C, 3.0 mm, VW-1, PVC, 87A	1	
3	24-00008	Overmold, PVC	1	black

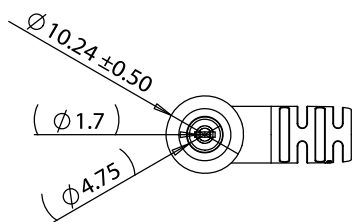

50-00028	wire color
center	black with stripe
sleeve	black

Notes:
Functionally equivalent components may be substituted

Revision: A	Date: 02/01/2018	Description: Initial release	Prepared: GL Digitally signed by GL Date: 2018.03.07 08:48:58 -08'00'	Notes: RoHS compliant Function test: no open, no short circuit, no intermittent	<h1>TENSILITY</h1> tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
			Verified: PS Digitally signed by PS Date: 2018.03.07 11:15:31 -08'00'	Description: Cable, 1830 mm, 4.75x1.7x12 mm 90° 50-00028 dc plug to 10 mm tinned, 24 AWG, UL2468, 30-00404 wire	
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Size: A Part number: 10-02496 Scale: 1:1	

5

4

3

2

1



Sheet 1 of 1