


# EBC012



## Splitter box

ZDO8H05HMSS0000-00STAK190MSS

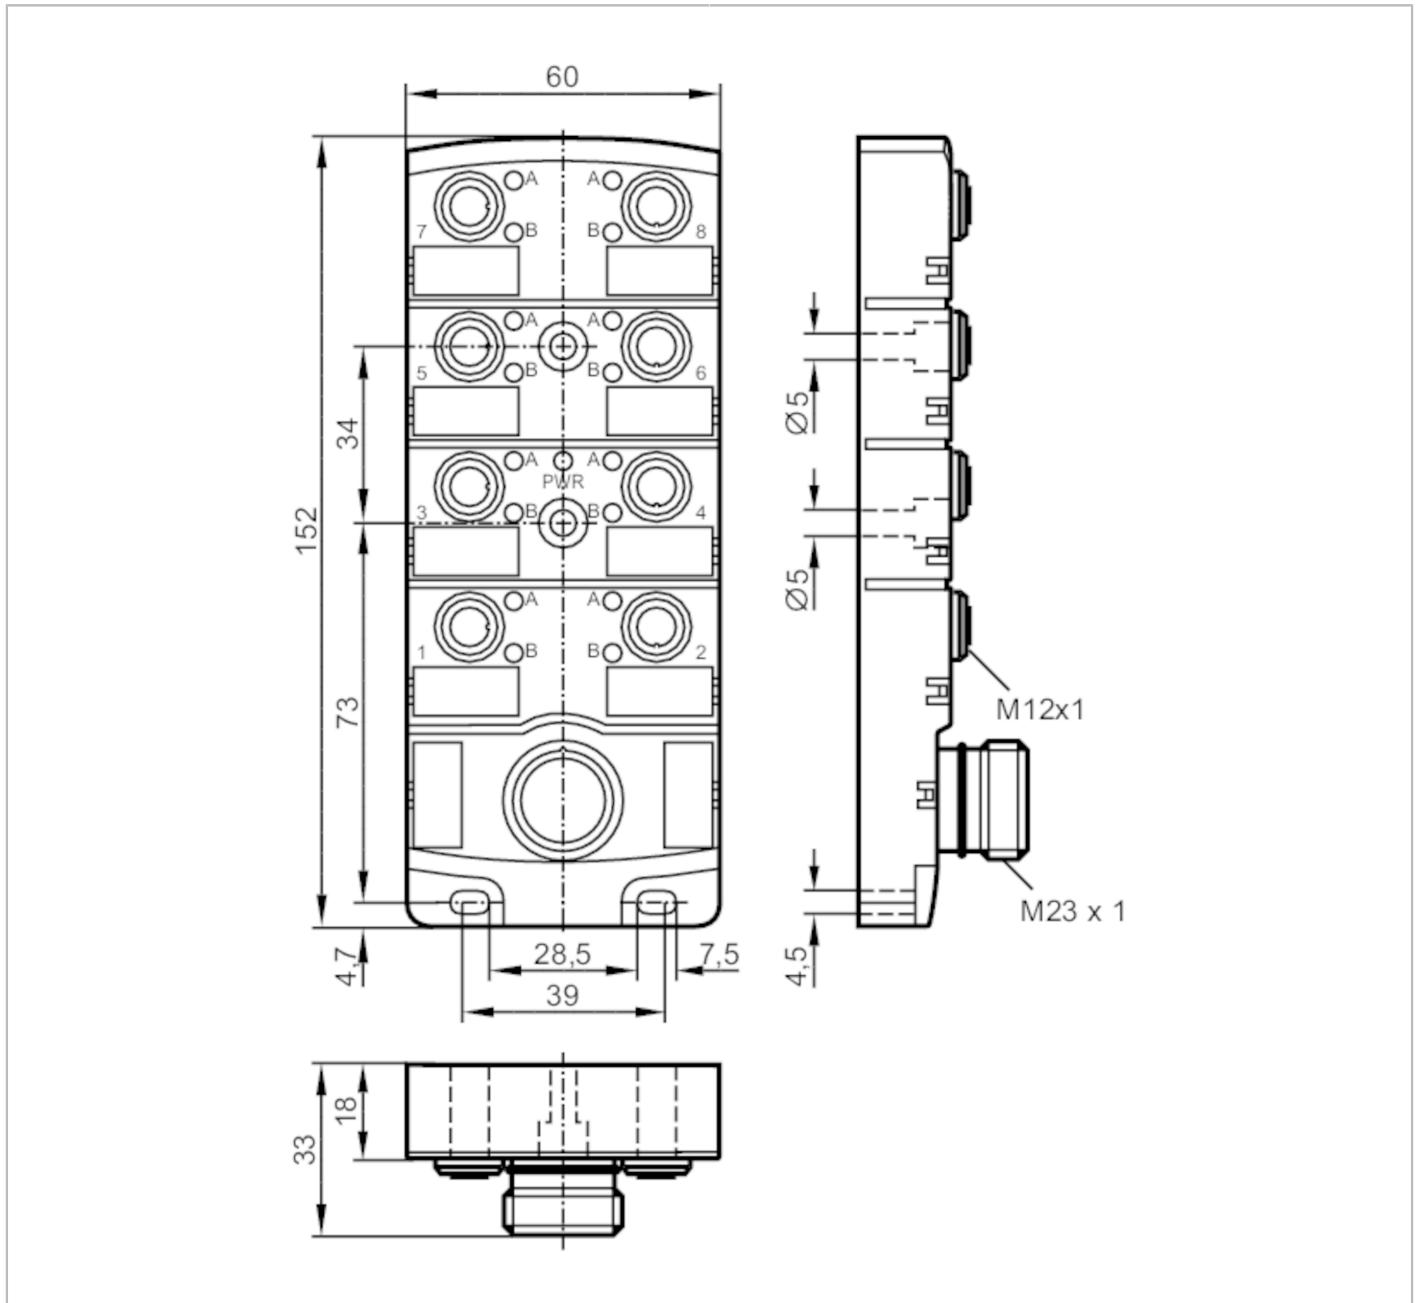

Application	
Special feature	Free from silicone; Gold-plated contacts
Free from silicone	yes
Electrical data	
Operating voltage [V]	10...30 DC; ("supply class 2" to cULus)
Max. current load per module/slot [A]	4
Max. current load total [A]	10
Outputs	
Electrical design	PNP

# EBC012



## Splitter box

ZDO8H05HMSS0000-00STAK190MSS

### Operating conditions

Ambient temperature	[°C]	-25...80
Protection		IP 67

### Tests / approvals

UL approval	Enclosure type	Type 1
-------------	----------------	--------

### Mechanical data

Weight	[g]	306
Dimensions	[mm]	33 x 60 x 152
Materials		PA
Moulded-body material		PA
Number of ports splitter box		8
Connector type		M12

### Displays / operating elements

Display	switching status	16 x LED, yellow
	operation	1 x LED, green

### Accessories


Items supplied	Protective caps: 2 labels: 8
----------------	---------------------------------

### Remarks

Pack quantity	1 pcs.
---------------	--------

### Electrical connection - Connection

Connector: 1 x M23; Moulded body: PA; Contacts: gold-plated; Tightening torque: 0.8...1.5 Nm




# EBC012



## Splitter box

ZDO8H05HMSS0000-00STAK190MSS

### Connection

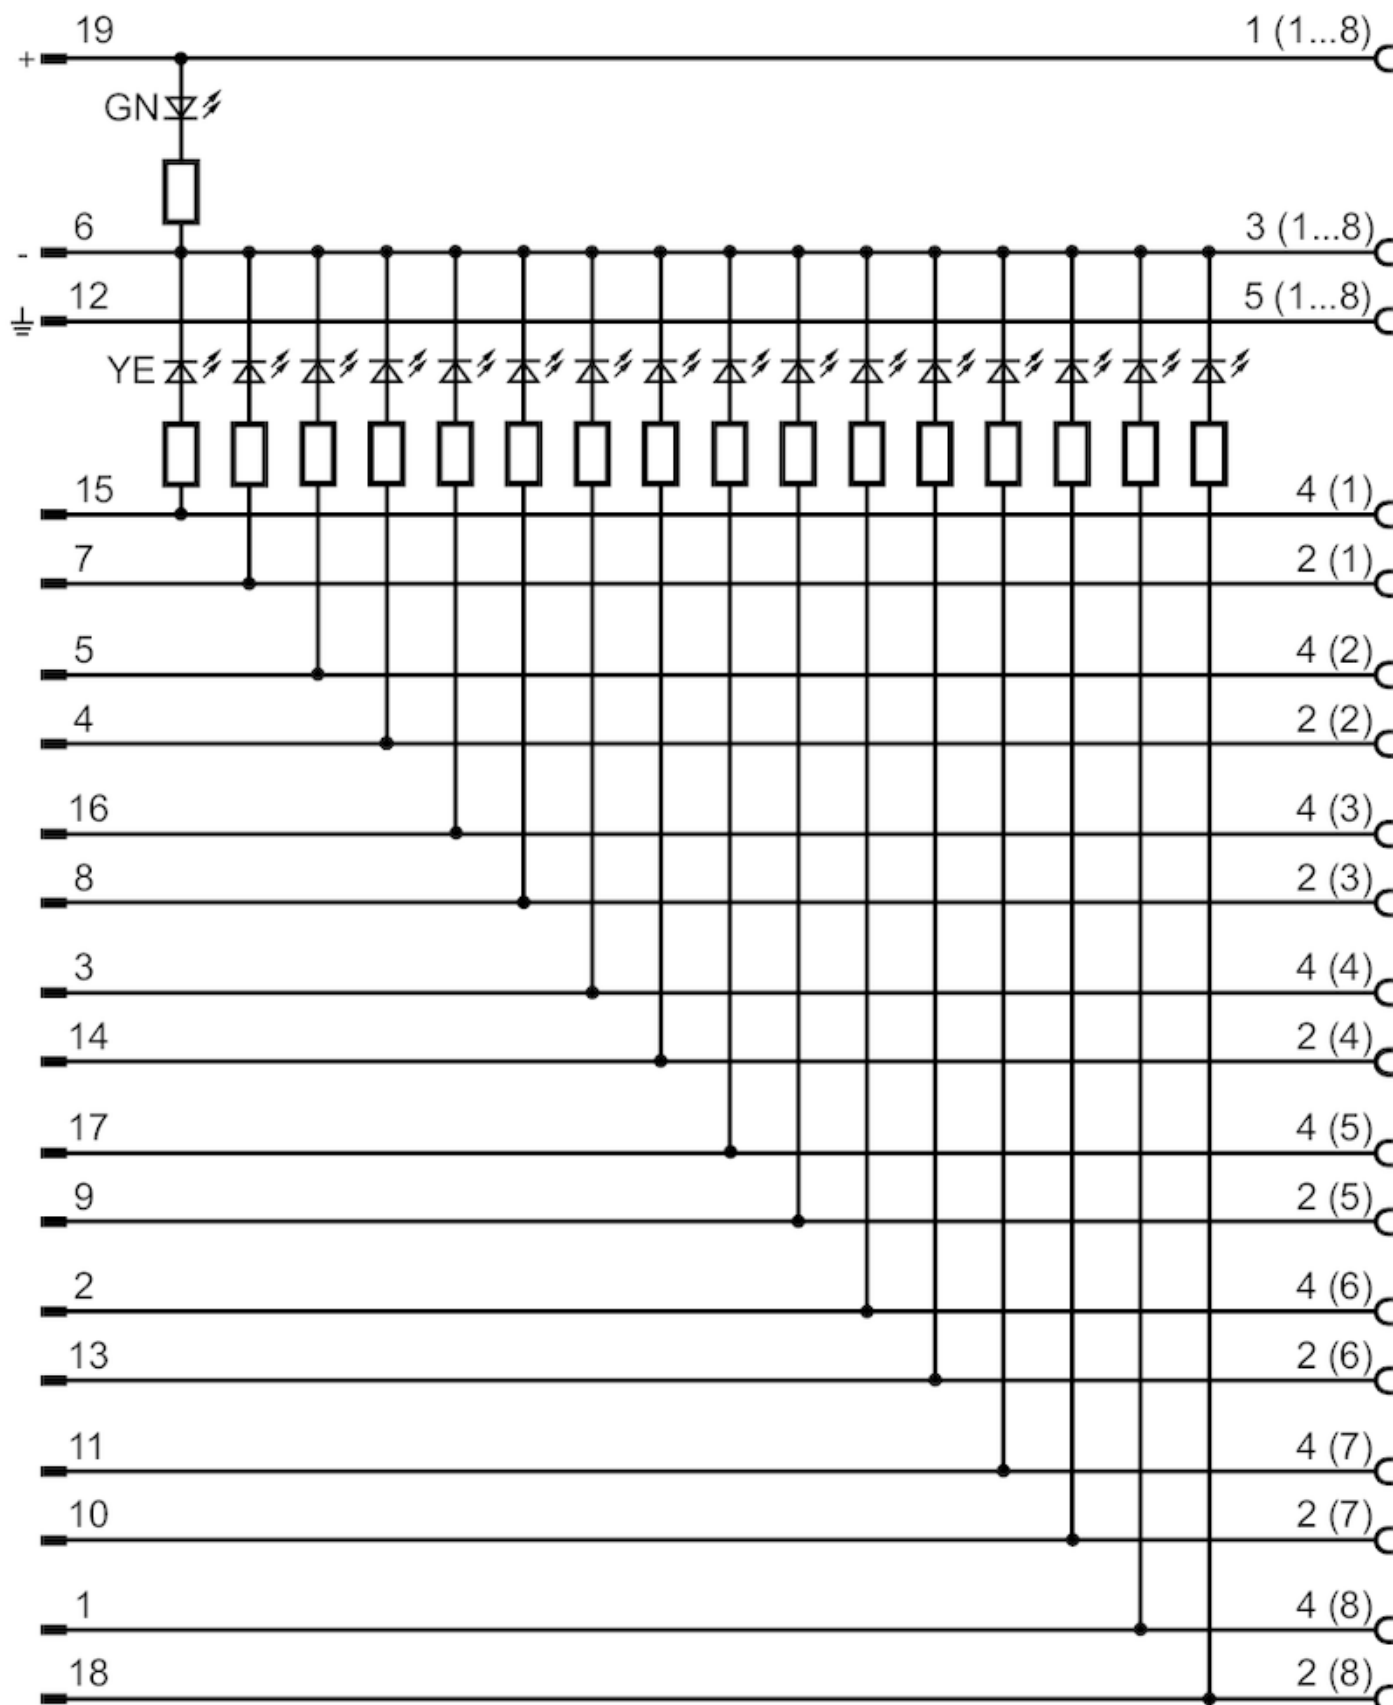

# EBC012



## Splitter box

ZDO8H05HMSS0000-00STAK190MSS

### Electrical connection - slot

Connector: 8 x M12; coding: A; Moulded body: PA; Contacts: gold-plated; Tightening torque: 0.8...1.5 Nm

