

Three-wire installation terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 2.5 mm², Width: 6 mm, Colour: Beige

Business data

| | |
|--|-----------------------------------|
| Article number | 1415.2 |
| Article name | DLIS 2,5 N BG |
| GTIN (EAN) | 4044211044602 |
| Packaging unit | 50 |
| Quantity unit | PC |
| Weight per piece (not including packaging) | 9.4 g |
| Weight per piece (including packaging) | 10.76 g |
| Unit of weight | G |
| Customs number | 85369010 |
| Country of origin | CZ |
| Product description | Three-wire installation terminals |
| Colour | Beige |

Technical data

Dimensions

| | |
|------------------|---------|
| Length | 90.5 mm |
| Width | 6 mm |
| Height TS 35/7.5 | 53 mm |

Ratings

| | |
|---|---------------------|
| Rated voltage | 400 V |
| Rated current | 24 A |
| Rated cross-section | 2.5 mm ² |
| Rated impulse voltage | 4 kV |
| Overvoltage category | III |
| Contamination degree | 3 |
| Maximum power dissipation for nominal condition | 0.77 W |

Connection data

| | |
|--|---------------------|
| Connection principle | Screw connection |
| Connection position | Lateral |
| Connections | 2 |
| Number of potentials | 1 |
| Wire cross-section single-core (rigid) / stranded, min. | 0.2 mm ² |
| Wire cross-section single core (rigid)/stranded, max. | 4 mm ² |
| Wire cross-section stranded, min. | 0.2 mm ² |
| Wire cross-section stranded, max. | 4 mm ² |
| Wire cross-section stranded with wire-end ferrules, min. | 0.2 mm ² |
| Wire cross-section stranded with wire-end ferrules, max. | 2.5 mm ² |
| Wire cross-section AWG, min. | 22 |
| Wire cross-section AWG, max. | 14 |
| Stripping length | 8 mm |
| Screw head | Slotted |
| Screw threading | M 2,5 |
| Tightening torque, min. | 0.4 Nm |
| Tightening torque, max. | 0.8 Nm |
| N-function possible | ✓ |

Data sheet

1415.2 DLIS 2,5 N BG

Technical data

Materials

| | |
|---------------------------|---------------|
| Insulation housing | Polyamide 6.6 |
| Flammability class UL 94 | V-2 |
| Working temperature, min. | -40 °C |
| Working temperature, max. | 105 °C |



Further technical data

| | |
|-------------------------------------|-------------------------|
| Mounting type | Mounting rail TS 35/7,5 |
| Gauge plug acc. to EN 60 947-1 | A3 |
| Number of cross-connection channels | 1 |
| End plate required | ✓ |


Environmental Product Compliance

| | |
|--------------------------------|------------|
| REACH Conform | yes |
| REACH Reference date | 2023-01-17 |
| REACH Candidate Substance Note | No |
| RoHS Conform | yes |

Media

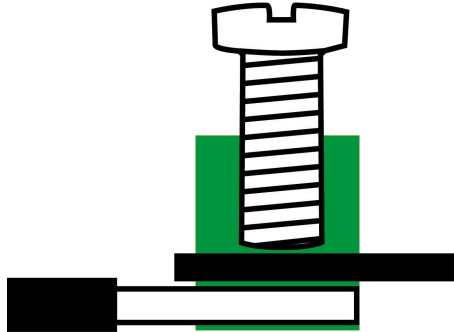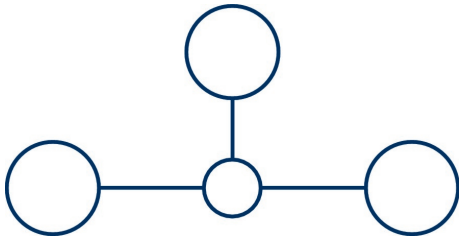

M2.5



Accessories

End plate


End plate, Width: 1.5 mm, Colour: Beige



| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|--------------|---------------|----------------|
| <u>2829.2</u> | AP 2,5/S BG | 4044211055554 | 20 ST |

End stop


End stop, Mounting type: Mounting rail TS 35/7.5, Width: 9.5 mm, Colour: Beige



| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|---------------|---------------|----------------|
| <u>2828.0</u> | ES 35/K/ST BG | 4044211055547 | 50 |

Quick marking

Terminal marker / Pocket Maxicard, Length: 5 mm, Width: 6 mm, Colour: White



| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|----------------|---------------|----------------|
| <u>4702.7</u> | PMC SB 6/50 WH | 4044211089986 | 500 ST |

Insulation plate

Insulation plate, Colour: Beige



| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|--------------|---------------|----------------|
| <u>2566.2</u> | TRS 3 BG | 4044211053567 | 100 ST |

Data sheet

1415.2 DLIS 2,5 N BG

Screwdriver

Screwdriver with bare blade, Colour: Black-grey



| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|--------------|---------------|----------------|
| 1085.0 | SDB 0,5x3,0 | 4044211014643 | 1 ST |