


2 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

7 8

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					△				
△					△				

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					△				
△					△				


A B C D E F

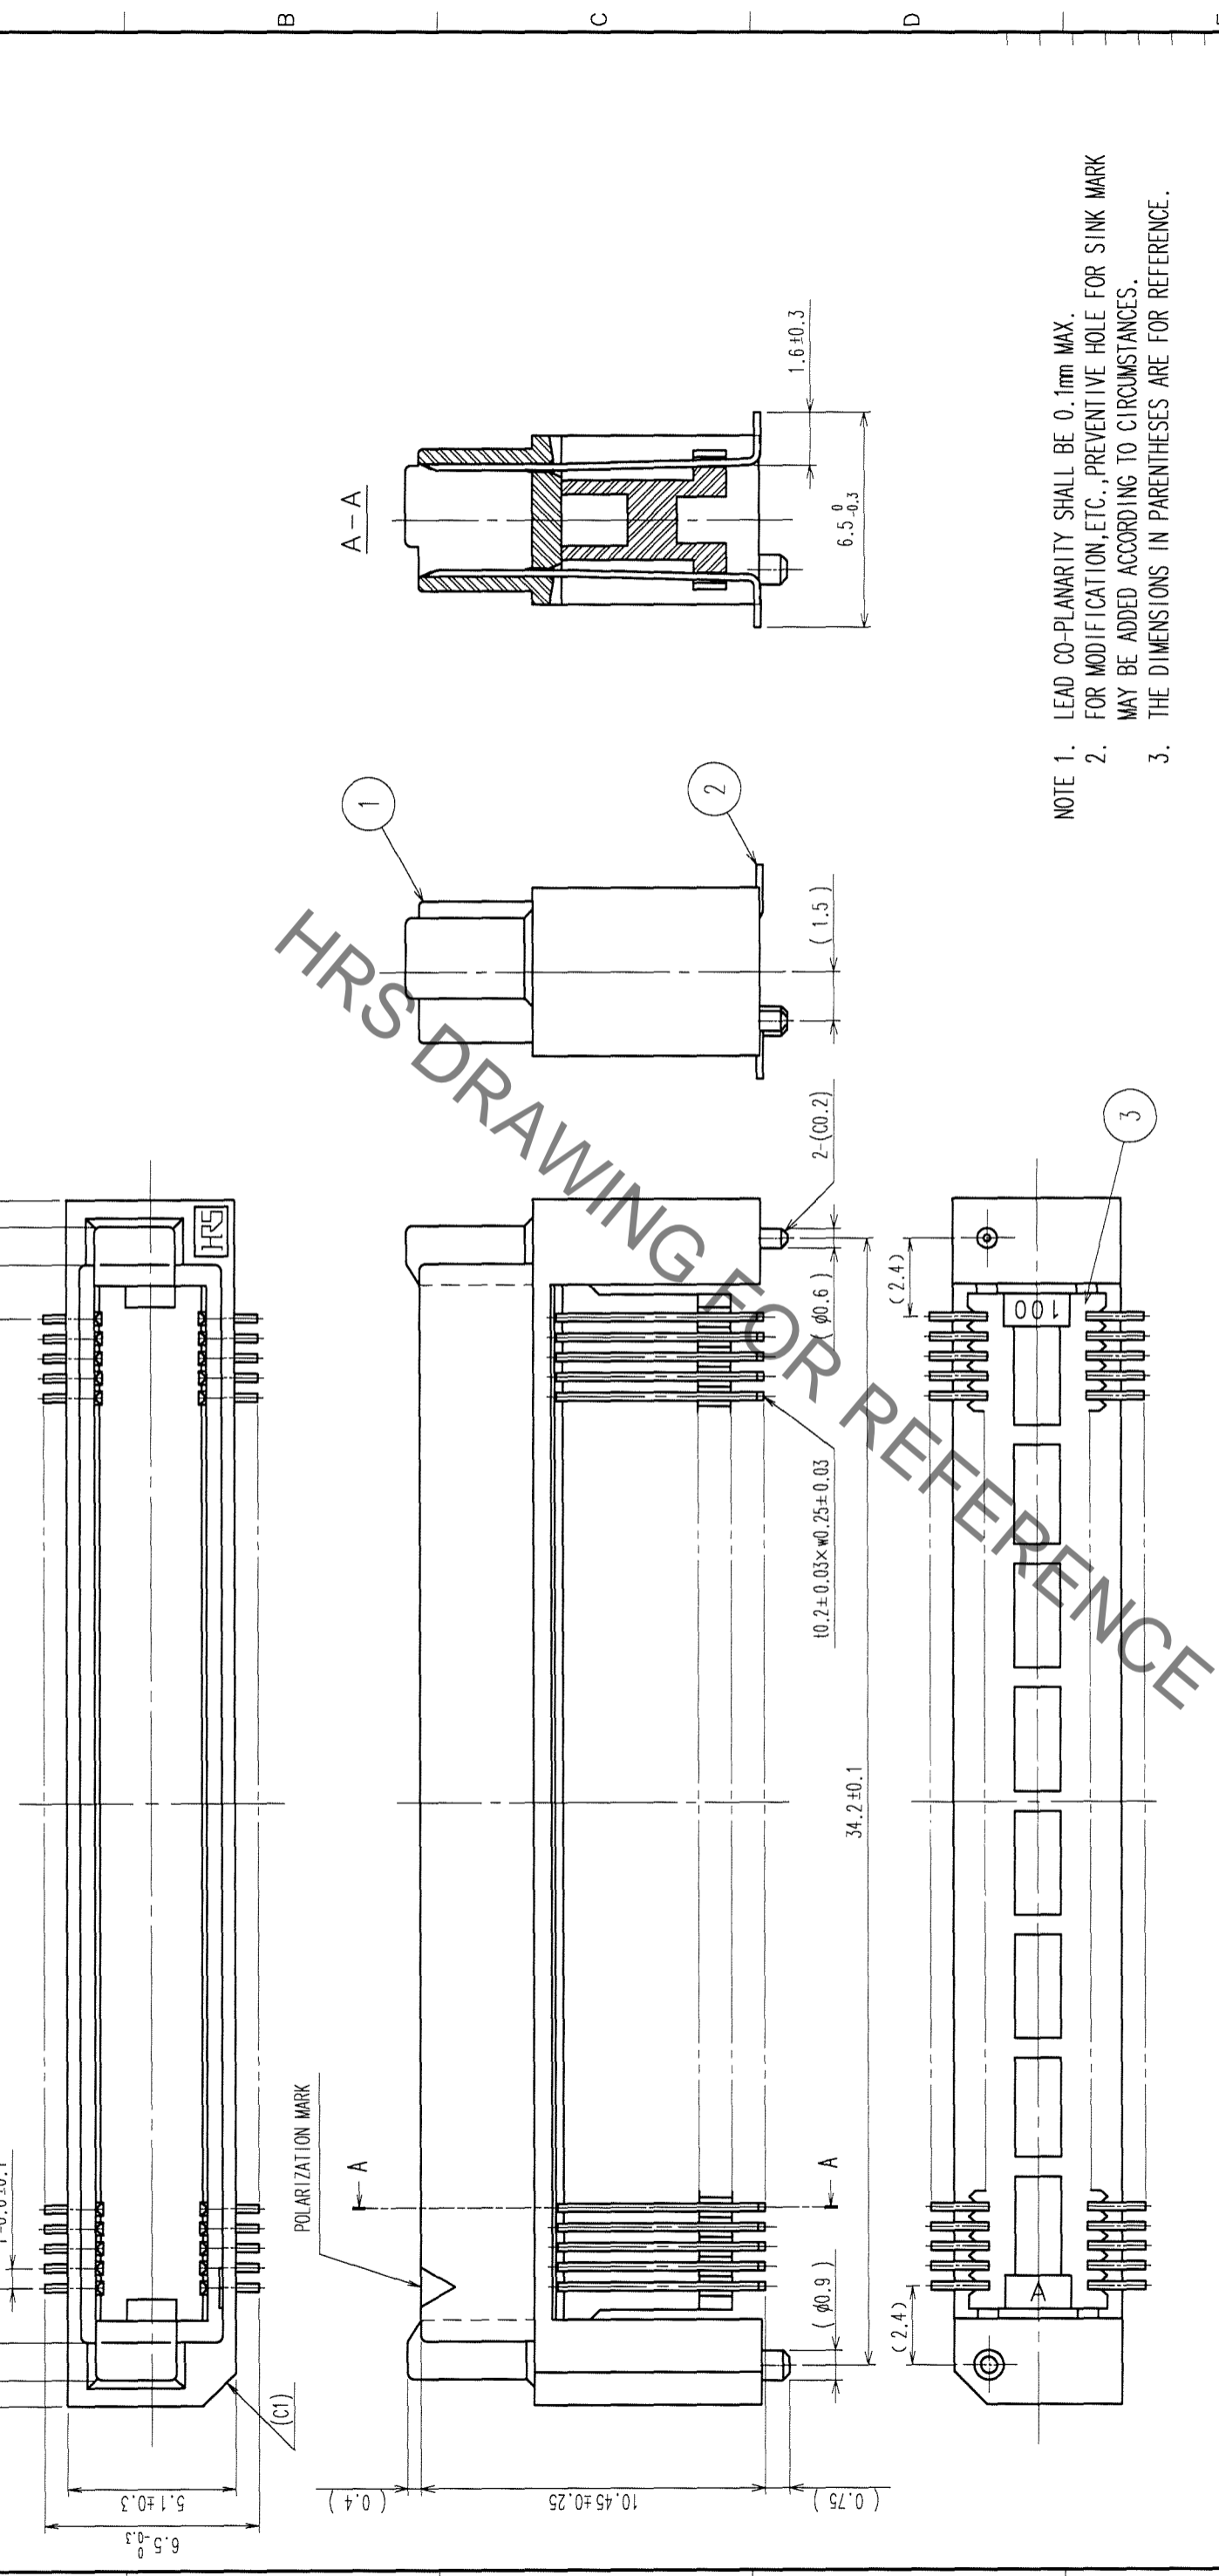

HRS DRAWING FOR REFERENCE

- NOTE 1. LEAD CO-PLANARITY SHALL BE 0.1mm MAX.  
 2. FOR MODIFICATION, ETC., PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED ACCORDING TO CIRCUMSTANCES.  
 3. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

1, 3	PPS	LIGHT BROWN (UL94V-0)	2	PHOSPHOR BRONZE	CONTACT AREA: GOLD 0.1μm min. LEAD AREA: TIN-PLATING 1μm min. UNDER PLATING: NICKEL 1μm min.
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD) CL			DRAWN K. NAKAMURA 05.11.18	DESIGNED K. NAKAMURA 05.11.18	CHECKED K. Ogasawa 05.11.21
					APPROVED Hi Okawa 05.11.21
					RELEASED
DRAWING NO. EDC3-150873-25		PART NO. FX8C-100P-SV6(71)			
SCALE 5 : 1	UNITS mm		CODE NO. CL578-0605-4-71	1/1	

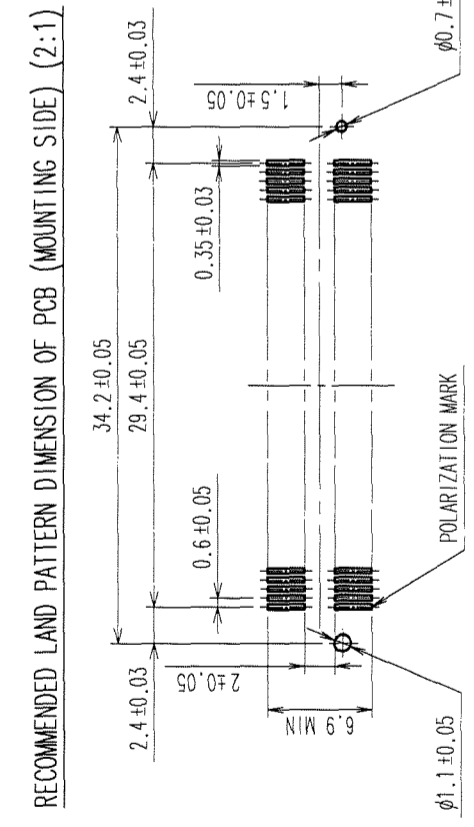

TO PCK

5 6 7 8