


Universal Kelvin Test Lead Set

Features

- Gold-Plated Kelvin Crocodile Clips Allow 4-Wire Resistive Measurements
- 48" (1.2m) Double Insulated, Bi-Color Silicone Cable Boasts 250+ Copper Strands for Maximum Flexibility and Overall Performance
- Compatible with All Industry Standard 4mm Instrument Sockets and Spade-Accommodating Binding Posts

NTE Type No.	Kit Contains
72-076	1 Pair (Red/Grey & Black/Grey) of 48" (1.2m) Kelvin Crocodile Clip Leads using low loss 1mm ² multistranded double skin silicone cables terminating in 4mm Shutter Plugs color coded to each relevant Jaw. 2 Pairs (2 Red & 2 Black) of Full Safety Spade Adapters.

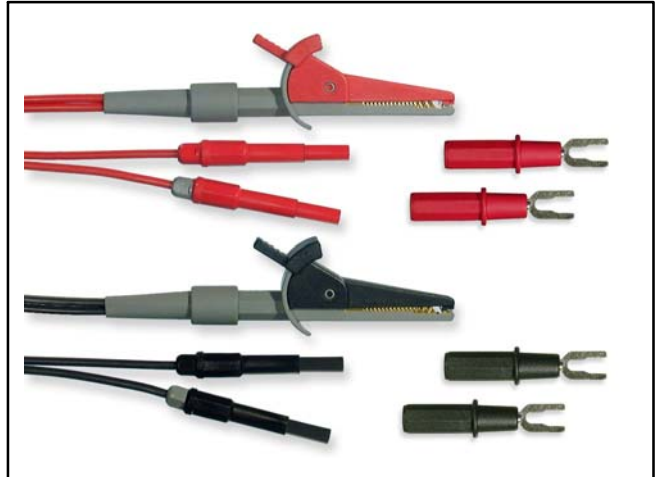

OEM Fixed Lead Probe Test Lead Set

Features

- UL/CSA Compliant
- 48" (1.2m) Double Insulated, Bi-Color Silicone Cable Boasts 250+ Copper Strands for Maximum Flexibility and Overall Performance
- 8-32-UNC-2A Threaded Notched Needle Tip Accepts Screw-On Accessories
- Compatible with "Simpson" Style Instruments

NTE Type No.	Set Contains
NEW 72-175	1 Pair (Red & Black) of Double Insulated Silicone Lead Assemblies with Right Angle Sockets



Specifications

IEC 1010 Rating: 1000V CAT3
 Temperature Rating: -10° to +150°C

Multiple Feature Test Probe

Features

- UL Compliant
- 48" (1.2m) Double Insulated, #18 AWG (65/36) Tinned Copper with +90°C PVC Insulation
- Industry Standard 8-32-UNC-2A Threaded Probe Tip Accepts Screw-On Accessories

NTE Type No.	Description
NEW 72-184-0	1 Test Lead Assembly, Black, Test Probe to Right Angle Shrouded Banana Plug
NEW 72-184-2	1 Test Lead Assembly, Red, Test Probe to Right Angle Shrouded Banana Plug



Specifications

Rating: 1000V CAT2 20 Amps
 Temperature Rating: -10° to +120°C