Data sheet 1388.5 KBL 2,5-4-D BU





Feed-through terminal for direct mount/block variant, Screw connection, Mounting type: Mounting surface, Rated cross-section: 4 mm², Width: 6 mm, Colour: Blue

RAL: Ähnlich 5005

Business data

Zaomoco data	
Article number	<u>1388.5</u>
Article name	KBL 2,5-4-D BU
GTIN (EAN)	4044211081737
Packaging unit	100
Quantity unit	PC
Weight per piece (not including packaging)	8.79 g
Weight per piece (including packaging)	9.4 g
Unit of weight	G
Customs number	85369010
Country of origin	DE
Prio-Article	1388.2
Product description	Feed-through terminal for direct mount/block variant





Dimensions 48 mm Width 6 mm Height 36.5 mm Ratings 700 V Rated voltage 700 V Rated current 32 A Rated cross-section 4 mm² Rated impulse voltage 6 kV Overvoltage category III Contamination degree 3 Maximum power dissipation for nominal condition 1.02 W Connection data Connection principle Connection position Lateral Connections 2 Number of terminals per level 2 Number of terminals per level 1 Wire cross-section single-core (rigid) / stranded, min. 0.2 mm² Wire cross-section stranded, min. 0.2 mm² Wire cross-section stranded with wire-end ferrules, min. 0.2 mm² Wire cross-section stranded with wire-end ferrules, min. 0.2 mm² Wire cross-section AWG, min. 22 Wire cross-section AWG, min. 22 Wire cross-section AWG, max. 10 Stripping length 12 mm S		
Length 48 mm Width 6 mm Height 36.5 mm Ratings 700 V Rated voltage 700 V Rated current 32 A Rated cross-section 4 mm² Rated impulse voltage 6 kV Overvoltage category III Contamination degree 3 Maximum power dissipation for nominal condition 1.02 W Connection data Connection data Connection position Lateral Connection position Lateral Connections 2 Number of terminals per level 2 Number of levels 1 Wire cross-section single-core (rigid) / stranded, min. 0.2 mm² Wire cross-section stranded, min. 0.2 mm² Wire cross-section stranded with wire-end ferrules, min. 0.2 mm² Wire cross-section stranded with wire-end ferrules, max. 4 mm² Wire cross-section AWG, min. 22 Wire cross-section AWG, max. 10 Stripping length 12 mm Screw head <th>Technical data</th> <th></th>	Technical data	
Width 6 mm Height 36.5 mm Ratings Rated voltage 700 V Rated current 32 A Rated cross-section 4 mm² Rated impulse voltage 6 kV Overvoltage category III Contamination degree 3 Maximum power dissipation for nominal condition 1.02 W Connection data Connection principle Screw connection Connection position Lateral Connections 2 Number of terminals per level 2 Number of levels 1 Wire cross-section stranded, min. 0.2 mm² Wire cross-section stranded, min. 0.2 mm² Wire cross-section stranded with wire-end ferrules, min. Wire cross-section stranded with wire-end ferrules, max. Wire cross-section AWG, min. 22 Wire cross-section AWG, min. 22 Wire cross-section AWG, max. 10 Stripping length 12 mm Screw head Slotted	Dimensions	
Ratings Rated voltage 700 V Rated current 32 A Rated cross-section 4 mm² Rated impulse voltage 6 kV Overvoltage category III Contamination degree 3 Maximum power dissipation for nominal condition 1.02 W Connection data Connection principle Screw connection Connection position Lateral Connections 2 Number of terminals per level 2 Number of levels 1 Wire cross-section single-core (rigid) / stranded, min. 0.2 mm² Wire cross-section stranded, min. 0.2 mm² Wire cross-section stranded, min. 0.2 mm² Wire cross-section stranded with wire-end ferrules, min. Wire cross-section stranded with wire-end ferrules, max. Wire cross-section AWG, min. 22 Wire cross-section AWG, min. 22 Wire cross-section AWG, max. 10 Stripping length 12 mm Screw head Slotted	Length	48 mm
Ratings Rated voltage 700 V Rated current 32 A Rated cross-section 4 mm² Rated impulse voltage 6 kV Overvoltage category III Contamination degree 3 Maximum power dissipation for nominal condition 1.02 W Connection data Connection principle Screw connection Connection principle Screw connection Connections 2 Number of terminals per level 2 Number of levels 1 Wire cross-section single-core (rigid) / stranded, min. 0.2 mm² Wire cross-section stranded, min. 0.2 mm² Wire cross-section stranded with wire-end ferrules, min. 0.2 mm² Wire cross-section stranded with wire-end ferrules, min. 0.2 mm² Wire cross-section stranded with wire-end ferrules, min. 0.2 mm² Wire cross-section stranded with wire-end ferrules, min. 0.2 mm² Wire cross-section stranded with wire-end ferrules, min. 0.2 mm² Wire cross-section stranded with wire-end ferrules, min. 0.2 mm² Wire cross-section stranded with wire-end ferrules, max. 0.2 mm² Wire cross-section stranded with wire-end ferrules, max. 0.2 mm² Wire cross-section stranded with wire-end ferrules, max. 0.2 mm² Wire cross-section stranded with wire-end ferrules, max. 0.2 mm² Wire cross-section stranded with wire-end ferrules, max. 0.2 mm² Wire cross-section stranded with wire-end ferrules, max. 0.2 mm² Wire cross-section stranded with wire-end ferrules, max. 0.2 mm² Wire cross-section AWG, min. 0.2 mm²	Width	6 mm
Rated voltage 700 V Rated current 32 A Rated corses-section 4 mm² Rated impulse voltage 6 kV Overvoltage category III Contamination degree 3 Maximum power dissipation for nominal condition 1.02 W Connection data Connection principle Screw connection Connection position Lateral Connections 2 Number of terminals per level 2 Number of levels 1 Wire cross-section single-core (rigid) / stranded, min. 0.2 mm² Wire cross-section stranded, min. 0.2 mm² Wire cross-section stranded with wire-end ferrules, min. 0.2 mm² Wire cross-section stranded with wire-end ferrules, min. 0.2 mm² Wire cross-section stranded with wire-end ferrules, max. 0.2 mm² Wire cross-section stranded with wire-end ferrules, max. 0.2 mm² Wire cross-section stranded with wire-end ferrules, max. 0.2 mm² Wire cross-section stranded with wire-end ferrules, max. 0.2 mm² Wire cross-section stranded with wire-end ferrules, max. 0.2 mm² Wire cross-section AWG, min. 22 Wire cross-section AWG, min. 22 Wire cross-section AWG, max. 10 Stripping length 12 mm Screw head Slotted	Height	36.5 mm
Rated current 32 A Rated cross-section 4 mm² Rated impulse voltage 6 kV Overvoltage category III Contamination degree 3 Maximum power dissipation for nominal condition 1.02 W Connection data Connection principle Screw connection Connection position Lateral Connections 2 Number of terminals per level 2 Number of levels 1 Wire cross-section single-core (rigid) / stranded, min. 0.2 mm² Wire cross-section stranded, min. 0.2 mm² Wire cross-section stranded, max. 6 mm² Wire cross-section stranded with wire-end ferrules, min. 0.2 mm² Wire cross-section stranded with wire-end ferrules, min. 0.2 mm² Wire cross-section stranded with wire-end ferrules, max. 4 mm² Wire cross-section AWG, min. 22 Wire cross-section AWG, min. 22 Wire cross-section AWG, max. 10 Stripping length 12 mm Screw head	Ratings	
Rated impulse voltage 6 kV Overvoltage category III Contamination degree 3 Maximum power dissipation for nominal condition 1.02 W Connection data Connection principle Screw connection Connection position Lateral Connections 2 Number of terminals per level 2 Number of levels 1 Wire cross-section single-core (rigid) / stranded, min. 0.2 mm² Wire cross-section stranded, min. 0.2 mm² Wire cross-section stranded, max. 6 mm² Wire cross-section stranded with wire-end ferrules, min. 0.2 mm² Wire cross-section stranded with wire-end ferrules, max. 4 mm² Wire cross-section stranded with wire-end ferrules, max. 10 Stripping length 12 mm Screw head Slotted	Rated voltage	700 V
Rated impulse voltage Overvoltage category III Contamination degree 3 Maximum power dissipation for nominal condition 1.02 W Connection data Connection principle Screw connection Connection position Lateral Connections 2 Number of terminals per level 2 Number of levels 1 Wire cross-section single-core (rigid) / stranded, min. 0.2 mm² Wire cross-section stranded with wire-end ferrules, min. Wire cross-section stranded with wire-end ferrules, min. Wire cross-section stranded with wire-end ferrules, min. Wire cross-section AWG, min. 22 Wire cross-section AWG, max. 10 Stripping length Slotted	Rated current	32 A
Overvoltage category Contamination degree 3 Maximum power dissipation for nominal condition 1.02 W Connection data Connection principle Screw connection Connection position Lateral Connections 2 Number of terminals per level 2 Number of levels 1 Wire cross-section single-core (rigid) / stranded, min. Wire cross-section single core (rigid)/stranded, max. 6 mm² Wire cross-section stranded, min. 0.2 mm² Wire cross-section stranded, min. 0.2 mm² Wire cross-section stranded with wire-end ferrules, min. Wire cross-section stranded with wire-end ferrules, min. Wire cross-section AWG, min. 22 Wire cross-section AWG, min. 22 Wire cross-section AWG, max. 10 Stripping length Slotted	Rated cross-section	4 mm²
Contamination degree 3 Maximum power dissipation for nominal condition 1.02 W Connection data Connection principle Screw connection Connections Lateral Connections 2 Number of terminals per level 2 Number of levels 1 Wire cross-section single-core (rigid) / stranded, min. 0.2 mm² Wire cross-section stranded with wire-end ferrules, min. 0.2 mm² Wire cross-section stranded with wire-end ferrules, min. 0.2 mm² Wire cross-section stranded with wire-end ferrules, min. 0.2 mm² Wire cross-section stranded with wire-end ferrules, min. 0.2 mm² Wire cross-section stranded with wire-end ferrules, min. 0.2 mm² Wire cross-section stranded with wire-end ferrules, max. 10 Stripping length 12 mm Screw head Slotted	Rated impulse voltage	6 kV
Maximum power dissipation for nominal condition Connection data Connection principle Screw connection Connection position Lateral Connections 2 Number of terminals per level Number of levels Wire cross-section single-core (rigid) / stranded, min. Vire cross-section stranded, min. Vire cross-section stranded, min. Vire cross-section stranded, max. 6 mm² Wire cross-section stranded with wire-end ferrules, min. Vire cross-section stranded with wire-end ferrules, max. Wire cross-section AWG, min. 22 Wire cross-section AWG, max. 10 Stripping length Screw head Screw connection 1.02 W 1.02 W 1.02 mm² 4 mm² 22 Vire cross-section AWG, max. 10	Overvoltage category	III
Connection data Connection principle Screw connection Connection position Lateral Connections 2 Number of terminals per level 2 Number of levels 1 Wire cross-section single-core (rigid) / stranded, min. 0.2 mm² Wire cross-section stranded with wire-end ferrules, min. 0.2 mm² Wire cross-section stranded with wire-end ferrules, min. 0.2 mm² Wire cross-section stranded with wire-end ferrules, max. 10 Stripping length 12 mm Screw head Slotted	Contamination degree	3
Connection principle Connection position Lateral Connections 2 Number of terminals per level 2 Number of levels 1 Wire cross-section single-core (rigid) / stranded, min. 0.2 mm² Wire cross-section single core (rigid)/stranded, max. 6 mm² Wire cross-section stranded, min. 0.2 mm² Wire cross-section stranded, min. 0.2 mm² Wire cross-section stranded with wire-end ferrules, min. Wire cross-section stranded with wire-end ferrules, max. Wire cross-section stranded with wire-end ferrules, max. Wire cross-section stranded with wire-end ferrules, max. Wire cross-section AWG, min. 22 Wire cross-section AWG, max. 10 Stripping length 12 mm Screw head Slotted	Maximum power dissipation for nominal condition	1.02 W
Connection position Connections 2 Number of terminals per level Number of levels 1 Wire cross-section single-core (rigid) / stranded, min. Wire cross-section single core (rigid)/stranded, max. Wire cross-section stranded, min. 0.2 mm² Wire cross-section stranded, min. 0.2 mm² Wire cross-section stranded, max. 6 mm² Wire cross-section stranded with wire-end ferrules, min. Wire cross-section stranded with wire-end ferrules, max. Wire cross-section stranded with wire-end ferrules, max. Ure cross-section AWG, min. 22 Wire cross-section AWG, max. 10 Stripping length 12 mm Screw head Slotted	Connection data	
Connections 2 Number of terminals per level 2 Number of levels 1 Wire cross-section single-core (rigid) / stranded, min. 0.2 mm² Wire cross-section single core (rigid)/stranded, max. 6 mm² Wire cross-section stranded, min. 0.2 mm² Wire cross-section stranded with wire-end ferrules, min. 0.2 mm² Wire cross-section stranded with wire-end ferrules, max. 4 mm² Wire cross-section AWG, min. 22 Wire cross-section AWG, max. 10 Stripping length 12 mm Screw head Slotted	Connection principle	Screw connection
Number of terminals per level Number of levels 1 Wire cross-section single-core (rigid) / stranded, min. 0.2 mm² Wire cross-section single core (rigid)/stranded, max. 6 mm² Wire cross-section stranded, min. 0.2 mm² Wire cross-section stranded, max. 6 mm² Wire cross-section stranded with wire-end ferrules, min. 0.2 mm² Wire cross-section stranded with wire-end ferrules, max. 4 mm² Wire cross-section AWG, min. 22 Wire cross-section AWG, max. 10 Stripping length 12 mm Screw head Slotted	Connection position	Lateral
Number of levels 1 Wire cross-section single-core (rigid) / stranded, min. 0.2 mm² Wire cross-section single core (rigid)/stranded, max. 6 mm² Wire cross-section stranded, min. 0.2 mm² Wire cross-section stranded, max. 6 mm² Wire cross-section stranded with wire-end ferrules, min. 0.2 mm² Wire cross-section stranded with wire-end ferrules, max. 4 mm² Wire cross-section AWG, min. 22 Wire cross-section AWG, max. 10 Stripping length 12 mm Screw head Slotted	Connections	2
Wire cross-section single-core (rigid) / stranded, min. 0.2 mm² Wire cross-section single core (rigid)/stranded, max. 6 mm² Wire cross-section stranded, min. 0.2 mm² Wire cross-section stranded, max. 6 mm² Wire cross-section stranded with wire-end ferrules, min. 0.2 mm² Wire cross-section stranded with wire-end ferrules, max. 4 mm² Wire cross-section AWG, min. 22 Wire cross-section AWG, max. 10 Stripping length 12 mm Screw head Slotted	Number of terminals per level	2
Wire cross-section stranded, min. Wire cross-section stranded, min. Wire cross-section stranded, max. Wire cross-section stranded with wire-end ferrules, min. Wire cross-section stranded with wire-end ferrules, max. Wire cross-section stranded with wire-end ferrules, max. Wire cross-section AWG, min. 22 Wire cross-section AWG, max. 10 Stripping length 12 mm Screw head Slotted	Number of levels	1
Wire cross-section stranded, min. Wire cross-section stranded max. Wire cross-section stranded with wire-end ferrules, min. Wire cross-section stranded with wire-end ferrules, max. Wire cross-section stranded with wire-end ferrules, max. Wire cross-section AWG, min. 22 Wire cross-section AWG, max. 10 Stripping length 12 mm Screw head Slotted	Wire cross-section single-core (rigid) / stranded, min.	0.2 mm ²
Wire cross-section stranded, max. Wire cross-section stranded with wire-end ferrules, min. Wire cross-section stranded with wire-end ferrules, max. Wire cross-section AWG, min. Wire cross-section AWG, max. 10 Stripping length Screw head Slotted	Wire cross-section single core (rigid)/stranded, max.	6 mm²
Wire cross-section stranded with wire-end ferrules, min. Wire cross-section stranded with wire-end ferrules, max. Wire cross-section AWG, min. 22 Wire cross-section AWG, max. 10 Stripping length 12 mm Screw head Slotted	Wire cross-section stranded, min.	0.2 mm ²
min. Wire cross-section stranded with wire-end ferrules, max. Wire cross-section AWG, min. 22 Wire cross-section AWG, max. 10 Stripping length 12 mm Screw head Slotted	Wire cross-section stranded, max.	6 mm²
max.4 mm²Wire cross-section AWG, min.22Wire cross-section AWG, max.10Stripping length12 mmScrew headSlotted	·	0.2 mm ²
Wire cross-section AWG, max. 10 Stripping length 12 mm Screw head Slotted		4 mm ²
Stripping length 12 mm Screw head Slotted	Wire cross-section AWG, min.	22
Screw head Slotted	Wire cross-section AWG, max.	10
	Stripping length	12 mm
Screw threading M 3	Screw head	Slotted
	Screw threading	M 3
Tightening torque, min. 0.5 Nm	Tightening torque, min.	0.5 Nm
Tightening torque, max. 1 Nm	Tightening torque, max.	1 Nm





Technical data	
Materials	
Insulation housing	Polyamide 6.6
Flammability class UL 94	V-2
Working temperature, min.	-40 °C
Working temperature, max.	105 °C
Further technical data	
Mounting type	Mounting face
Gauge plug acc. to EN 60 947-1	A4
Number of cross-connection channels	1
End plate required	✓
Number of test pick-off options	1
Environmental Product Compliance	
REACH Conform	yes
REACH Candidate Substance Note	No
RoHS Conform	yes







Approvals		
Standards and regulations		
EAC approval	TR ZU 004/2011	
EAC approval granted	yes	





Media

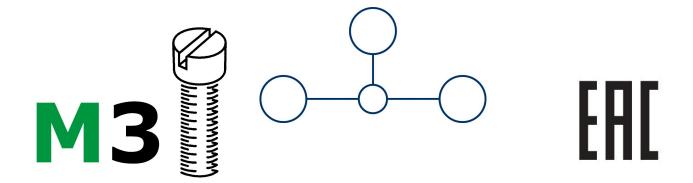

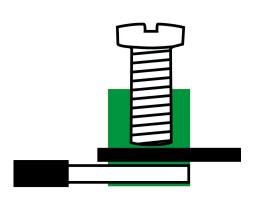





Accessories

Cover



Cover, Length: 24 mm, Width: 24 mm, Colour: Yellow

Article number	Article name	GTIN (EAN)	Packaging unit
<u>2494.0</u>	AD 4/24/B/E YE	4044211052959	50 ST



Cover, Length: 24 mm, Width: 24 mm, Colour: Yellow

Article number	Article name	GTIN (EAN)	Packaging unit
2011.0	AD 4/24/B YE	4044211048143	50 ST



Cover, Length: 24 mm, Width: 20 mm, Colour: Yellow

Article number	Article name	GTIN (EAN)	unit
2493.0	AD 4/24/B/E YE	4044211052942	50 ST



Cover, Length: 26.5 mm, Width: 6 mm, Colour: Yellow

Article number	Article name	GTIN (EAN)	Packaging unit
2953.0	AD 1/6/B YE	4044211056810	50 ST



Cover, Length: 26.5 mm, Width: 6 mm, Colour: White

Article number	Article name	GTIN (EAN)	Packaging unit
2965.0	AD 1/6 WH	4044211056940	50 ST



Cover, Length: 24 mm, Width: 20 mm, Colour: Yellow

Article number	Article name	GTIN (EAN)	Packaging unit
2079.0	AD 4/24/B YE	4044211048877	50 ST

Insulated external cross-connector

1388.5 KBL 2,5-4-D BU





External insulated cross-connector, No. of poles: 3, Mounting type: Plug in, Width: 16.9 mm, Rated current: 27 A; Colour: Yellow

Article number	Article name	GTIN (EAN)	Packaging unit
2065.0	AQI 3/6/17 YE	4044211048716	50 ST



External insulated cross-connector, No. of poles: 10, Mounting type: Plug in, Width: 59.6 mm, Rated current: 27 A; Colour: Yellow

Article number	Article name	GTIN (EAN)	Packaging unit
2143.0	AQI 10/6/17 YE	4044211049645	10 ST



External insulated cross-connector, No. of poles: 4, Mounting type: Plug in, Width: 23 mm, Rated current: 27 A; Colour: Yellow

Article number	Article name	GTIN (EAN)	Packaging unit
2066.0	AQI 4/6/17 YE	4044211048723	50 ST



External insulated cross-connector, No. of poles: 2, Mounting type: Plug in, Width: 10.8 mm, Rated current: 27 A; Colour: Yellow

Article number	Article name	GTIN (EAN)	Packaging unit
2064.0	AQI 2/6/17 YE	4044211048709	50 ST

End support



End support, Mounting type: Mounting surface, Width: 8 mm, Colour: Beige

Article number	Article name	GTIN (EAN)	Packaging unit
2180.2	EH 4 BG	4044211050023	50

Cross-connector



Cross-connector, No. of poles: 3, Mounting type: Can be screwed on, Width: 17 mm, Rated cross-section: 4 mm², Colour: natural

Article number	Article name	GTIN (EAN)	Packaging unit
2020.0	Q 3	4044211048235	50 ST

1388.5 KBL 2,5-4-D BU



Cross-connector



Cross-connector, No. of poles: 2, Mounting type: Can be screwed on, Width: 10.9 mm, Rated cross-section: 4 mm², Colour: natural

Article number	Article name	GTIN (EAN)	Packaging unit
2019.0	Q 2	4044211048228	50 ST



Cross-connector, No. of poles: 4, Mounting type: Can be screwed on, Width: 23.1 mm, Rated cross-section: 4 mm², Colour: natural

Article number	Article name	GTIN (EAN)	Packaging unit
2021.0	Q 4	4044211048242	20 ST



Cross-connector, No. of poles: 10, Mounting type: Can be screwed on, Width: 59.7 mm, Rated cross-section: 4 mm², Colour: natural

Article number	Article name	GTIN (EAN)	Packaging unit
2022.0	Q 10	4044211048259	10 ST

Insulated cross-connector



Insulated cross-connector, No. of poles: 4, Mounting type: Can be screwed on, Width: 21.9 mm, Colour: Yellow

Article number	Article name	GTIN (EAN)	Packaging unit
2742.2	QI 4 YE	4044211054823	20 ST



Insulated cross-connector, No. of poles: 10, Mounting type: Can be screwed on, Width: 59.7 mm, Colour: Yellow

Article number	Article name	GTIN (EAN)	Packaging unit
2743.2	QI 10 YE	4044211054830	10 ST



Insulated cross-connector, No. of poles: 2, Mounting type: Can be screwed on, Width: 10.4 mm, Colour: Yellow

Article number	Article name	GTIN (EAN)	Packaging unit
<u>2740.2</u>	QI 2 YE	4044211054809	50 ST





Insulated cross-connector



Insulated cross-connector, No. of poles: 3, Mounting type: Can be screwed on, Width: 16.5 mm, Colour: Yellow

Article number	Article name	GTIN (EAN)	Packaging unit
2741.2	QI 3 YE	4044211054816	50 ST

Quick marking



Terminal marker / Pocket Maxicard, Length: 5 mm, Width: 6 mm, Colour: White

Article number	Article name	GTIN (EAN)	Packaging unit
4702.7	PMC SB 6/50 WH	4044211089986	500 ST

Screwdriver

Screwdriver with bare blade, Colour: Black-grey



Article number	Article name	GTIN (EAN)	Packaging unit
<u>1086.0</u>	SDB 0,6x3,5	4044211014797	1 ST