

12mm x 7.5mm Family Datasheet Rev 1.1 - 01/04/21

CoreLED P/N 11003 (Square)


- 5H x 5V Square
- Compatible with following LED products
 - o Osram Oslon 1010
 - Nichia E17
 - o Samsung 101B
 - Other LED packages may be compatible (Contact CoreLed Engineering for requests)



The SMR product family is a series of vacuum metallized high temperature polymer mini-reflectors that attach directly to PCB using standard reflow. These components achieve high light collection efficiency, a variety of engineered beam patterns, and are supplied for high volume pick and place electronics assembly.

Key Features:

- o Optical reflector reflow mounted at the same time as LED assembly
- Supplied in tape and reel
- o Increased control of light output
- \circ Precision alignment (within ± 0.1 mm)
- o Family of optical beam patterns that will work using IR reflow
- $\circ \quad \text{Reflow solder lead frame integrated into reflector assembly}$
- o Standard pick and place equipment
- o Manufactured without the need for additional components to attach the optics







12mm x 7.5mm Family Datasheet Rev 1.1 - 01/04/21


Emitted Pattern Profile

Nichia E17 (Simulated)

IES NEMA Type	5H x 5V
Maximum Candela	141
Maximum Candela Angle	-9.0H -1.0V
Horizontal Beam Angle (50%)	60.6
Vertical Beam Angle (50%)	56.5
Horizontal Field Angle (10%)	83.1
Vertical Field Angle (10%)	81.8
Total Rated Lamp Lumens	150
Total Efficiency	86.53%







FLOOD/CANDELA VERSUS ANGLE


56 DEGREE FWHM


IES files and Raytrace models are available upon request from CoreLed Engineering.



12mm x 7.5mm Family Datasheet Rev 1.1 - 01/04/21

Mechanical Profile

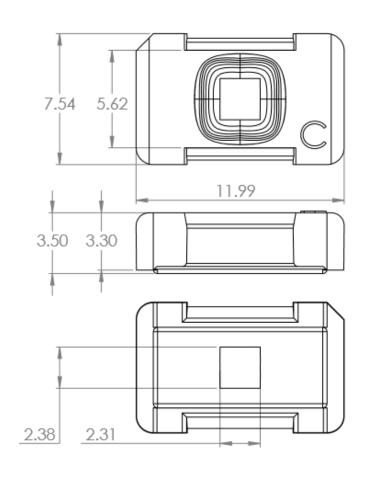

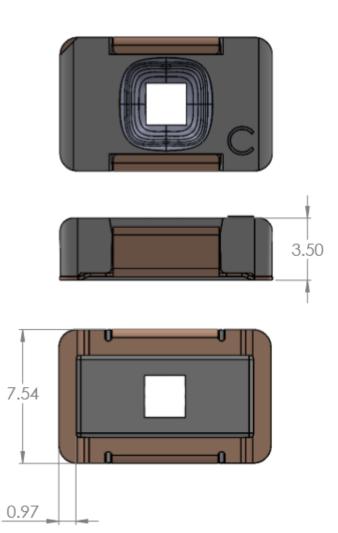

Mechanical design features without solder clip


Mechanical design features with solder clip

CAD files available upon request from CoreLed Engineering



12mm x 7.5mm Family Datasheet Rev 1.1 - 01/04/21

Reflow Profile

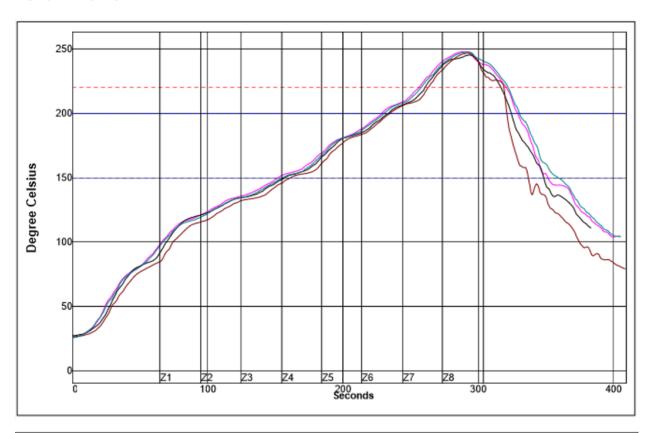

Setpoints (Degree Celsius)									
Zone	1	2	3	4	5	6	7	8	
Тор	125	148	152	173	210	235	268	257	
Bottom	125	148	152	173	210	235	268	257	
Conveyor Speed	50.	50.0 cm/min							


Example Reflow profile used for testing of SMR units by CoreLed




12mm x 7.5mm Family Datasheet Rev 1.1 - 01/04/21

Solder Pad drawing

Dimensions are in mm

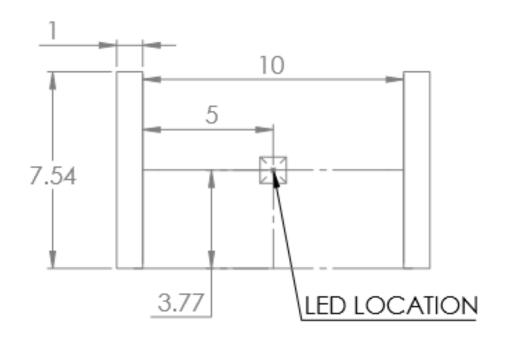


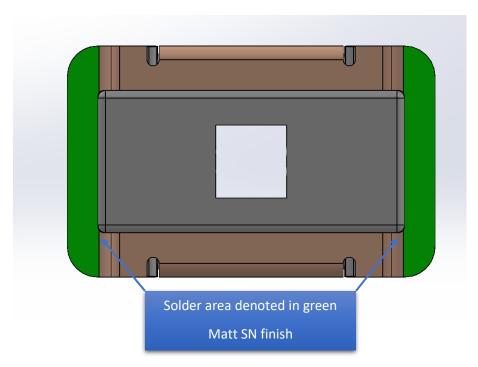



12mm x 7.5mm Family Datasheet Rev 1.1 - 01/04/21

Packaging

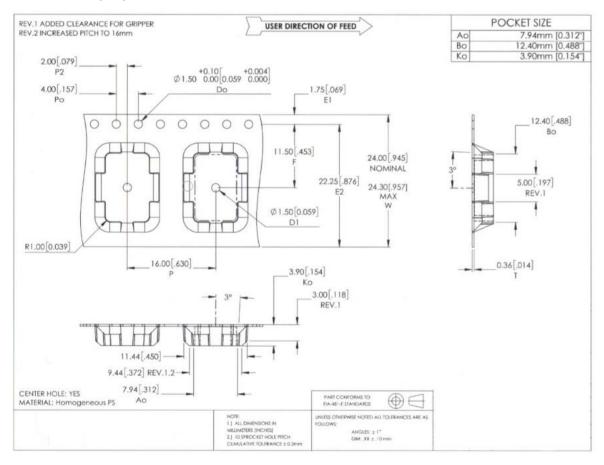

Packaging information for tape and reel delivery.



