
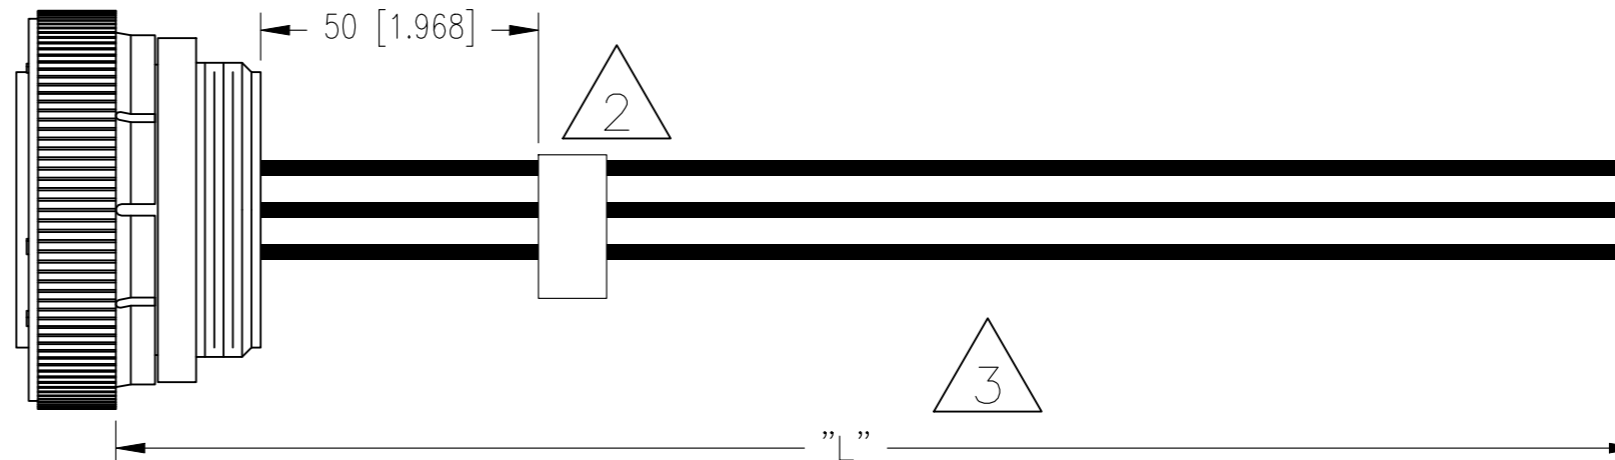


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	INITIAL RELEASE	09NOV2021	GSK	JDA

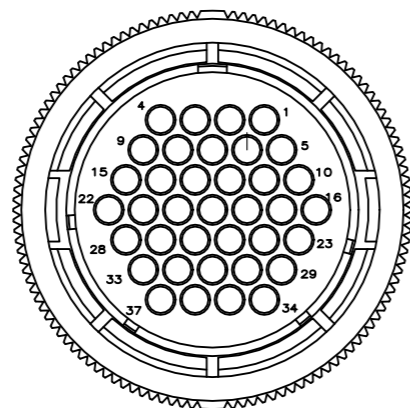

NOTES:

1. OVERALL INSULATION CRIMP DIAMETER, INCLUDING CRIMP BARREL, MUST NOT EXCEED .125 [3.18]

2 LABEL LOCATED APPROXIMATELY WHERE SHOWN. LABEL INFORMATION AS FOLLOWS:

2387129-X	TE P/N
REV B	CUST REV
TE/MEXICO	MANUFACTURER NAME/COUNTRY OF ORIGIN
MM/DD/YY	DATE CODE

4. TOLERANCES PER IPC STANDARD:  
IPC-A-620A

Metric	
<0.3 m	+25mm -0mm
>0.3 m - 1.5m	+50mm -0mm
>1.5 m - 3m	+100mm -0mm
>3 m - 7.5m	+150mm -0mm
>7.5m	+5% -0%

- 5. HARNESS SHALL BE SHIPPED IN SEALED PLASTIC BAG.
- 6. CONTINUITY ELECTRICAL TEST MUST BE PERFORMED.
- 7. WIRE 18 AWG

3 "L" REPRESENTS THE LENGTH OF THE WIRE USED FOR THE LEADS.

TE PN	LENGTH "L"
2387129-1	0.5M
2387129-2	1.0M
2387129-3	2.0M

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN SATHISH KUMAR G 09NOV2021	TE Connectivity		
DIMENSIONS: mm [INCHES]		CHK JUAN AVILA 09NOV2021			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD JUAN AVILA 09NOV2021	CPC PLUG CONNECTOR CABLE, STD SEX, SERIES 1, 23-37		
		PRODUCT SPEC	RESTRICTED TO		
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO
MATERIAL		WEIGHT	A3	00779	C-2387129
FINISH		CUSTOMER DRAWING		SCALE	SHEET
				NTS	1 OF 1
				REV	B