
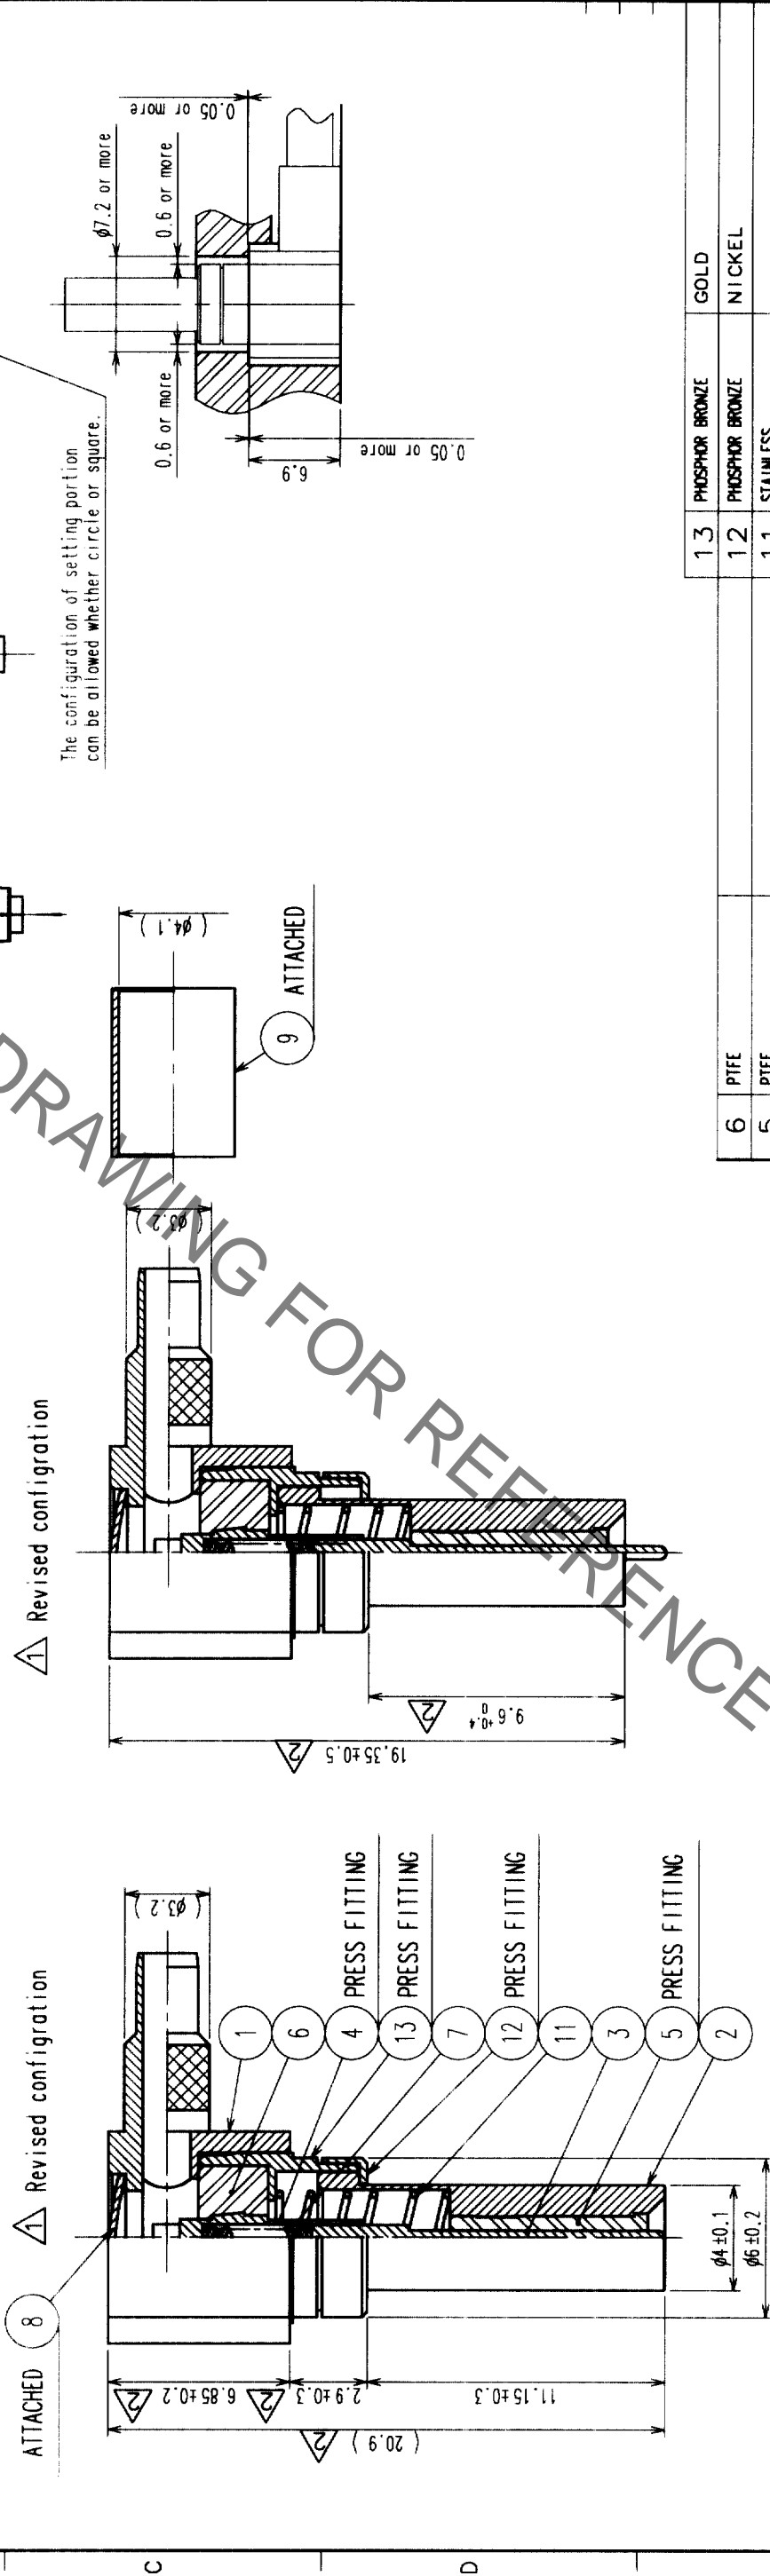


5	6	7	8	9	10
COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	DATE
5	RE-J-01930	K.HIDA	K.K	'02.9.19	
5	RE-J-01936	K.HIDA	K.K	'02.9.24	
1	RE-J-02077	T.M	K	'03.9.19	

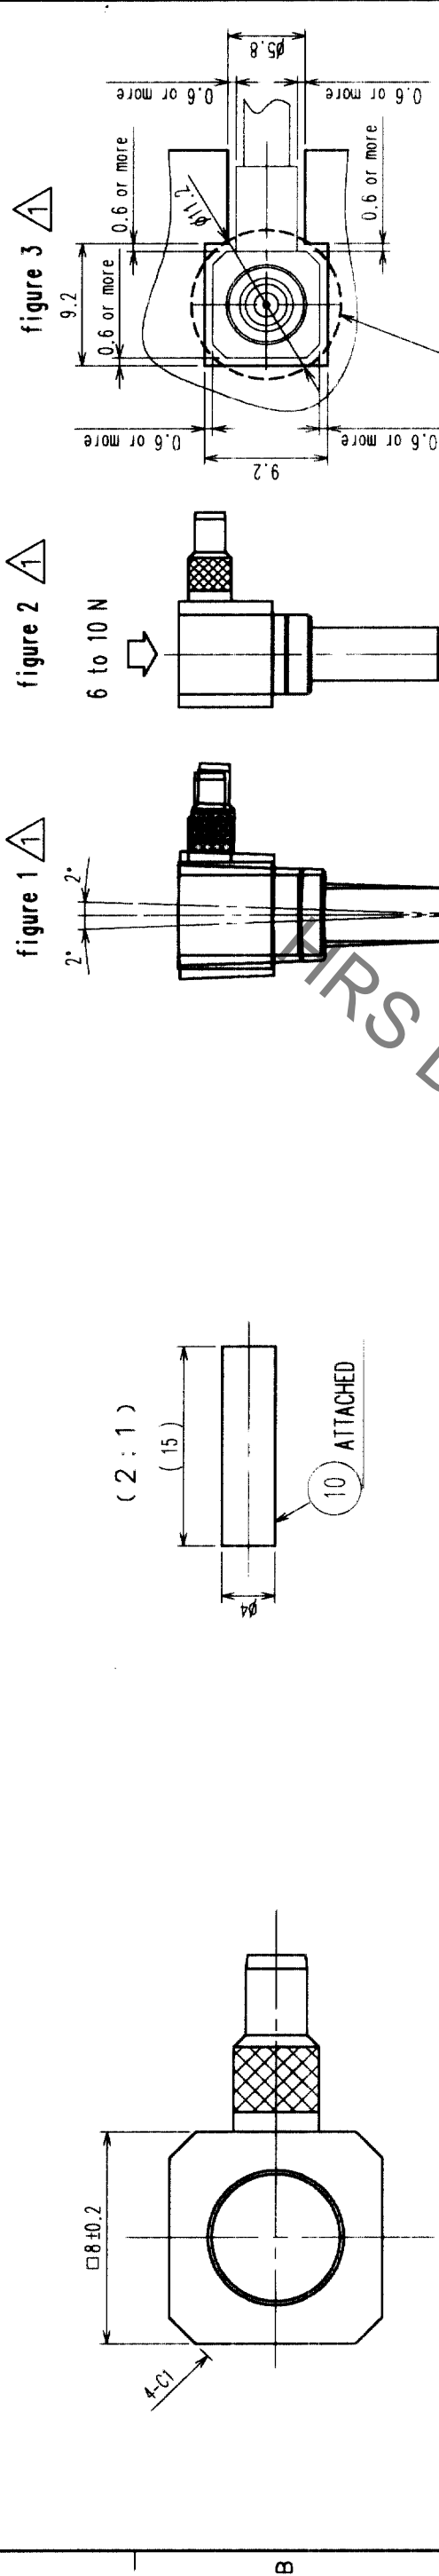

NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
6	PTFE		13	PHOSPHOR BRONZE	GOLD
5	PTFE		12	PHOSPHOR BRONZE	NICKEL
4	BERYLLIUM COPPER	GOLD	11	STAINLESS	
3	PHOSPHOR BRONZE	GOLD	10	POLYOLEFIN	HEAT SHRINK TUBING
2	PHOSPHOR BRONZE	GOLD	9	BRONZE	NICKEL
1	PHOSPHOR BRONZE	NICKEL	8	BRONZE	NICKEL
			7	STAINLESS	

UNMATED CONDITION

MATED CONDITION

NOTE 1. Mating angle must be less than ±2 degree. (refer to figure 1)
 2. This connector must be pushed on the receptacle (MS-156) with 6 to 10 N. (refer to figure 2)
 If the mating force become 10N or more, there is possibility to have some defect.
 3. This connector must be set to jig as figure 3 (recommended setting configuration).

TO	RFD	APPROVED	RELEASED
		K.HIDA	Y.MIYAKE

DRAWING NO.	EDC3-180288
PART NO.	MS-156-C(LP)-1
CODE NO.	CL358-0173-0