


USD Disconnect Blocks Nonfused, Disconnects



ND-1 Series

- 240VAC; 60A ratings
- Available in both 2 and 3 pole versions for both single and three phase systems
- Compact one-piece thermoplastic housing is rated to 150°C
- Box connector or quick-connect terminations available on load side. Box connector standard on line side
- Body of disconnect can be mounted enabling disconnect head (pull-out) to interlock with door to insure power is off when door is open.
- U.L. Recognized file E61416
- CSA Certified file LR37129

NEW!

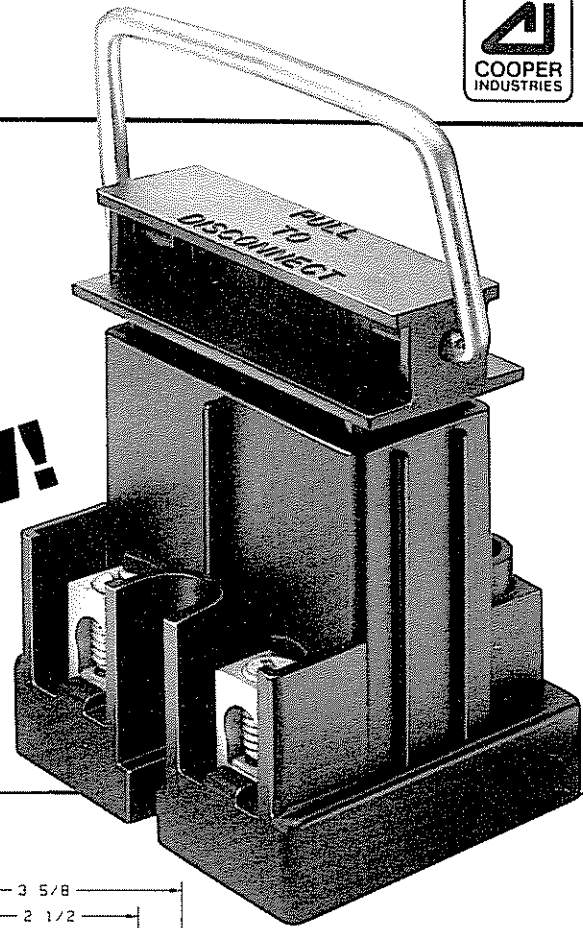

Part Numbering System

ND-1260	□	□	□
Model Number	No. of Poles	Line Side Connections	Load Side Connections
	2	C=Box Connection	C=Box Connection
	3		Q=(4) 250" Quick Connects

