VIEW ON MATING SIDE

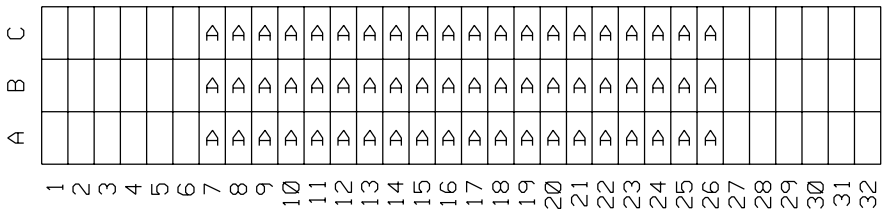

A = 60 STANDARD CONTACTS L=4,5

Marking	Standard
Performance level	G2/0 = Contact area level2 / Termination tin
Flux proof	no
Fixing clip	no
Dimensions	SD-85048-0002 sht.1
Technical Data	PS-85042-0001

A	G2/0	a7-26 b7-26 c7-26
Contact symbol	Perform. level	Contact position number

ECN 2478 first release	REVISIONS	A
LTR	FOR PREVIOUS REVISIONS SEE MRI LIST	

UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ±2°

	INCH	METRIC
3 PLACE	± .	±
2 PLACE	± .	±
1 PLACE	± .	±

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DESIGN DIMENSION ☐ MM ☐ IN.

EQUIVALENT DIMENSION ☐ MM ☐ IN.

IF TWO DIMENSIONS ARE SHOWN THE UPPER IS THE DESIGN DIMENSION, LOWER IS SECONDARY

DRWG BY KN	SIGN	
CHK'D BY Ca	SIGN	
APP'D BY JB	SIGN	
SCALE		

REVISE ONLY ON CAD SYSTEM | SH. | REV.

CADCAM PROJECT NAME s8504801 s11

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. & SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

TITLE

60 pos. female connector acc. DIN 41612, style M contacts arrangement

MOLEX EUROPE

SHEET NO. 1 OF 1

DATE 97/05/26

PART NO. 85048-0115

DWG NO. SD-85048-0115

SIZE A