




1433 AS SHOWN

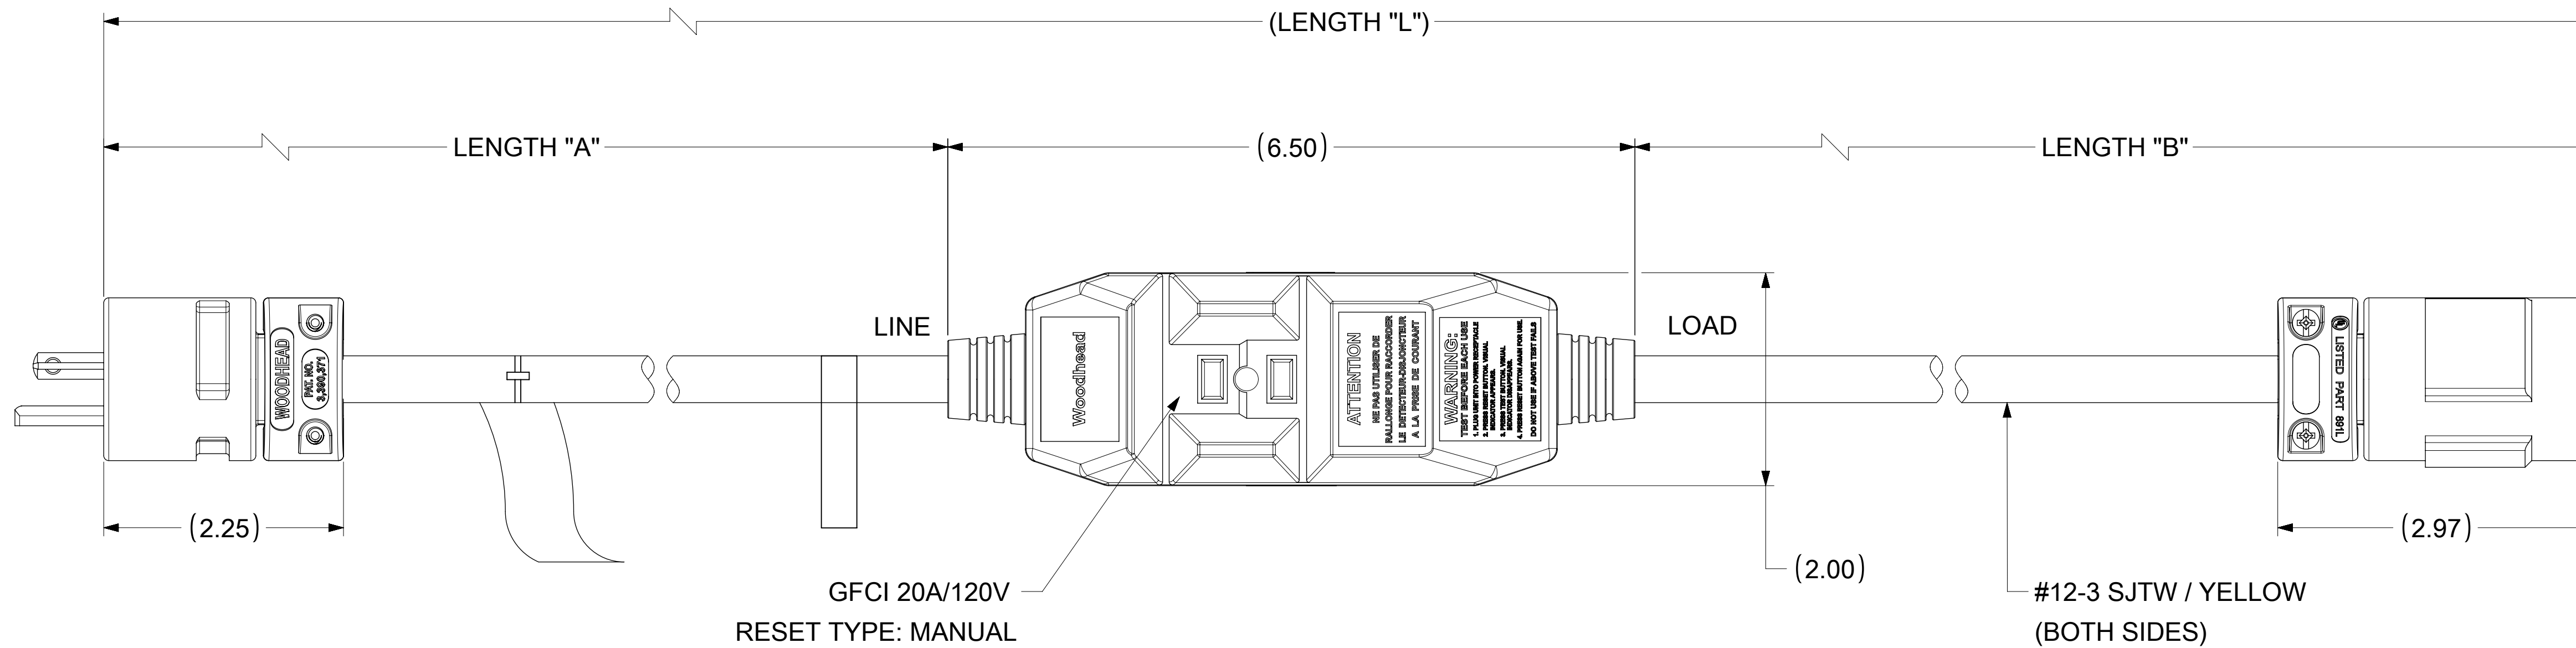

1533 AS SHOWN

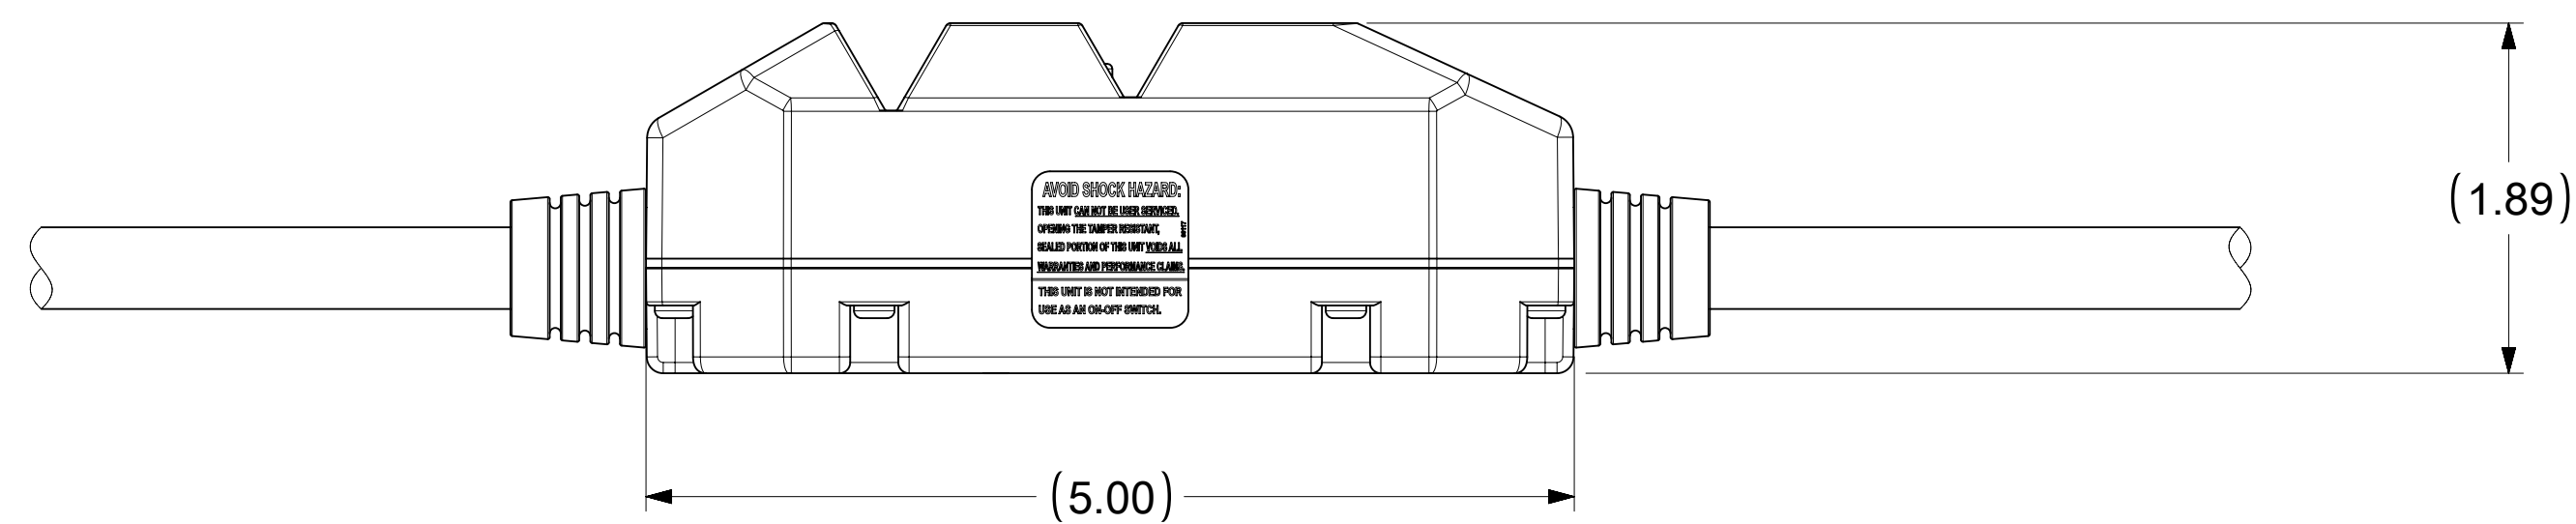

TECHNICAL

LISTED: UL & CSA
 RATED SUPPLY VOLTAGE: 120VAC
 RATED CURRENT: UP TO 20 AMPS
 RESET TYPE: MANUAL
 OPERATING FREQUENCY: 60 Hz
 TYPE: CLASS A
 GROUND TRIP CURRENT: 4-6 mA
 OVERLOAD CURRENT: 120 AMP 125 VAC
 INSULATION VOLTAGE: 1,500 VRMS - 1 MINUTE
 ENDURANCE OPERATIONS: 3000 OPERATIONS
 GFCI ENCLOSURE: NEMA 3R

MATERIAL NUMBER	ENGINEERING NUMBER	LENGTH "A"	LENGTH "B"	LENGTH "L"	PLUG	CONNECTOR
1301530259	20051-50	1 FT ± .5 IN.	49 FT ± 4 IN.	50 FT 6.5 IN ± 4.5 IN.	1433	1533

FUNCTIONAL SYMBOLS FA = 0 FC = 0 FD = 0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC: NEW SALES DRAWINGS CREATED			
	DIMENSION UNITS INCH	SCALE NTS	GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± °			
DIVISIONAL SYMBOLS	4 PLACES ±		EC NO: 679759		20A/120V INLINE GFCI W/ NEMA 5-20 50FT	
	3 PLACES ±		DRWN: PPURSUTANDEL 2021/09/20		PRODUCT CUSTOMER DRAWING	
2 PLACES ±		CHK'D: PPURSUTANDEL 2021/11/22		DOCUMENT NUMBER		
1 PLACE ±		APPR: HKNEELAND 2021/12/06		DOC TYPE		
0 PLACES ±		INITIAL REVISION:		DOC PART		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRWN: PPURSUTANDEL 2021/09/20		REVISION		
THIRD ANGLE PROJECTION		APPR: HKNEELAND 2021/12/06		1301530259		
DRAWING		SERIES		PSD 000 A		
D-SIZE		130153		1 OF 1		
MATERIAL NUMBER		CUSTOMER		SEE TABLE GENERAL MARKET		
SHEET NUMBER				1 OF 1		