



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	H3	REVISED PER ECN-22-150900	22APR2022	RK	CSD

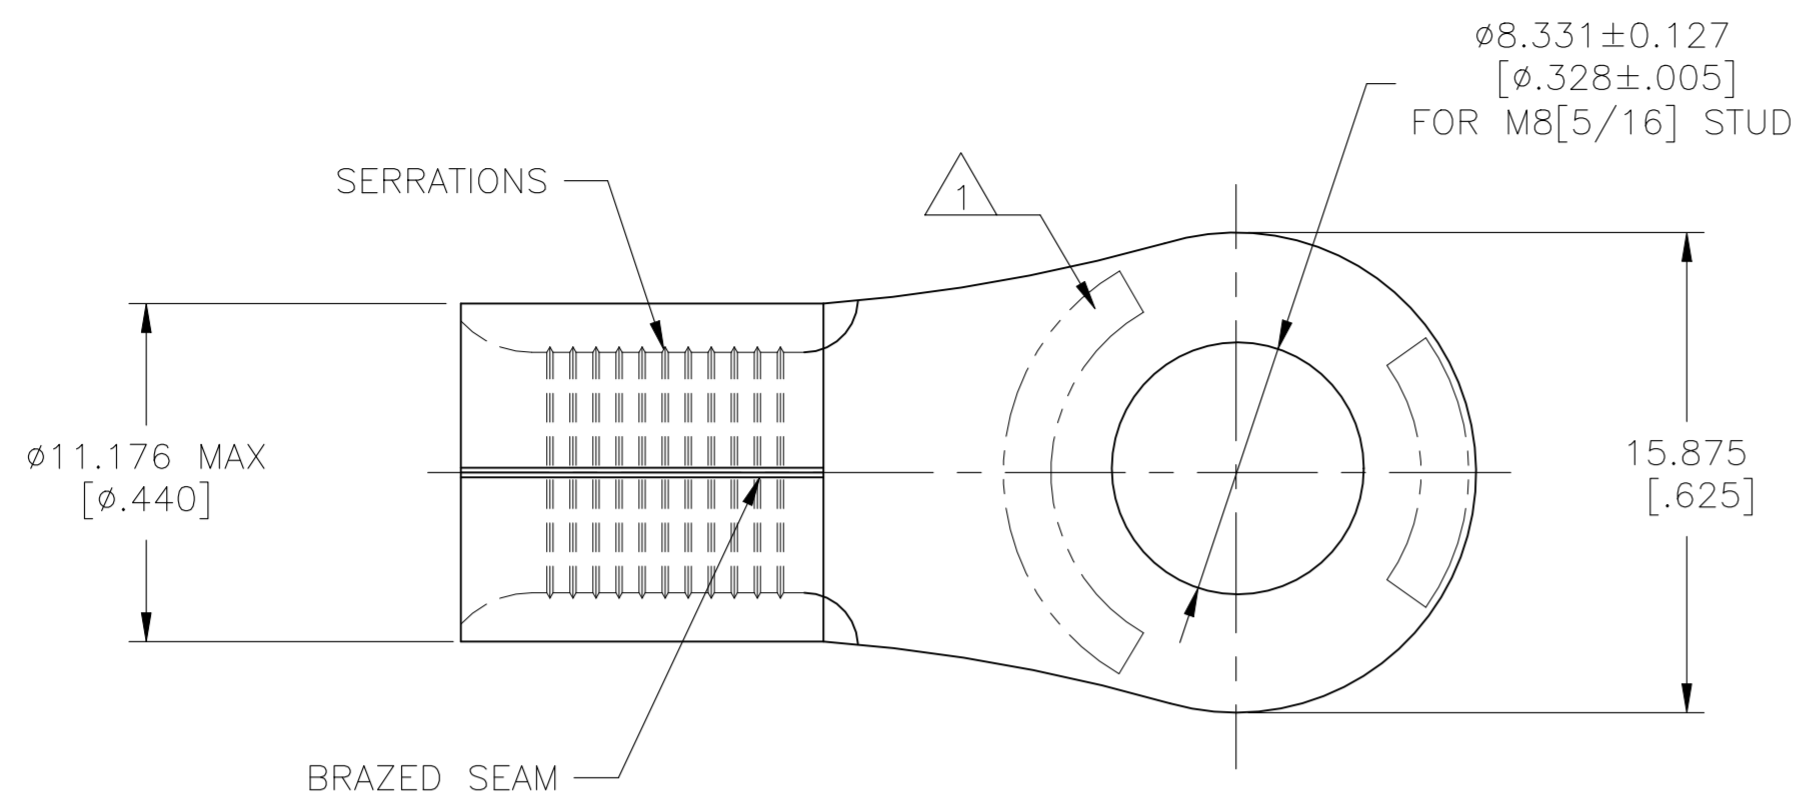

AMP WIRE RANGE	Listed
4 AWG SOLID OR STRANDED	4 AWG STRANDED

LR7189 Certified
4 AWG SOLID OR STRANDED

- STAMP AMP 4W* 40-50
LOCATED APPROX AS SHOWN
- UL 486 A-B

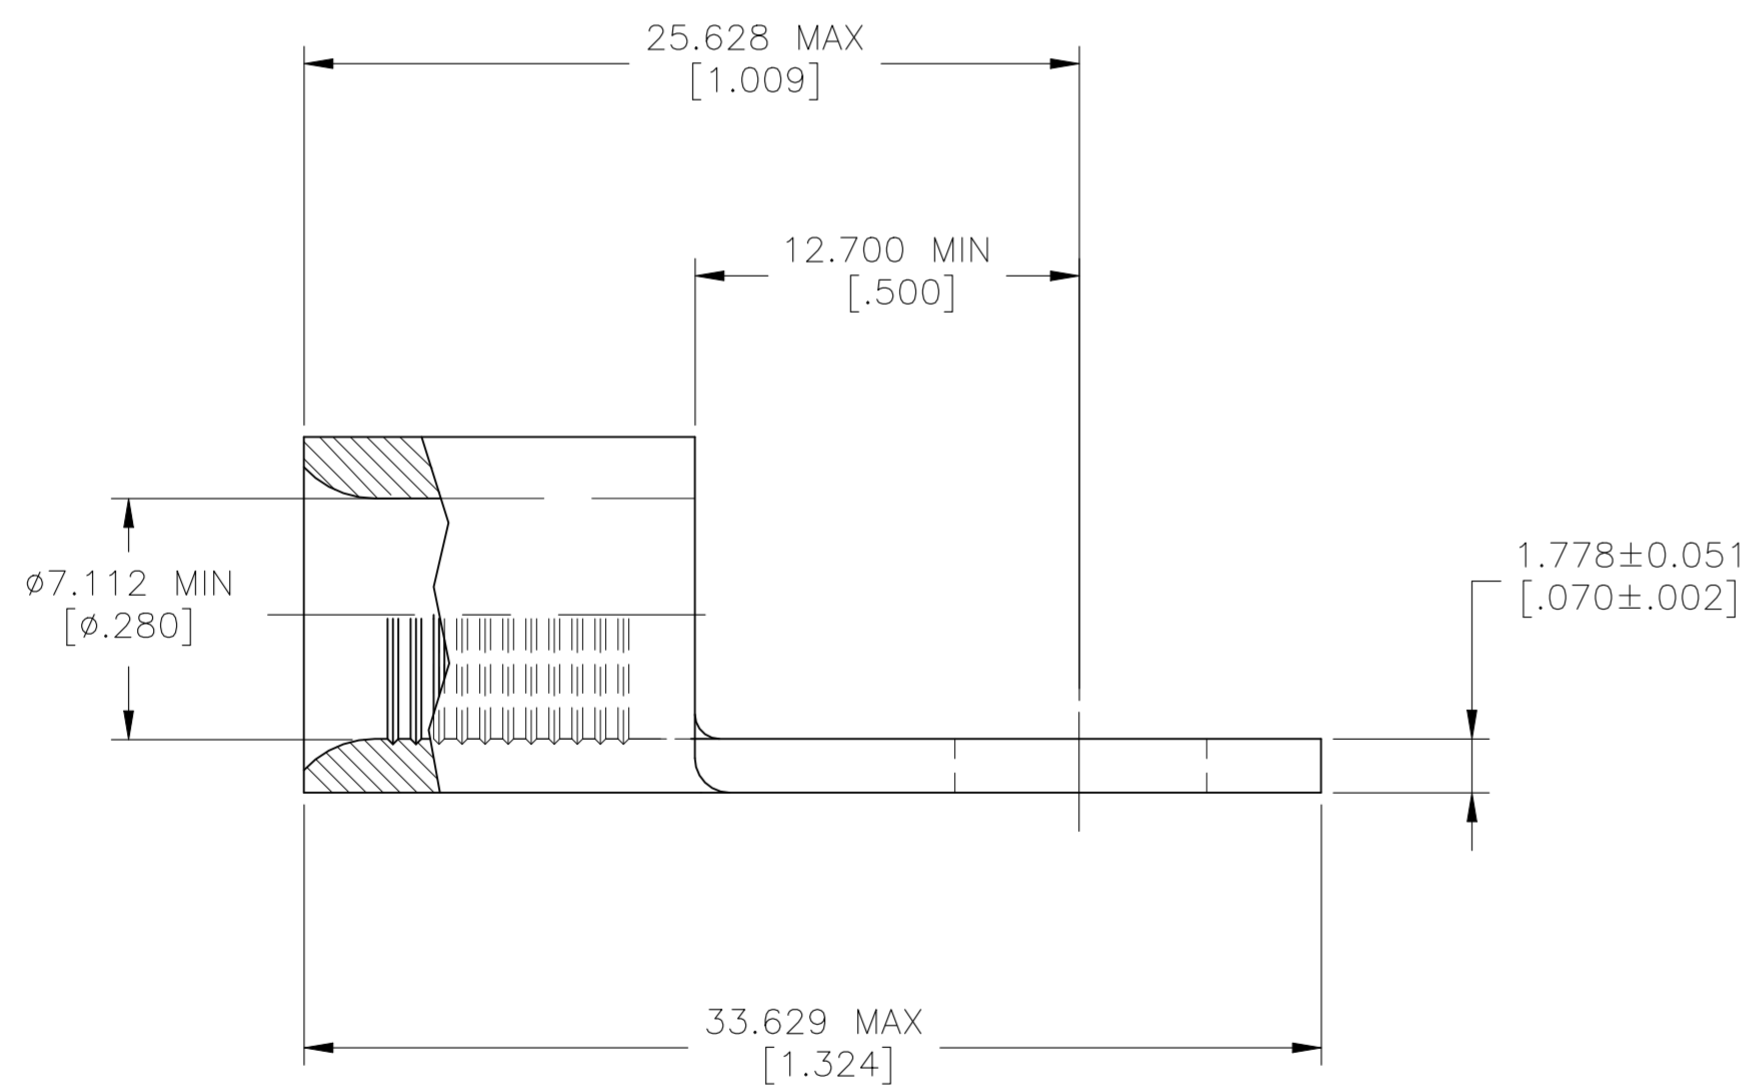

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 170° C[338°F] MAX
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: NOT APPLICABLE
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	WIRE CROSS SECTIONAL AREA RANGE: 16.8-26.7MM ² [33,100-52,600] CIR MILS SOLID OR STRANDED
FOR ORDER ENTRY	1-800-526-5142	

100	LOOSE PIECE	33115
QTY	PACKAGE TYPE	PART NUMBER
TE TE Connectivity		
NAME		TERMINAL, RING, TONGUE, SOLISTRAND™ 4 AWG
SIZE	CAGE CODE	DRAWING NO
A2	00779	C=33115
CUSTOMER DRAWING		RESTRICTED TO
SCALE 4:1		SHEET 1 OF 1
		REV H3