


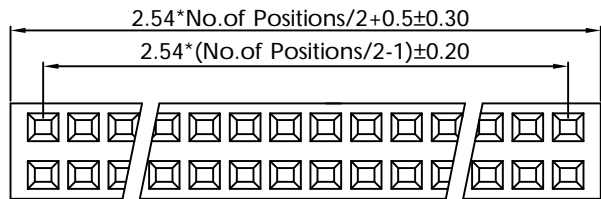


環保物料專用

RoHS compliant

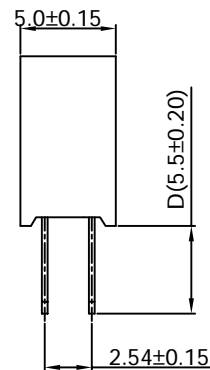

P.C.B. Hole Layout

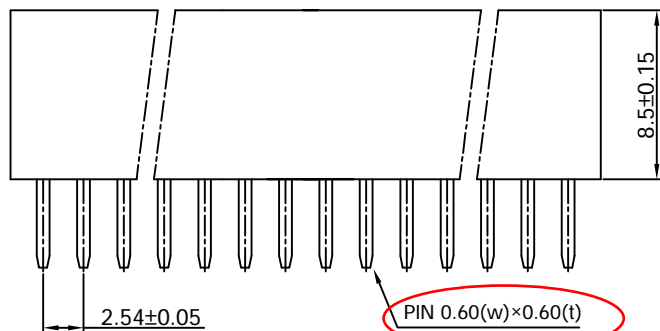

SPECIFICATIONS

- Current Rating :3 Amp
- Insulator Resistance :5000 Megohms Min.
- Contact Resistance :20 m ohms max.
- Dielectric Withstanding :AC 1000 V
- Operating Temperature :-40°C ~ +105°C
- Contact Material :Phosphor Bronze
- Insulator Material :Polyester, UL 94V-0
- Standard :P.B.T
- Finish :Tin, Gold or Duplex Plated
- Standard :Gold Flash all over

Note:
Duplex plating: Gold Plated on contact area, Tin on Solder area

Ordering Information

F201-SGP-D055-XX



DESCRIPTION(內容):
2.54mm Female Header 180°

DRAWN(製圖):
Tom Liu

CHECKED(確認):
Jack Wu

APPROVAL(核准):
Kane He

GENERAL TOLERANCE	
LINEAR	ANGLES
X.: ±0.30	X°: ±5.0°
X.X: ±0.20	X.X°: ±3.0°
X.XX: ±0.15	X.XX°: ±2.0°
X.XXX: ±0.10	X.XXX°: ±1.0°

REV: A/1
UNIT: mm
SHEET: 1/1


REV: 1, 2, 3, 4

DESCRIPTION	DATE
ORIGINAL	Aug-04-2018
Modify Terminal SPEC	OCT-25-2018

PART NO: F201-SGP-D055-XX
DWG NO (圖號): KWRD180804-015

A4

SCALE (比例): 1:XX



A

B

C

D

E