



Wimax Monoblock Ceramic Bandpass Filter

ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

Part Number: AM3285B1001



Electrical specifications

Center Frequency: 3285 MHz
Bandwidth: Fo +/- 25 MHz
Input / Output Impedance: 50 Ohms
Passband: 3272.5-3297.5 MHz
Passband Insertion Loss: 2 dB max
Passband Ripple: 0.5 dB max
Passband Return Loss: 18 dB min.
Rejection: 30 dB min @ 3075 MHz
Rejection 2: 10 dB min @ 3175 MHz
Rejection 3: 10 dB min @ 3395 MHz
Rejection 4: 28 dB min @ 3495 MHz
Power Handling: 1 W

Mechanical




Mounting Method: SMT
Dimensions: 10.6 x 6 x 3.9 mm

Environmental

Operating Temperature: -40°C to +85°C
Storage Temperature: -50°C to +90°C

This product is RoHs compliant.

Outline Drawing:

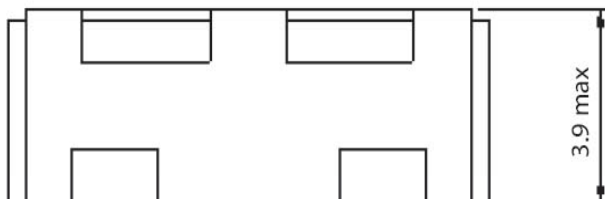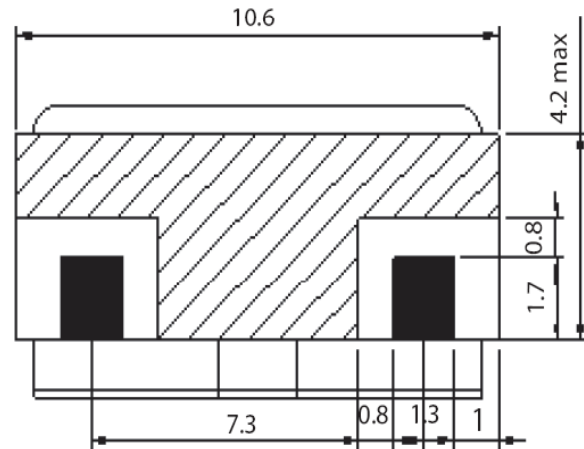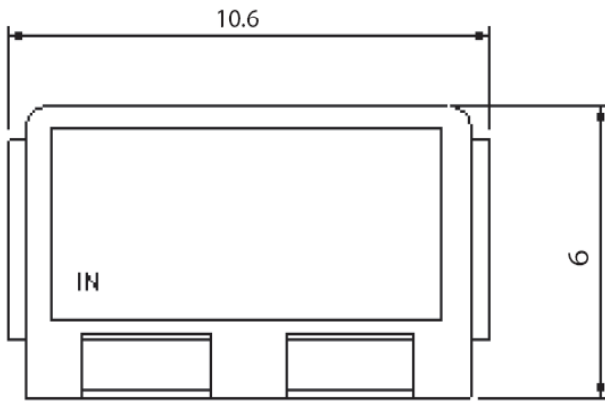

■ : I/O PORT

▨ : GROUND

TOLERANCE UNLESS

OTHERWISE SPECIFIED : ± 0.3

UNITS : mm



Wimax Monoblock Ceramic Bandpass Filter

ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

Part Number: AM3285B1001



Response Plot:

