


Rev : 1.0

Product Description

With the hearing aid function receiver, frequency response curve smooth, compact, high reliability

Mechanical Drawing

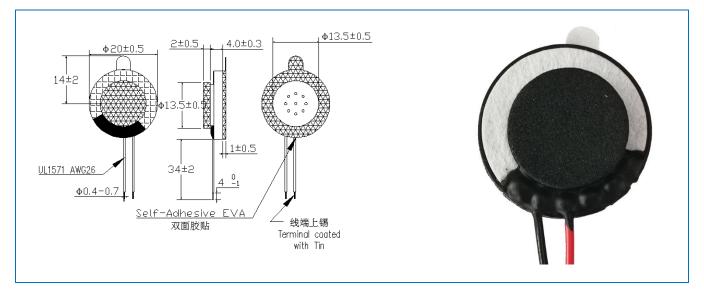

Specifications

ITEMS	DATA	UNIT	ITEMS	DATA	UNIT
Impedance	150	Ohm	Fo	/	Hz
Sensitivity	88	dB	Frequency Range	200-5K	Hz
THD	5	%	Weight	3.2	g
Rated Power	10	mW	Operating Temp	-20~55	°C
Max Power	20	mW			

Frequency Response Curve

