


REVISIONS				
P	LTR	DESCRIPTION	DATE	DMN APVD
B	REVISED PER	ECO-17-018523	19JAN2018	PHM CT

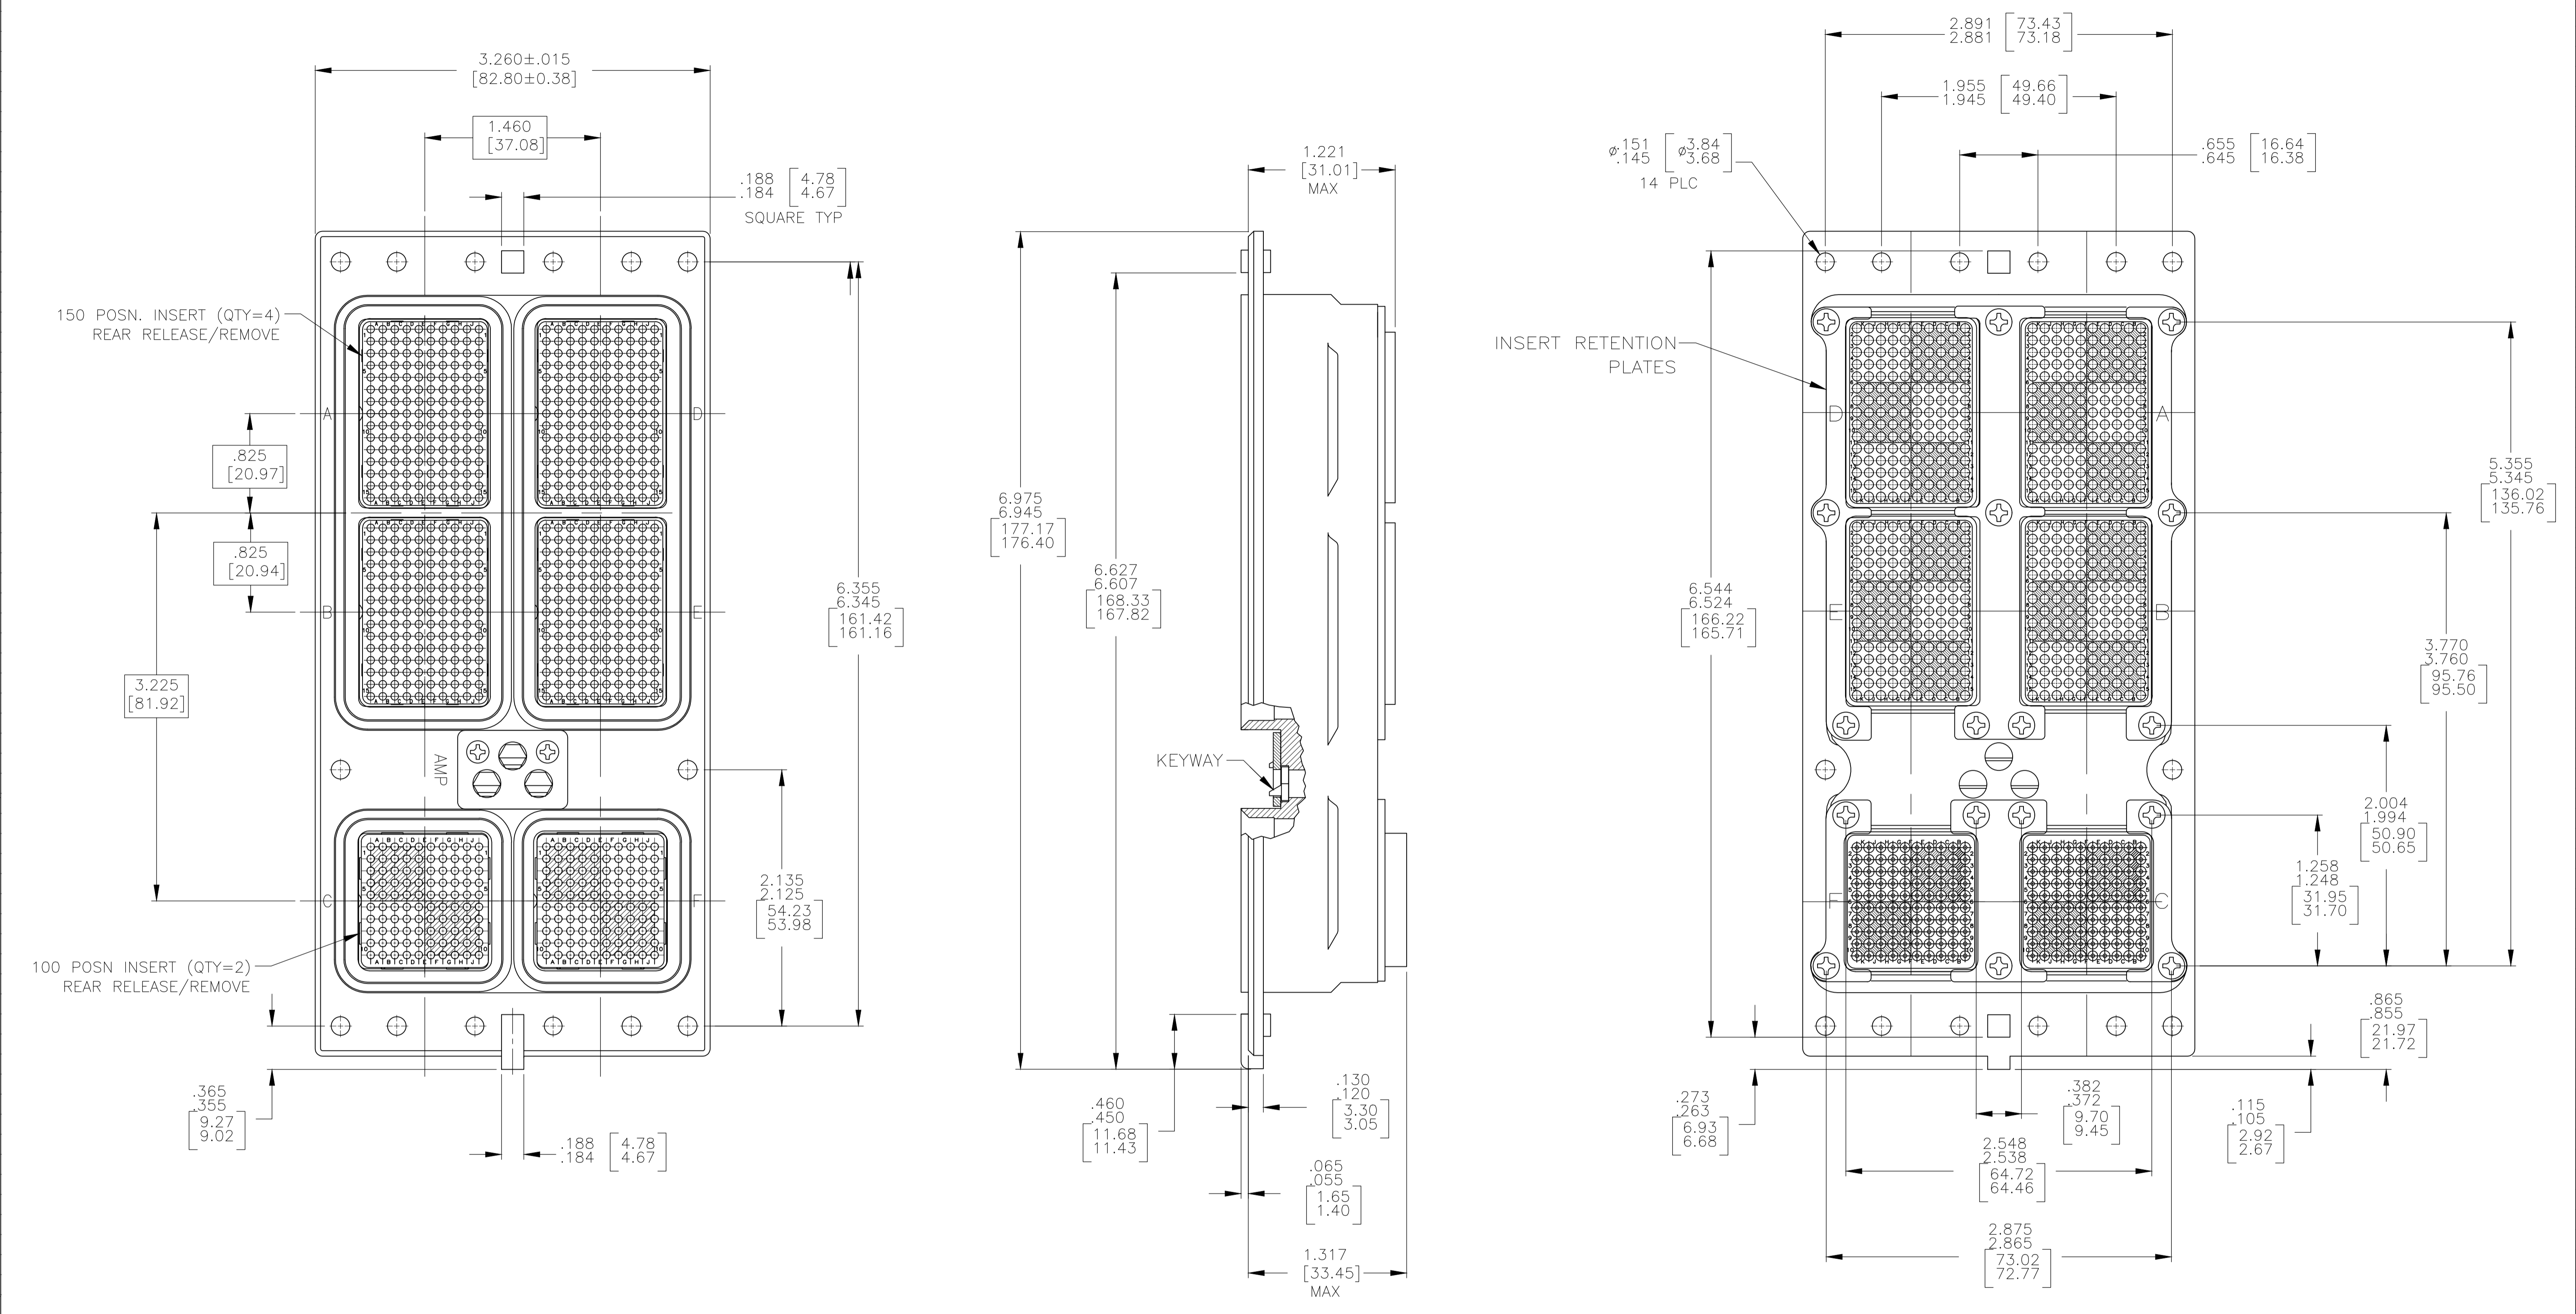

- CONNECTOR DIMENSIONS ARE PER ARINC 600 SPECIFICATION
- CONTACTS ARE NOT SUPPLIED WITH THIS CONNECTOR
- KEYING SHOWN IN POSITION "01" FOR REFERENCE ONLY. SEE TABLE FOR KEYING POSITION. FOR POSITION "00" KEYING SHIPPED UNASSEMBLED.
- DUST COVER (QTY=2) IS INSTALLED BEFORE SHIPPING (NOT SHOWN).

COMPONENT	MATERIAL	FINISH
SHELL	DIE CAST ALUMINUM PER ASTM-B-85	CHROMATE CONVERSION PER MIL-DTL-5541, CLASS 3, TYPE II.
RETENTION PLATES	ALUMINUM ALLOY PER ASTM-B-209	CHROMATE CONVERSION PER MIL-DTL-5541, CLASS 3, TYPE II.
SCREWS	STEEL OR STAINLESS STEEL	STAINLESS STEEL OR PASSIVATED
POLARIZING KEYS	ZINC ALLOY PER ASTM-B-86	-
POLARIZING KEY RETAINING PLATE	ALUMINUM ALLOY PER ASTM-B-209	BLUE ANODIZED PER MIL-A-8625
150 & 100 INSERTS	THERMOSET	-

"02"	1996228-1
KEYING POSITION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	0 PLC ± .005	1 PLC ± .005	2 PLC ± .005	3 PLC ± .005	4 PLC ± .005	ANGLES ± .005
MATERIAL SEE TABLE	FINISH SEE TABLE	WEIGHT 0	SIZE A1	CAGE CODE 00779	DRAWING NO. 1996228	RESTRICTED TO	SCALE 1:1 SHEET 1 OF 1 REV B

CUSTOMER DRAWING