PAR38 14W DIM. CORE LED SERIES









- Wet location rated for outdoor use
- Lightweight environmentally friendly construction
- U Full-face optic: maximizes distribution, minimizes glare
- High 75 LPW in Warm White
- Smooth dimming on existing dimmers
- U FL beam angle in Soft White & Warm White CCT

















\$261 Savings per lamp*














SUITABLE FOR ALL DIRECTIONAL APPLICATIONS

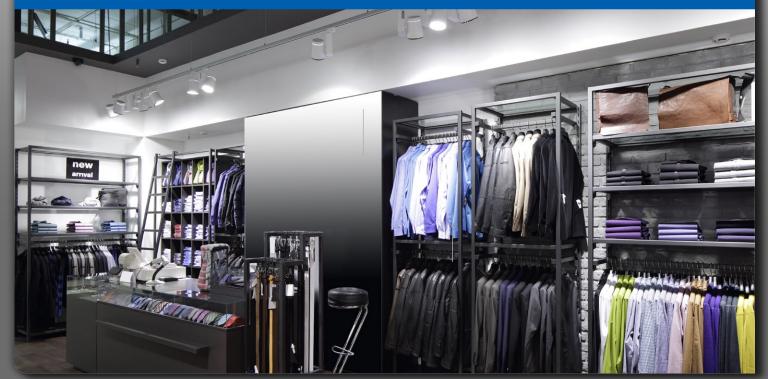


PAR38 14W DIM. CORE LED SERIES




ILLUMINANCE & CANDELA DISTRIBUTION

14PAR38DIM/830FL40



Diameter	Footcandles
2.2	211
4.4	53
6.6	23
8.7	13
10.9	8



Degree	Candela				
0	2000				
5	1924				
15	1302				
25	423				
35	97				
45	50				

For other CCT use the following multipliers: 2700K .95 $\,$

Base: **E26** Voltage: 120V **Dimmable:** Yes*** PF: 0.9

Lifetime: 25,000 hrs Weight: 0.44lb / 200g



SPECIFICATIONS

Model	Product	Power (W)	сст	CRI (typ.)	Lumens	LPW	Beam Angle	CBCP (cd)
14PAR38DIM/827FL40	57807	14	Soft White 2700K	80	1000	71	FL 40°	1900
14PAR38DIM/830FL40	57809	14	Warm White 3000K	80	1050	75	FL 40°	2000
14PAR38DIM/830FL40	57809	14	Warm White 3000K	80	1050	75	FL 40°	2000

^{*} Savings per lamp based on \$0.11 / kw energy cost, 12 hrs / day lamp usage, \$8 halogen with 1500-hr lifetime, \$25 LED with 25,000-hr lifetime

** Not intended for use in totally enclosed fixtures

**** List of tested dimmer switches available on website

**** Suitable for use in wet locations