


| CATALOG NUMBER | MATERIAL NUMBER | DIAMETER RANGE | | NOMINAL ROD DIAMETER | LENGTH "M" | LENGTH "B" | LENGTH "G" EYE CABLE THICKNESS REF. | COLOR CODE | APPROXIMATE BREAK STRENGTH* (LBS / N) | UL LISTED | CSA APPROVED | PRODUCT SELECTION NUMBER |
|----------------|-----------------|-----------------------|-----------------------|----------------------|---------------------------|-------------------------|-------------------------------------|------------|---------------------------------------|-----------|--------------|--------------------------|
| | | CONDUCTOR DIAMETER | ROPE** DIAMETER | | | | | | | | | |
| 36610 | 1300950272 | .19-.37 / 4.8-9.4 | .25-.65 / 6.4-16.5 | .43 / 10.9 | 24.00±2.50 / 609.6±63.5 | 10.00±1.00 / 254.0±25.4 | .218 / 5.54 | BLACK | 6500 / 28913 | NO | YES | PHS025 |
| 36612 | 1300950274 | .63-.87 / 16.0-22.1 | .75-1.10 / 19.1-27.9 | .87 / 22.1 | 48.00±4.50 / 1219.2±114.3 | 14.00±1.50 / 355.6±38.1 | .437 / 11.10 | RED | 20000 / 88964 | | | PHS075 |
| 36613 | 1300950275 | .88-1.12 / 22.4-28.4 | 1.00-1.50 / 25.4-38.1 | 1.25 / 31.8 | 60.00±5.00 / 1524.0±127.0 | 15.00±1.50 / 381.0±38.1 | .500 / 12.70 | DARK BLUE | 30600 / 136116 | | | PHS100 |
| 36614 | 1300950276 | 1.13-1.37 / 28.7-34.8 | 1.25-1.70 / 31.8-43.2 | 1.50 / 38.1 | 76.00±6.00 / 1930.4±152.4 | 18.00±1.50 / 457.2±38.1 | .625 / 15.88 | YELLOW | 46800 / 208177 | | | PHS125 |

* TO DETERMINE RECOMMENDED WORKING LOAD, DIVIDE BREAK STRENGTH BY 5.
 ** FOR ROPE, SELECT SMALLEST SIZE GRIP WHICH MEETS REQUIRED WORK LOAD.

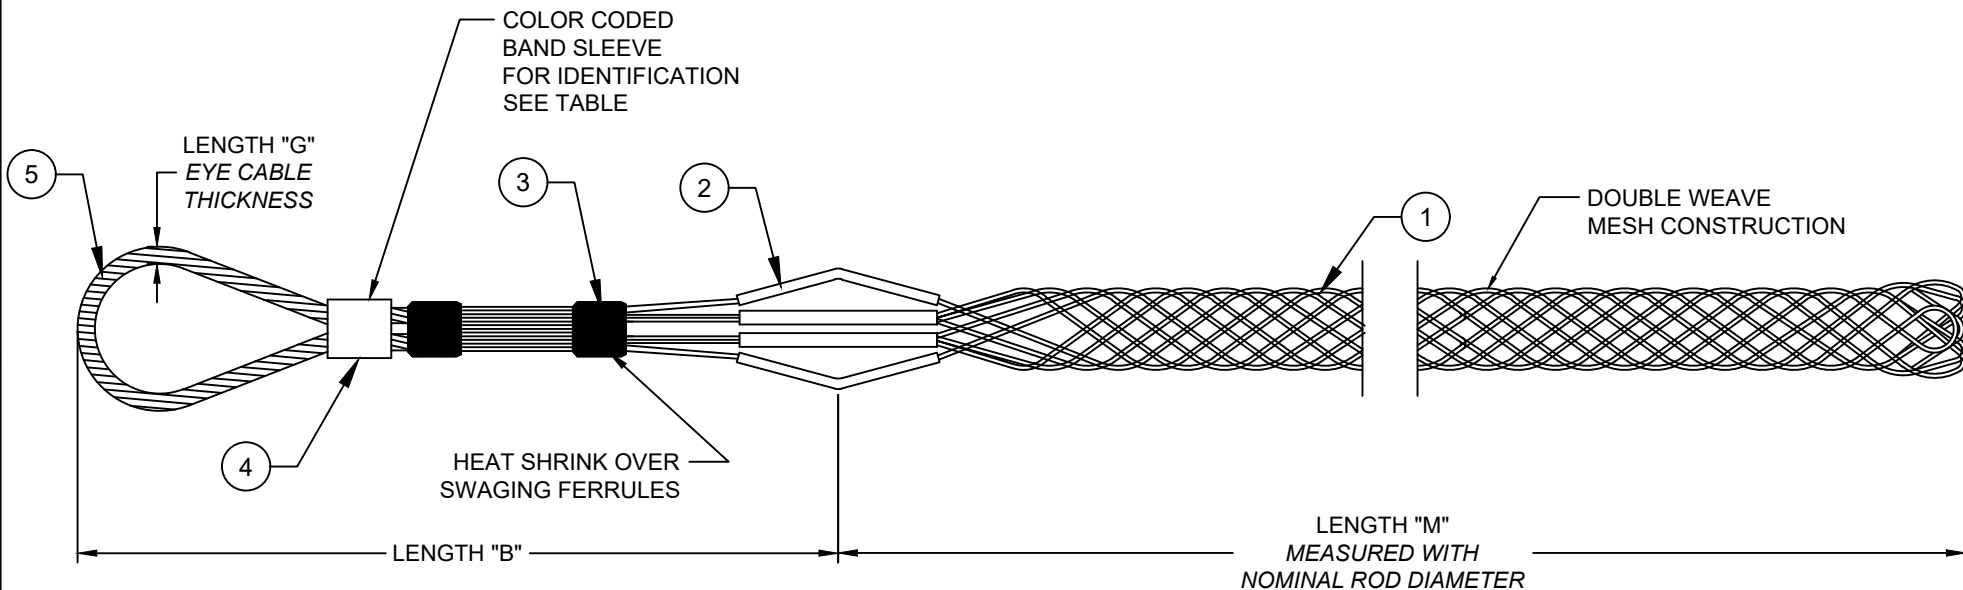

| ITEM | DESCRIPTION | MATERIAL |
|------|--------------------|------------------|
| 1 | WIRE MESH | GALVANIZED STEEL |
| 2 | SHOULDER PROTECTOR | ALUMINUM |
| 3 | SWAGING FERRULE | STAINLESS STEEL |
| 4 | BAND SLEEVE | ALUMINUM |
| 5 | BALE EYE | GALVANIZED STEEL |

| | | | | | | | | | | | | | | | |
|--|---|--------|-------|---------------------------|---|---------|--|---|---|-----------------|--|-------------------|--|--------------|--|
| FUNCTIONAL SYMBOLS FA=0 FC=0 FE=0 | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION | | | | | | | | | | | | | | |
| | DIMENSION UNITS | | SCALE | | CURRENT REV DESC: REMOVED OBSOLETE PART NUMBER AS PER PCN#509987. | | | | INSTRUCTION: SEE TABLE FOR SIZES WITH GRIP. | | | | | | |
| | INCH/MM | | NTS | | EC NO: 693623 | | | | | | | | | | |
| | GENERAL TOLERANCES (UNLESS SPECIFIED) | | | | DRWN: SANTHN 2021/11/22 | | | | | | | | | | |
| mm | | INCH | | CHK'D: SANTHN 2021/12/28 | | | | PULLING GRIPS HIGH STRENGTH FLEXIBLE EYE | | | | | | | |
| 4 PLACES ±---- | | ±---- | | APPR: GGA 2022/03/30 | | | | | | | | | | | |
| 3 PLACES ±---- | | ±0.005 | | INITIAL REVISION: | | | | PRODUCT CUSTOMER DRAWING | | | | | | | |
| 2 PLACES ±0.13 | | ±0.01 | | DRWN: HRUIZ01 2014/09/04 | | | | DOCUMENT NUMBER | | DOC TYPE | | DOC PART REVISION | | | |
| 1 PLACE ±0.25 | | ±0.02 | | APPR: JFMURPHY 2015/03/23 | | | | SD-130095-111 | | PSD | | 001 B | | | |
| 0 PLACES ±---- | | ±---- | | ANGULAR TOL ± 0.5 ° | | | | MATERIAL NUMBER | | CUSTOMER | | SHEET NUMBER | | | |
| DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS | | | | THIRD ANGLE PROJECTION | | DRAWING | | SERIES | | MATERIAL NUMBER | | CUSTOMER | | SHEET NUMBER | |
| | | | | | | A-SIZE | | 130095 | | SEE TABLE | | GENERAL MARKET | | 1 OF 1 | |

DOCUMENT STATUS: P1 RELEASE DATE: 2022/03/30 09:51:32